accucold

SCFF436



81.5" x 54.25" x 29.75" (H x W x D)

39 cu.ft. commercial reach-in freezer with French doors and stainless steel construction

Highlights:

Made in North America in a TAA designated country

Commercially approved for use in foodservice environments

Adjustable cantilevered shelving for flexible storage


Product Features:

Commercial reach-in freezer made in North America	All-freezer designed for use in commercial establishments
TAA compliant	Ideal for GSA contracts and other applications requiring a unit to have been manufactured in a TAA designated country
Commercially listed	UL-S listed to NSF-7 commercial standards
Frost-free	No-frost operation for minimum user maintenance
Fan-cooled interior	Powerful fan-forced cooling to ensure fast temperature recovery
High/low temperature alarm	Audible and visual alarm warns if the temperature goes out of range
Complete stainless steel construction	Interior and exterior are entirely constructed from stainless steel for lasting durability and easy cleanup
Self-closing doors	Doors automatically close if left ajar to help protect items in high traffic settings
Pocket handles	Handles recessed in the side of the doors for more efficiency in crowded facility settings

accucold

SCFF436 Specifications:

Overview	
Height of Cabinet	81.5" (207 cm)
Width	54.25" (138 cm)
Depth	29.75" (76 cm)
Depth with door at 90°	56.25" (143 cm)
Capacity	38.54 cu.ft. (1091 L)
Defrost Type	Frost-Free
Door	Stainless Steel
Cabinet	Stainless Steel
US Electrical Safety	UL
Canadian Electrical Safety	ULC
Sanitation	UL-S
Amps	4.5
Voltage/Frequency	115 V AC/60 Hz
Weight	428.0 lbs. (194 kg)
Shipping Weight	515.5 lbs. (234 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101089188
Freezer	
Door Swing	French
Interior Height	55.0" (140 cm)
Interior Width	49.75" (126 cm)
Interior Depth	25.5" (65 cm)
Shelf Type	Wire
Shelf Qty	8
Adjustable Shelves	Yes
Thermostat Type	Digital
Interior Light	Yes
Fan Type	Interior
Refrigerant Type	R290a
Refrigerant Amount	4.2 oz.
High Side PSI	160.0
Low Side PSI	250.0
Wheels	6
Temperature Range	-5 to +5ºF

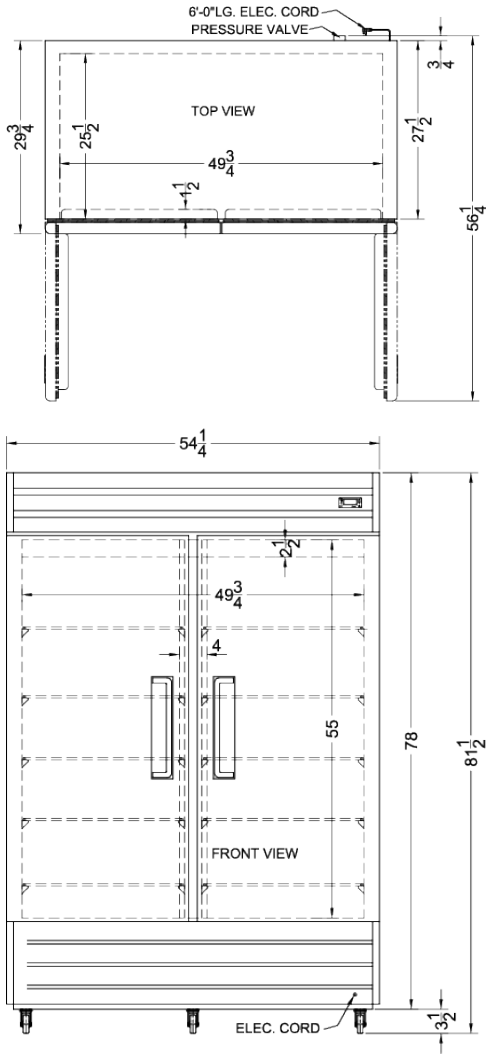

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**