


24" Compact Heat Pump Dryer
Dryer
Available Products: ELFE433CAW
Version: 08/25
Product Specifications
Dryer

| | |
|--------------------------|-----------------|
| Drum Material | Stainless Steel |
| Dryness Level Selections | Yes |
| Lint Filter | Yes |

Dryer Options

| | |
|-----------------|-----|
| Child Lock | Yes |
| Energy Saver | Yes |
| Extended Tumble | Yes |

Controls

| | |
|--------------------------|-----|
| Delay Start | Yes |
| Estimated Time Remaining | Yes |
| Pause Function | Yes |
| Power On/Off | Yes |
| Start | Yes |

Electrical Specifications

| | |
|----------------|-------|
| Voltage Rating | 240 V |
|----------------|-------|

General Specifications

| | |
|------------------|--------|
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

Safety Certifications and Approvals

| | |
|-----------|-----|
| UL Listed | Yes |
|-----------|-----|

Dryer Cycles

| | |
|----------------|-----|
| Cycle Count | 12 |
| Activewear | Yes |
| Bedding | Yes |
| Delicates | Yes |
| Fast Dry | Yes |
| Heavy Duty | Yes |
| Jeans | Yes |
| Mixed Load | Yes |
| My Favorite | Yes |
| Normal | Yes |
| Timed Dry Time | Yes |
| Towels | Yes |

Dryness Level

| | |
|--------|-----|
| High | Yes |
| Normal | Yes |
| Less | Yes |

Dimensions and Volume

| | |
|---------------------|-------------|
| Height | 33 3/10" |
| Width | 23 2/5" |
| Depth | 25 1/5" |
| Dryer Drum Capacity | 4.4 Cu. Ft. |

Installation

| | |
|---------------------|----------|
| Power Cord Included | Yes |
| Stackable | Yes |
| Ventilation Type | Ventless |

Performance Certifications and Approvals

| | |
|-----------------------|-----|
| ENERGY STAR Certified | Yes |
|-----------------------|-----|


Accessories

| | |
|-----------------------------|-----|
| Dryer Stacking Kit Capable | Yes |
| Dryer Stacking Kit Included | No |

Installation Diagram

INSTALLATION REQUIREMENTS

Installation with stacked washing machine and dryer

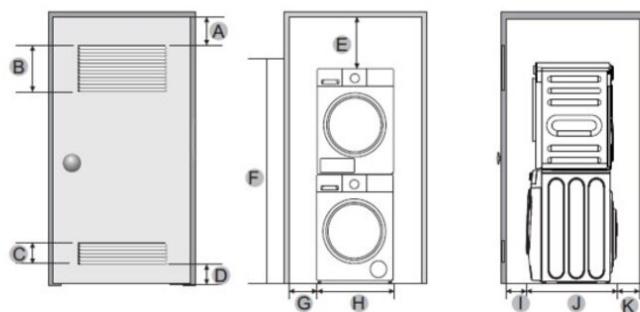

| | | | | | |
|---|---|---|------------------|---|-----------------|
| A | 3in.(76mm) | E | 2in.(50.8mm) | I | 3in.(76mm) |
| B | 48in. ² (3100mm ²) | F | / | J | 25.7 in.(653mm) |
| C | 24in. ² (1550mm ²) | G | 1in.(25.4mm) | K | 2 in.(50.8mm) |
| D | 3in.(76mm) | H | 23.4 in. (595mm) | | |

● NOTE


- The front of the closet must have two unobstructed air openings for a combined minimum total area of 72 sq.in. (465 sq.cm) with a minimum clearance of 3 in. (76mm) at the top and bottom. A slatted door with equivalent space clearance is acceptable.

Alcove or closet or wall insert/recessed installations

WARNING  • No other fuel-burning appliance should be installed in the same closet as the dryer.

Minimum clearances between the dryer and adjacent walls or other surfaces :

| | | | |
|-------|----------------|--------------|----------------|
| Sides | 1 in. (25.4mm) | Rear | 2 in.(50.8mm) |
| Top | 2 in. (50.8mm) | Closet front | 2 in. (50.8mm) |

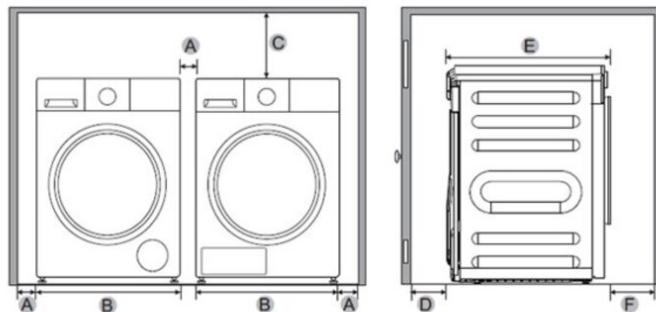

| | | | | | |
|---|------------------|---|---------------|---|-----------------|
| A | 1 in.(25.4mm) | C | 2 in.(50.8mm) | E | 25.7 in.(595mm) |
| B | 23.4 in. (550mm) | D | 2 in. (51mm) | F | 2 in. (50.8mm) |