# SUB\*ZERO

### BI-30UG/S



### **FEATURES**

LED Lighting for brighter interior

Dual refrigeration keeps food fresher longer

Air purification system fights spoilage, odors

Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness

Microprocessor control assures peak performance

Water-filtration system for ice reduces contaminants, chlorine taste and odor

Freshness cards for maximum food preservation

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional 24/7 support from Madison, WI-based Customer Care team

Over-and-under refrigerator/freezer storage

Magnetic door seal system locks in cold air

Automatic ice maker with "max ice" feature

**Dual Installation Kit** 

Stainless Steel Kickplate
Stainless Steel Side Panel

Water Filter 4204490
White Side Panel

Side panel mounting kit

Egg Container

Adjustable shelves for maximum convenience

Clear-view, triple-pane and UV-resistant glass door

ACCESSORIES	
7007247	
7007248	
7007251	
7007253	
7008833	
7008836	
7008889	
7008892	
7008895	
7010799	
7013555	
90° Door Stop	
Air Purification Cartridge	



### **HANDLE OPTIONS**



### **PRODUCT DETAILS**

### **REFRIGERATOR**

- 3 Adjustable glass shelves
- 1 Stationary glass shelf
- · 1 High-humidity drawer with dividers
- · 1 Storage drawer with dividers

### **FREEZER**

- · Full-extension roll-out freezer drawer
- · Two-tier wire storage baskets
- · Automatic ice maker

Dual Installation Kit with Dual Wide Grille

Built-In Stainless Steel Pro Louvered Grilles

Accessories are available through an authorized dealer. For local dealer information, visit  $\underline{\text{subzero-wolf.com/locator}}.$ 

Specifications are subject to change without notice. This information was generated on November 30, 2018. Verify specifications prior to finalizing your cabinetry/enclosures.



### **PRODUCT SPECIFICATIONS**

Model	BI-30UG/S
Dimensions	30"W x 84"H x 24"D
Door Clearance	31 1/4"
Drawer Clearance	23 5/8"
Weight	476 lbs
Refrigerator Capacity	13.1 cu. ft.
Freezer Capacity	4.2 cu. ft.
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type

### **ELECTRICAL**

# 7" (178) | 6" (152) 75<sup>1</sup>/2" (1918) FROM FLOOR RIGHT SIDE OF OPENING

# **PLUMBING**




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

# **INTERIOR VIEW**




This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

### **DIMENSIONS**

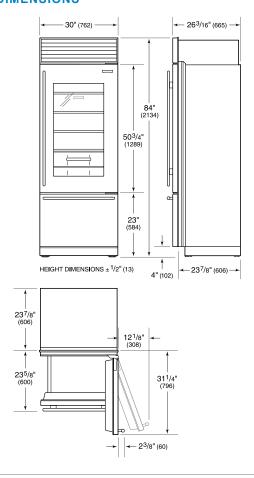

## STANDARD INSTALLATION

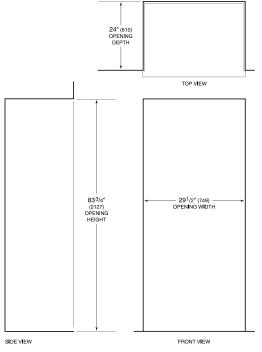

NOTE: Shaded line represents profile of unit.