24″ LED DROP-IN INDUCTION COOKTOP

24″ — BLACK GLASS

INDUCTION HARDWARE

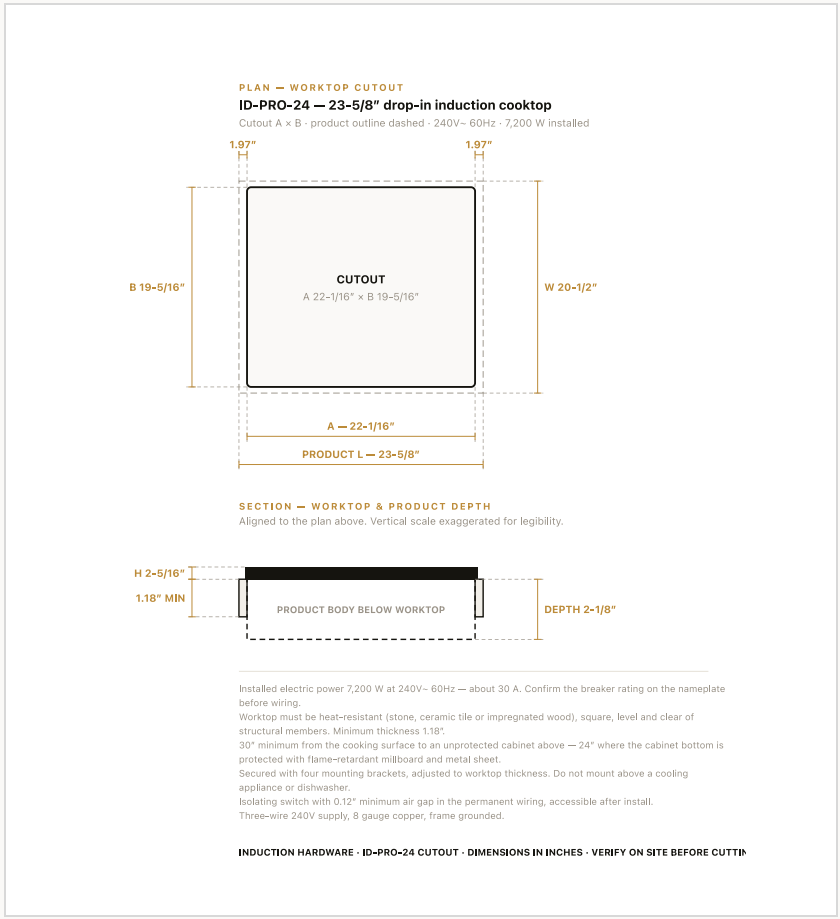



SPECIFICATIONS

SKU	**ID-PRO-24**
Product L × W × H	**23-5/8 × 20-1/2 × 2-5/16 in**
Cutout A × B	**22-1/16 × 19-5/16 in**
Cutout depth	**2⅛ in**
Supply voltage	**240 V~ 60 Hz**
Circuit	**240 V · 30 A dedicated**
Cooking zones	**4**
Installed electric power	**7,200 W**
Minimum conductor	**8 AWG copper**
Product weight	**33 lb**
Certification	**ETL**

Installation — Cutout dimensions are the cabinet opening, not the product outline. Clearances: 30 in above the cooking surface, 1.97 in min under the counter, 0.79 in min cabinet set-back, 0.20 in air exit — the air inlet and outlet must stay clear. Secure with the four mounting brackets, adjusted to the counter thickness, then connect through a UL-listed conduit connector to a 3-wire 240 V supply.

OVERVIEW

Drop-in induction with LED zone indicators in black glass. Roughly 90% of energy reaches the pan; with no cookware detected the surface auto-shuts off.

KEY FEATURES

- ~90% efficient · 90-second boil
- LED zone indicators
- Auto shut-off with no cookware detected
- Glass overhangs the cutout on all four sides — never cut to product size
- Lifetime parts warranty · Restore & Renew refurbishment

BURNER POWER BY ZONE

Zone	Standard	Boost
1	1200 W	**1500 W**
2	2300 W	**3000 W**
3	1800 W	**2100 W**
4	1200 W	**1500 W**

4 zones · 7,200 W total. Standard is the continuous output at level 9; boost runs above it for five minutes, then the zone drops to level 9. Zones are numbered from the manual layout, viewed from above with the control panel at the front.

30″ LED DROP-IN INDUCTION COOKTOP

30″ — BLACK GLASS

INDUCTION HARDWARE

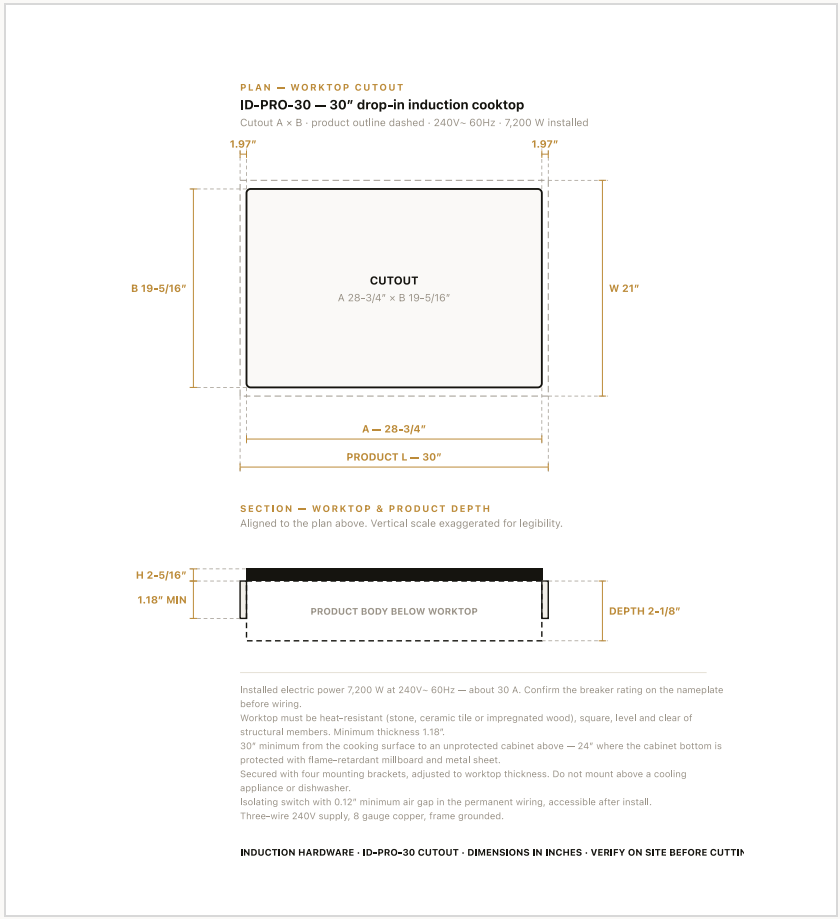



SPECIFICATIONS

SKU	**ID-PRO-30**
Product L × W × H	**30 × 21 × 2-5/16 in**
Cutout A × B	**28-3/4 × 19-5/16 in**
Cutout depth	**2⅛ in**
Supply voltage	**240 V~ 60 Hz**
Circuit	**240 V · 30 A dedicated**
Cooking zones	**4**
Installed electric power	**7,200 W**
Minimum conductor	**8 AWG copper**
Product weight	**34 lb**
Certification	**ETL**

Installation — Cutout dimensions are the cabinet opening, not the product outline. Clearances: 30 in above the cooking surface, 1.97 in min under the counter, 0.79 in min cabinet set-back, 0.20 in air exit — the air inlet and outlet must stay clear. Secure with the four mounting brackets, adjusted to the counter thickness, then connect through a UL-listed conduit connector to a 3-wire 240 V supply.

OVERVIEW

Drop-in induction with LED zone indicators in black glass. Roughly 90% of energy reaches the pan; with no cookware detected the surface auto-shuts off.

KEY FEATURES

- ~90% efficient · 90-second boil
- LED zone indicators
- Auto shut-off with no cookware detected
- Glass overhangs the cutout on all four sides — never cut to product size
- Lifetime parts warranty · Restore & Renew refurbishment

BURNER POWER BY ZONE

Zone	Standard	Boost
1	1200 W	**1500 W**
2	1800 W	**2100 W**
3	2300 W	**3700 W**
4	1200 W	**1500 W**

4 zones · 7,200 W total. Standard is the continuous output at level 9; boost runs above it for five minutes, then the zone drops to level 9. Zones are numbered from the manual layout, viewed from above with the control panel at the front.

36″ LED DROP-IN INDUCTION COOKTOP

36″ — BLACK GLASS

INDUCTION HARDWARE

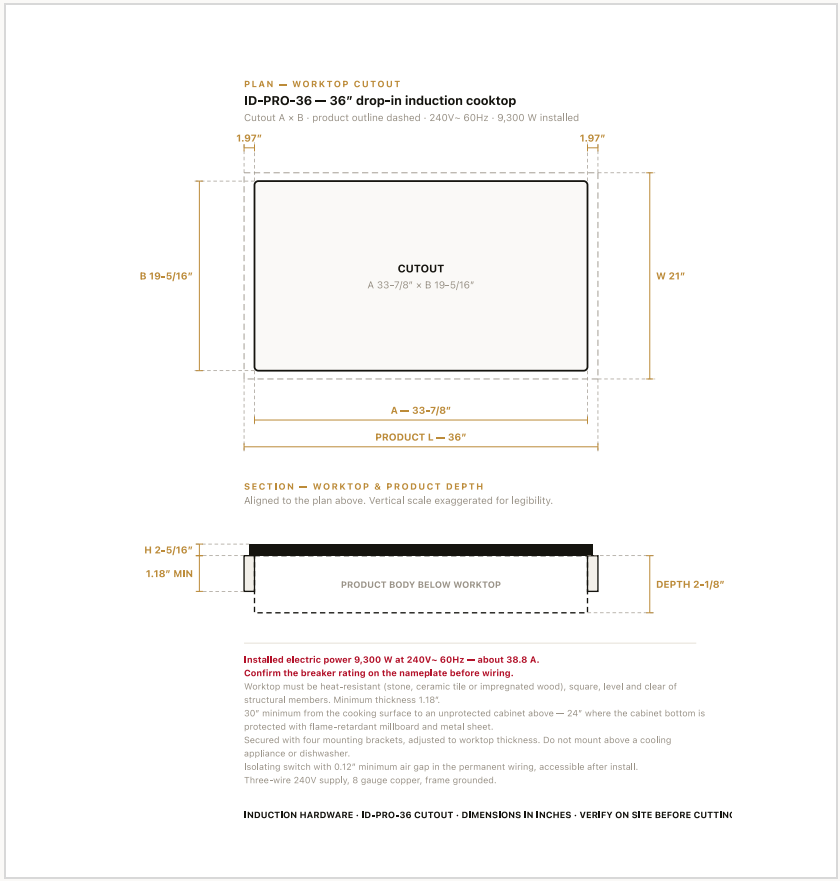



SPECIFICATIONS

SKU	**ID-PRO-36**
Product L × W × H	**36 × 21 × 2-5/16 in**
Cutout A × B	**33-7/8 × 19-5/16 in**
Cutout depth	**2⅛ in**
Supply voltage	**240 V~ 60 Hz**
Circuit	**240 V · 40 A dedicated**
Cooking zones	**5**
Installed electric power	**9,300 W**
Minimum conductor	**8 AWG copper**
Product weight	**45 lb**
Certification	**ETL**

OVERVIEW

Drop-in induction with LED zone indicators in black glass. Roughly 90% of energy reaches the pan; with no cookware detected the surface auto-shuts off.

KEY FEATURES

- ~90% efficient · 90-second boil
- LED zone indicators
- Auto shut-off with no cookware detected
- Glass overhangs the cutout on all four sides — never cut to product size
- Lifetime parts warranty · Restore & Renew refurbishment

BURNER POWER BY ZONE

Zone	Standard	Boost
1	1200 W	**1500 W**
2	1800 W	**2100 W**
3	2300 W	**3700 W**
4	1800 W	**2100 W**
5	1200 W	**1500 W**

5 zones · 9,300 W total. Standard is the continuous output at level 9; boost runs above it for five minutes, then the zone drops to level 9. Zones are numbered from the manual layout, viewed from above with the control panel at the front.

Installation — Cutout dimensions are the cabinet opening, not the product outline. Clearances: 30 in above the cooking surface, 1.97 in min under the counter, 0.79 in min cabinet set-back, 0.20 in air exit — the air inlet and outlet must stay clear. Secure with the four mounting brackets, adjusted to the counter thickness, then connect through a UL-listed conduit connector to a 3-wire 240 V supply.