



RC462700
Refrigerator column 400 series
fully integrated
Niche width 24" (61 cm), Niche height 84" (213.4 cm)

- Stainless steel interior
- Generous lighting concept
- Solid aluminum door bins
- Net volume 13.1 cu.ft. (370 liters)
- Temperature control drawer (32 °F to 37 °F)
- One motorized glass shelf, adjustable when fully loaded
- Energy star® qualified

Operation

Electronic precision temperature control with digital temperature display.

Technical features

Dynamic cool air distribution with Multi-Flow Air system.
 Automatic defrosting with defrost water evaporation.
 Activated charcoal air filter.
 Energy-saving vacation mode.
 Open-door and malfunction warning system.

Cooling compartment

Net volume 13.1 cu.ft. (314 liters).
 No-frost technology with fast cooling.
 Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C).
 Four safety glass shelves (one is motorized, two are manually adjustable).
 Two fully extendable drawers (low and high) with transparent front.
 Bright interior lighting with two ceiling spotlights and two halogen light pillars on the side.
 3 height adjustable door bins, one of which is a large gallon door bin.
 One door bin with transparent front flap.

Temperture control drawer

Net volume 2 cu. ft. (56 liters).
 Separate automatic temperature control with settings for poultry, fish, meat and produce.
 A large, fully-extendable drawer with transparent front and integrated lighting.

Consumption data

Energy consumption 0.762 kwh/24 h.

Planning notes

Flat hinge.
 Door hinge right, reversible.
 Door opening angle of 115°, optional 90° door stop.
 Plan the power outlet and water connection behind the appliance per installation instructions.
 Connecting cable 78 3/4" with plug.

Rating

120 V / 60 Hz
 Total Amps: 15 A
 Total connected load 0.18 kW.
 Max. door panel weight 21 kg.

Product Features

Multi-Flow Air Tower
 Yes
SUPERCOOL
 Yes
SUPERFREEZE
 No
Carbon Air Filter
 No
Temperature Controlled Drawer
 Yes
Humidity Control Drawer
 Yes
Number of Door Bins - Refrigerator
 2
Adjustable Door Bins - Refrigerator
 No
Tilt-Out Door Bins - Refrigerator
 Yes
Gallon Storage Bins
 1
Number of Shelves - Refrigerator
 4
Door Hinge
 Right reversible
Adjustable Shelves - Refrigerator
 3
Number of Shelves - Freezer
 1
Reversible Door Hinge
 Yes
Adjustable Shelves - Freezer
 No

Consumption and connection features

UPC code
 825225847762
Color / Material housing
 Colour.Material door
Panel ready
Silence level (dBA)
 39
Watts (W)
 180
Current (A)
 15
Volts (V)
 120
Frequency (Hz)
 60
Energy consumption (kWh/yr)
 278.13
Energy Star® qualified
 Yes
Approval certificates
 ETL, ETL C
Power cord length (in)
 78 3/4"
Required cutout size (HxWxD) (in)
 84" x 24" x 24 3/4"
Appliance Width (in)
 23 3/4 "
Height (in)
 83 3/4 "
Depth (in)
 24"
Capacity in 0.75l (bordeaux bottles)
Total unit gross capacity (cu. ft.) - AHAM
 13
Product packaging dimensions (HxWxD) (in)
 89.76 x 27.16 x 29.13
Refrigerator Gross capacity (cu. ft.)
 13
Freezer Gross capacity (cu ft)
Net weight (lbs)
 392
Gross weight (lbs)
 425
SKU
 RC462700
2013-07-01
 Page 1

Color Variants



RC462700
fully integrated
Niche width 24" (61 cm), Niche height 84" (213.4 cm)

Included accessories


1 x egg box with lid.

Product Variants


RC472700
Refrigerator column 400 series
fully integrated
Niche width 30" (76.2 cm), Niche height 84" (213.4 cm)

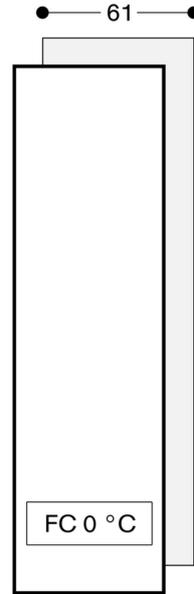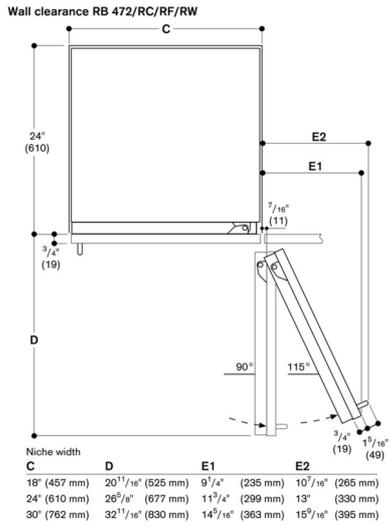

Door opening angle

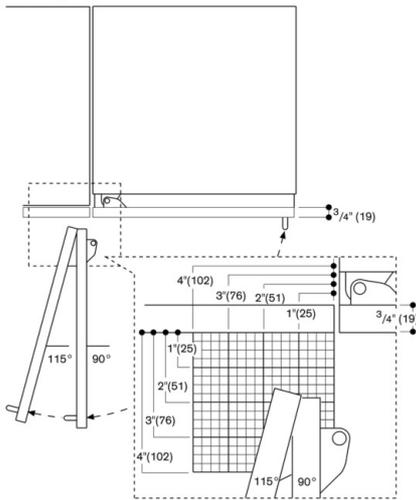

The space required for the hinge and the consequential distance to the adjacent unit and its handle can be seen in the above drawing, depending on the thickness. The drawing assumes a panel thickness of 19 mm.

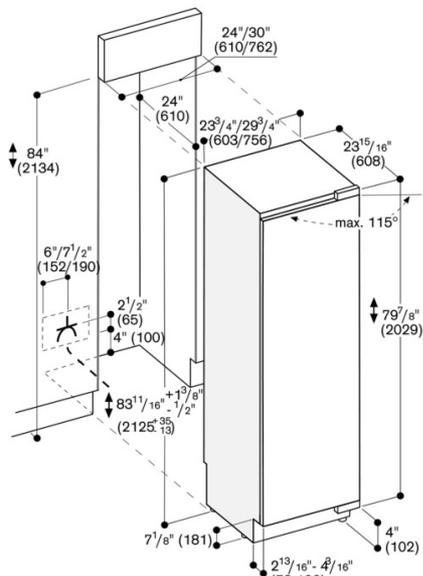

The maximum door front measurements are designed for a gap measurement of 3 mm.