

DELRAY

LINEAR

ELEGANTLY SIMPLE

DRL3613
DRL4813

SINGLE SIDED
DIRECT VENT

QUICK DIMENSIONS

	DRL3613		DRL4813	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	45 $\frac{1}{4}$	43 $\frac{3}{8}$	57 $\frac{1}{4}$	55 $\frac{3}{8}$
B.WIDTH	41 $\frac{3}{8}$	43 $\frac{3}{8}$	53 $\frac{1}{16}$	55 $\frac{3}{8}$
HEIGHT	26 $\frac{3}{4}$	33 $\frac{11}{16}$	26 $\frac{3}{4}$	33 $\frac{11}{16}$
DEPTH	12 $\frac{3}{4}$	14 $\frac{1}{4}$	12 $\frac{3}{4}$	14 $\frac{1}{4}$
VIEWING	36 $\frac{1}{2}$ x 14 $\frac{11}{16}$		48 $\frac{1}{2}$ x 14 $\frac{11}{16}$	

DELRAY FULL LOAD LINEAR

Standard

Concealed burner with Ice fireglass
Multi-function remote control
Remote controlled fans
Micro mesh safety screen
Black reflective glass
Halogen downlighting
Battery backup
Cement board

Options

Propane conversion kit
Adjustable trim kits
Speckled stones, driftwood, glass media
Heat management
WiFi phone app control

DELRAY BASIC LINEAR

Standard

Concealed burner with Ice fireglass
Cement board

Options

Remote control
Fans
Micro mesh safety screen
Black reflective glass
Propane conversion kit
Adjustable trim kits
Battery backup
Speckled stones, driftwood, glass media
Heat management



BTU LISTING

DRL3613NI-2 / 16,000
DRL3613LI-2 / 16,000

DRL4813NI-2 / 21,000
DRL4813LI-2 / 19,000
BTU is the same for basic and for fully loaded units

EFFICIENCY P.4. 1-15


DRL3613NI / 71%
DRL3613NI-2 / 71%
DRL3613LI / 71%
DRL3613LI-2 / 71%

DRL4813NI / 63%
DRL4813NI-2 / 63%
DRL4813LI / 60%
DRL4813LI-2 / 60%





DELRAY DIMENSIONS

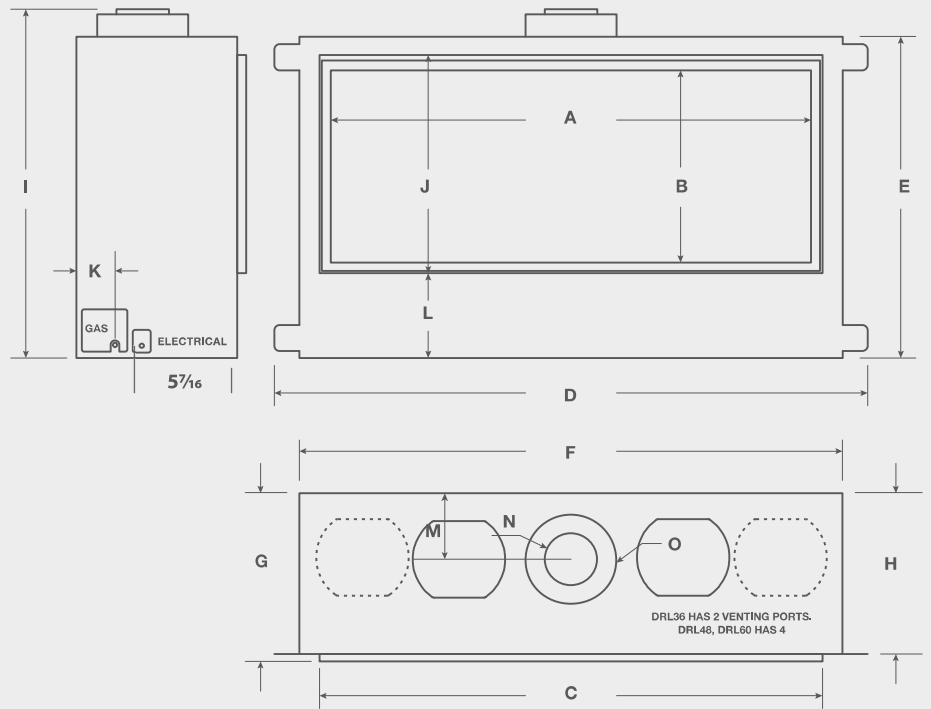

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DRL36	36 1/2	14 11/16	38 3/8	45 1/4	24 1/4	41 3/8	12 3/4	12 5/16	26 3/4	16 5/8	3 3/8	6 9/16	5	4	7
DRL48	48 1/2	14 11/16	50 5/16	57 1/4	24 1/2	53 7/16	12 3/4	12 5/16	26 3/4	16 5/8	3 3/8	6 9/16	5	4	7



MONTIGO / DELRAY / LINEAR / DRL4813NI-2 / DRIFTWOOD SPECKLED STONES



MONTIGO / DELRAY / LINEAR / DRL3613NI-2 / ICE FIREGLASS / REFLECTIVE BLACK GLASS



REMOTE^{†‡}
RX200**

[†]Standard for full load units
[‡]Full load units only



WALL REMOTE[†]
EC1550



WIFI PHONE APP
CONTROL[†]
SIT-WIFI



BLACK GLASS[†]
RBGDRL**



DOWNLIGHTING^{†‡}



TRIM KIT
DRLT**_*

Unit Specifications

ICON LEGEND

AVAILABLE

+

NOT AVAILABLE

-

DEDICATED


◊

STANDARD

◊

	BTU NATURAL GAS	BTU LIQUID PROPANE	NG EFFICIENCY	LP EFFICIENCY	VENTING	CLEARANCE TOP	CLEARANCE SIDES	CLEARANCE BACK	CLEARANCE FLOOR	FRONT VIEWING AREA	FRONT GLASS TYPE	STANDARD MEDIA	MICRO MESH SAFETY SCREEN	POWERVENT	REMOTE CONTROL	FANS	UPLIGHTING	DOWNLIGHTING
DRL3613*I-2	16,000	16,000	71%	71%	4"/7"	21	1	2	0	36½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL3613*I	16,000	16,000	71%	71%	4"/7"	21	1	2	0	36½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	-	-	-
DRL4813*I-2	21,000	19,000	63%	60%	4"/7"	21	1	2	0	48½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL4813*I	21,000	19,000	63%	60%	4"/7"	21	1	2	0	48½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	-	-	-
DRL6013*I-2	28 000	25 000	64%	64%	4"/7"	36	1¾	2	0	60½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL6013*I	28 000	25 000	67%	64%	4"/7"	36	1¾	2	0	60½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	+	-	-
DRL7213*I-2	35 000	32 000	64%	66%	5"/8"	38½	1¾	2	0	72½ X 14⅞	HIGH TEMPERATURE	HW1157	◊	+	◊	◊	-	◊
DRL7213*I	35 000	32 000	66%	67%	5"/8"	38½	1¾	2	0	72½ X 14⅞	HIGH TEMPERATURE	HW1157	+	+	+	+	-	-

DELRAY LINEAR FRAMING

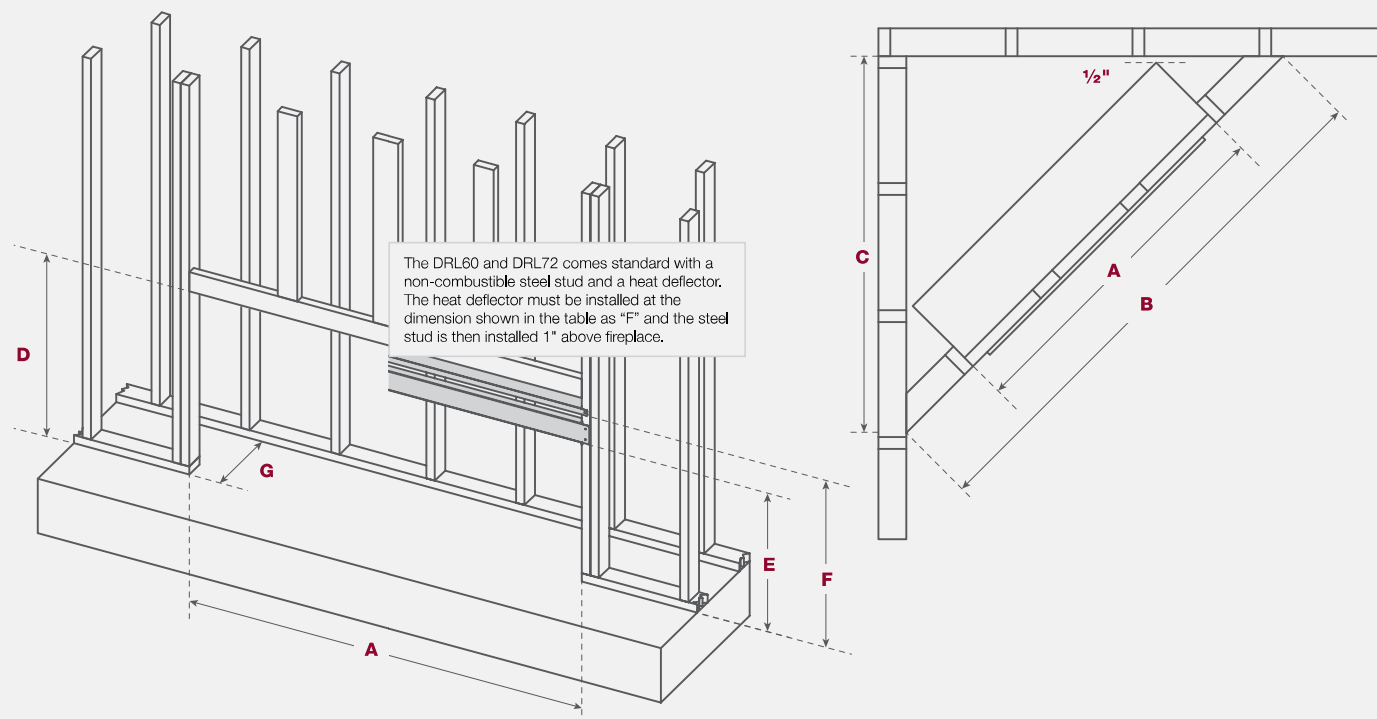

	A	B	C	D	E	F	G
DRL3613	43⅜	67⅞	47½	33⅞	N/A	N/A	14¼
DRL4813	55⅜	79¼	56⅞	33⅞	N/A	N/A	14¼
DRL6013	68⅞	91⅞	64½	33⅞	25½	30⅞	14¼
DRL7213	81	106⅞	78⅞	33⅞	26½	30⅞	16