



## D60 Series Director Collection

The Director 60 series is both powerful and discreet. Its two-way design in four performance levels offers a solution for systems that demand sonic purity in smaller spaces. Sharing technologies with its larger siblings, the 60 series will surprise listeners with its detail and impact.



D68



D66



D64



D62DT/SUR



D62



D60DT/SUR



D60

### Director Technology

The entire speaker pivots allowing the sound to be directed toward the listening area from anywhere in the room.

### DPDS™ Tweeter

Featured in the C68 and C66, this patented tweeter has the greatest output and is able to crossover much lower to either the woofer or the midrange improving both dispersion and the frequency response.

### Woofer Cone Materials

Designed from the ground up, we only use the finest materials for our woofers to ensure optimal performance in response with speed and precision.

### Compression Molded Baskets

These complex baskets that support the woofer cones were computer designed and compression molded with absolute precision allowing for unique support and venting elements to assure peak performance.

### Tool-less Mounting System

The ZipClip™ secures the speaker in the ceiling with the exact torque to ensure a tight fit. This is accomplished by squeezing the clips into place and locking the speaker with a twist.

### X-Wave™ Woofer Surround



This suspension element absorbs unwanted frequencies that reflect up and down the woofer cone to reduce harmonic distortion while maintaining the desired linear travel of the woofer.

### EQ Adjustment

These switches on the baffle allows the adjustment of the output of either the high frequencies or both high and low frequencies to custom tailor the sound based on the proximity of the architectural elements of the room.

# Specifications

Model	D68	D66	D64	D62DT/SUR	D62	D60DT/SUR	D60
Part Number	SCD60800	SCD60600	SCD60400	SCD2T60200	SCD60200	SCD2T60000	SCD60000
Woofer Cone	Kevlar	Glass Fiber	IMG	IMG	IMG	IMG	Poly/Rubber
Woofer Dimensions	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)	6.5" (165mm)
Tweeter Dome	Silk DPSD	Silk DPSD	Aluminum	Aluminum	Aluminum	Silk	Silk
Tweeter Diameter	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)	1" (25mm)
Frequency Response	40 Hz - 20 kHz	43 Hz - 20 kHz	45 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz	48 Hz - 20 kHz
Impedance	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Power Handling	25 - 160 Watts	25 - 150 Watts	25 - 140 Watts	25 - 125 Watts	25 - 125 Watts	25 - 125 Watts	25 - 125 Watts
Diameter	9.75" (248mm)	9.75" (248mm)	9.75" (248mm)	9.75" (248mm)	9.75" (248mm)	9.75" (248mm)	9.75" (248mm)
Grille Diameter	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)	10" (254mm)
Cutout Diameter	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)	8.75" (222mm)
Mounting Depth	5.375" (135mm)	5.375" (135mm)	5.375" (135mm)	5.375" (135mm)	3.5" (89mm)	3.3" (84mm)	3.3" (84mm)

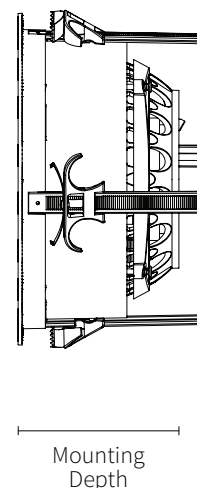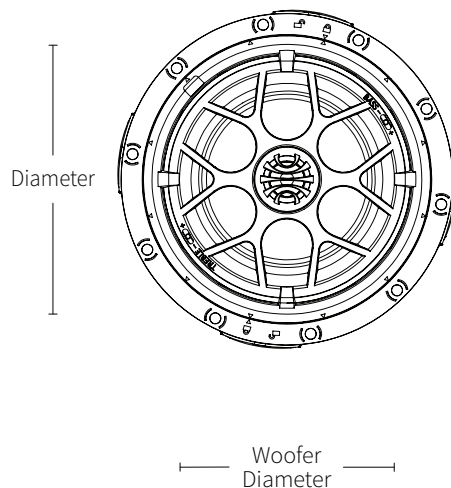

\*Not to Scale