

DLEX3700_/DLGX3701_

7.4 cu. ft. Front Load Dryer

7.4 cu. ft. Capacity

12 Dryer Programs

TurboSteam™

SmartThinQ® Technology

Wi-Fi Connectivity

SmartDiagnosis™

ENERGY STAR® Qualified



Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG SmartThinQ® app

SmartThinQ®

works with the
Google AssistantWORKS WITH
alexa

SUMMARY

| | |
|-----------------|-------------------------------|
| Capacity | 7.4 cu. ft. |
| Matching Washer | WM3700H_A |
| Sensor Dry | Yes |
| Steam | Yes |
| Colors | White (W), Graphite Steel (V) |

APPEARANCE

| | |
|--|-----|
| Intelligent Electronic Controls with LED Display | Yes |
| Dial-A-Cycle™ | Yes |
| Touch Buttons | Yes |

DRYER PROGRAMS

| | |
|-----------------|--|
| No. of Programs | 12 |
| | Normal, Heavy Duty, Bedding, Anti Bacterial, SteamSanitary™, SteamFresh™, Perm. Press, Delicates, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded |

DRYER OPTIONS

| | |
|----------------|--|
| No. of Options | 12 |
| | More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Custom Program, PGM Save, Wi-Fi Connect, Energy Saver, TurboSteam™, Reduce Static, Remote Start |

| | |
|----------------------|--|
| Temperature Settings | High, Medium High, Medium, Low, Ultra Low |
| Drying Levels | Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry |
| Manual Dry Times | 60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time |

FABRIC CARE FEATURES

| | |
|--|-------------|
| Sensor Dry | Yes |
| Precise Temperature Control with Variable Heater | Yes |
| Steam | TurboSteam™ |

CONVENIENCE FEATURES

| | |
|--|---|
| 3 Minute Installation Check | Yes |
| LoDecibel™ Quiet Operation | Yes |
| End of Cycle Signal | Yes |
| Drum Light | Yes |
| Reversible Door | Yes |
| FlowSense™ Duct Clogging Indicator | Yes |
| Wrinkle Care Option | Yes |
| Child Lock | Yes |
| Venting Option | Gas: 3 Way Venting Electric: 4 Way Venting |
| 4 Adjustable Legs | Yes |
| Remaining Time Display/Status Indicator(s) | Yes |

SMARTTHINQ® TECHNOLOGY

| | |
|-----------------------------------|-------------|
| SmartDiagnosis™ | Yes |
| Wi-Fi | Yes |
| Remote Control | Yes |
| Cycle Monitoring and Notification | Yes |
| Energy Monitoring | Yes (Wi-Fi) |

ENERGY

| | |
|------------------------|-----|
| ENERGY STAR® Qualified | Yes |
|------------------------|-----|

MATERIALS AND FINISHES

| | |
|-----------------------------|-------------------------------|
| Aluminized Alloy Steel Drum | Yes |
| Tub Rear | Painted |
| Cabinet | Painted Steel |
| Door | Round w/ Chrome trim |
| All Available Colors | White (W), Graphite Steel (V) |

POWER SOURCE

| | |
|-------------------------|---|
| Ratings | CSA Listed |
| Electrical Requirements | 120V, 15 Amps (Gas) / 240V 30 Amps (Electric) |
| Type | Gas (DLGX3701_) Electric (DLEX3700_) |
| BTU Rating | 10,000 Feet |

OPTIONS

| | |
|-------------------|---|
| LP Conversion Kit | LPK1 |
| Side Venting Kit | 383EEL9001B |
| Pedestal | WDP4W |
| Pedestal (WxHxD) | 27 x 14 1/8 x 30 3/4 (50 1/2 D with door open) |

DIMENSIONS

| | |
|----------------------|-------------------------------|
| Product (WxHxD) | 27" x 38 11/16" x 30" |
| Depth with Door Open | 51" |
| Carton (WxHxD) | 29 19/32" x 43 3/8" x 31 3/8" |
| Weight (Product) | Gas: 125.7 Electric: 123 |
| Weight Carton | Gas: 138.9 Electric: 136.2 |

WARRANTY

| | |
|-----------------|--------|
| Parts and Labor | 1 Year |
|-----------------|--------|

UPC CODES

| | |
|---|--------------|
| DLEX3700W (Electric Dryer White) | 048231024969 |
| DLGX3701W (Gas Dryer White) | 048231024976 |
| WM3700HWA (Washer White) | 048231024624 |
| WDP4W (Pedestal White) | 048231011211 |
| DLEX3700V (Electric Dryer Graphite Steel) | 048231024921 |
| DLGX3701V (Gas Dryer Graphite Steel) | 048231024938 |
| WM3700HVA (Washer Graphite Steel) | 048231024600 |
| WDP4V (Pedestal Graphite Steel) | 048231011198 |

LG COOKING

DLEX3700_/DLGX3701_

7.4 cu. ft. Front Load Dryer

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


DIMENSIONS

| | |
|------------------------|-------------------------------|
| A Width | 27" |
| B Height | 38 11/16" |
| C Depth | 30" |
| D Depth with Door Open | 51" |
| Carton (WxHxD) | 29 19/32" x 43 3/8" x 31 3/8" |

ENERGY / POWER SOURCE

| | |
|-------------------------|---|
| ENERGY STAR® Qualified | Yes |
| Ratings | CSA Listed |
| Electrical Requirements | 120V, 15 Amps (Gas) / 240V 30 Amps (Electric) |
| Type | Gas (DLGX3701_) / Electric (DLEX3700_) |
| BTU Rating | 10,000 Feet |

DIMENSIONS AND CLEARANCES

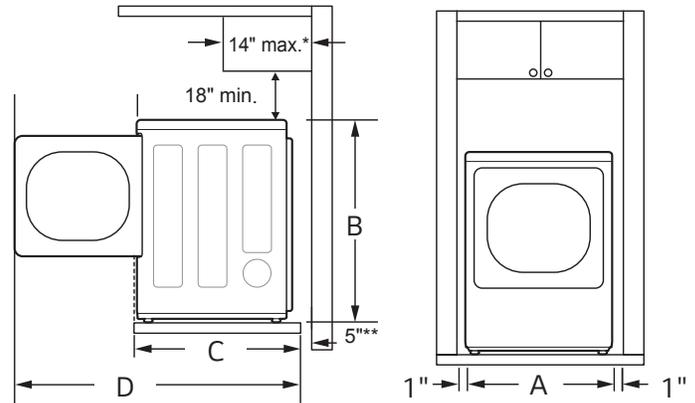


* Required spacing

** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

CONNECTING THE GAS SUPPLY


- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.
- Use only a new stainless steel flexible connector and a new AGA-certified connector.
- A gas shutoff valve must be installed within 6 ft. (1.8 m) of the dryer.
- The dryer is configured for natural gas when shipped from the factory. Make sure that the dryer is equipped with the correct burner nozzle for the type of gas being used (natural gas or propane gas).
- If necessary, the correct nozzle (for the LP nozzle kit, order part number 383EEL3002D) should be installed by a qualified technician and the change should be noted on the dryer.
- All connections must be in accordance with local codes and regulations. Gas dryers MUST exhaust to the outdoors.

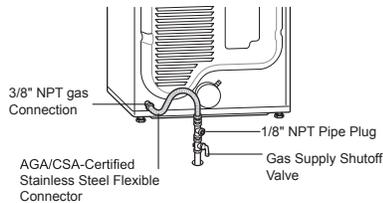

VENTING / DUCTWORK

NOTE: Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.



- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).
- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.

| Wall Cap Type | Number of 90° Elbows | Maximum length of 4-inch diameter rigid metal duct |
|--|----------------------|--|
|  a: 4" (10.2 cm) | 0 | 65 ft.(19.8 m) |
| | 1 | 55 ft.(16.8 m) |
| | 2 | 47 ft.(14.3 m) |
| | 3 | 36 ft.(11.0 m) |
|  b: 2.5" (6.35 cm) | 0 | 55 ft.(16.8 m) |
| | 1 | 47 ft.(14.3 m) |
| | 2 | 41 ft.(12.5 m) |
| | 3 | 30 ft.(9.1 m) |
| | 4 | 22 ft.(6.7 m) |

CONNECTING ELECTRIC DRYERS

- A 4-wire connection is required for all mobile and manufactured home installations, as well as all new construction **after January 1, 1996**.
- A 3-wire connection is **NOT permitted** on new construction **after January 1, 1996**.
- A UL-listed strain relief is required.
- Use a 30-amp, 240-volt, 4-wire, UL-listed power cord with #10 AWG-minimum copper conductor and closed loop or forked terminals with upturned ends.

