CIT304BB 30-INCH HERITAGE INDUCTION COOKTOP

MASTERPIECE® COLLECTION BLACK GLASS, FRAMELESS













FEATURES & BENEFITS

- 11" Heating Zone: accommodate large pots and pans with the ultra-spacious 11" heating zone and powerful at 3,600 \mbox{W}
- 17 Power Levels: provide precise cooking with an illuminated touch control panel that is easy to clean
- The Favorite button: allows you to access your preferred cooking functions through the Home Connect® app with a single touch, including features like keep warm, PanBoost® and hood control
- PowerBoost®: increases element power by up to 50%, saving time to heat up pots or boil water quickly.
- CookSmart®: ensures optimal results with 11 pre-set temperature levels programmed for cooking different types of food
- Wi-Fi Enabled: allows for convenient remote monitoring with access to cooktop programs and settings via the Home Connect® app

GENERAL PROPERTIES		
Controls Touch Controls		
ELEMENT PERFORMANCE		
Power of Front Left Heating Element	1,400 W	
Power of Front Left Heating Element (In Boost)	2,200 W	
Power of Back Left Heating Element	2,200 W	
Power of Back Left Heating Element (In Boost)	3,600 W	
Power of Front Right Heating Element	1,400 W	
Power of Front Right Heating Element (In Boost)	2,200 W	
Power of Back Right Heating Element	2,600 W	
Power of Back Right Heating Element (In Boost)	3,600 W	
Burners With Booster	All 4	
ELEMENT SIZE		
Dimension of Front Left Heating Element	6"	
Dimension of Back Left Heating Element	9"	
Dimension of Back Right Heating Element	11"	
Dimension of Front Right Heating Element	6"	
TECHNICAL DETAILS		
TECHNICAL DETAILS Watts (W)	6,240 / 7,200 W	
	6,240 / 7,200 W 30 A	
Watts (W)		
Watts (W) Circuit Breaker (A)	30 A	
Watts (W) Circuit Breaker (A) Volts (V)	30 A 208 / 240 V	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz)	30 A 208 / 240 V 50 / 60 Hz	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type	30 A 208 / 240 V 50 / 60 Hz No Plug	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit	30 A 208 / 240 V 50 / 60 Hz No Plug 37" Flexible 3-Wire	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit Energy Source	30 A 208 / 240 V 50 / 60 Hz No Plug 37" Flexible 3-Wire	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit Energy Source DIMENSIONS & WEIGHT	30 A 208 / 240 V 50 / 60 Hz No Plug 37" Flexible 3-Wire Electric 3/8"+3 7/8" x 31" x	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit Energy Source DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in)	30 A 208 / 240 V 50 / 60 Hz No Plug 37" Flexible 3-Wire Electric 3/8"+3 7/8" × 31" × 21 1/4" 3 7/8" × 28 3/4" ×	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit Energy Source DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in)	30 A 208 / 240 V 50 / 60 Hz No Plug 37" Flexible 3-Wire Electric 3/8"+3 7/8" × 31" × 21 1/4" 3 7/8" × 28 3/4" × 19 7/8"	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit Energy Source DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in) Minimum Distance From Counter Front (in)	30 A 208 / 240 V 50 / 60 Hz No Plug 37" Flexible 3-Wire Electric 3/8"+3 7/8" × 31" × 21 1/4" 3 7/8" × 28 3/4" × 19 7/8" 2 1/4"	
Watts (W) Circuit Breaker (A) Volts (V) Frequency (Hz) Plug Type Conduit Energy Source DIMENSIONS & WEIGHT Overall Appliance Dimensions (HxWxD) (in) Required Cutout Size (HxWxD) (in) Minimum Distance From Counter Front (in) Minimum Distance From Rear Wall (in)	30 A 208 / 240 V 50 / 60 Hz No Plug 37 " Flexible 3-Wire Electric 3/8"+3 7/8" × 31" × 21 1/4" 3 7/8" × 28 3/4" × 19 7/8" 2 1/4" 2"	


†To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation

Page 1 of 2 1 / 25

CIT304BB 30-INCH HERITAGE INDUCTION COOKTOP

Thermador.**

MASTERPIECE® COLLECTION BLACK GLASS, FRAMELESS

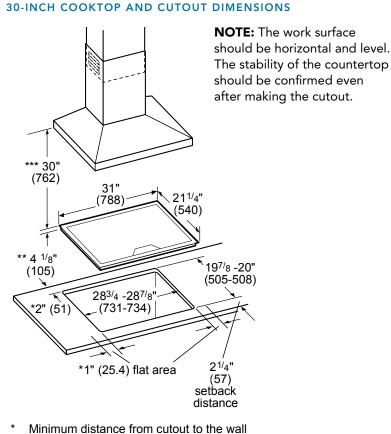


- ** Installed depth includes 1" (26 mm) needed air gap
- *** Minimum distance between the cooktop surface and lower edge of exhaust hood


measurements in inches (mm in brackets)

VENTILATION CLEARANCE REQUIREMENTS

Measurements in inches (mm)



INSTALLATION ABOVE A THERMADOR WALL OVEN



Product Type	A Inches (mm)	B min. Inches (mm)	C max. Inches (mm)
Conventional Oven	28 1/4 (718)	31 1/4 (794) min.	4 3/4 (121)
Steam Oven	25 1/16 (636)	28 1/16 (713)	7 15/16 (202)
Steam Oven with 4" Storage Drawer*	28 1/4 (718)	31 1/4 (794) min.	4 3/4 (121)
Microwave / Speed Oven	19 1/4 (488)	24 (609) min.	12" (306)
Microwave / Speed Oven with Warming drawer*	28 1/4 (718)	31 1/4 (794) min.	4 3/4 (121)

When installing an oven or oven with a drawer in combination with a cooktop, a minimum distance between the cabinet floor and countertop (B) is required. Reference the table for dimensions. Refer to the oven installation guide for all other measurements.

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of delivery. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2024 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 2 of 2 1 / 25