


Ideal Pot Filler Tap with Filtration Coming Late 2021



Specifications

Ideal Pot Filler Tap

Single-lever control
 1/4 turn ceramic disc valve cartridge
 COMFORTFEEL™ lever handle
 Cold water valve, one inlet
 Rough-in part required (sold separately)
 Laminar Ideal Flow®
 Dual swivel spout
 24" projection
 3.2 GPM*
 For use with Water Filtration System (included)
 *Note: May reduce water flow

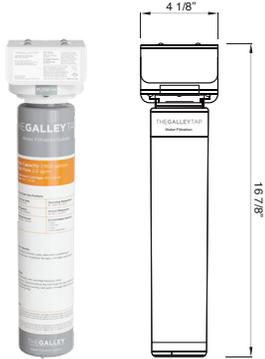

Water Filtration System
(Included)

Water Filtration System

Service flow rate 2.0 gpm
 Rated capacity 7,900 gallons
 Operating pressure 10 - 125 psi
 Operating temperature 35 - 100°F
 Overall dimensions 16 7/8" x 4 1/8"
 Reduces lead, chlorine, cysts and other contaminants
 Quick twist-lock cartridge replacement
 Replacement filter cartridge dimensions 14 1/2" x 3"
 Internal parts never exposed to human handling
 Filtration protects capital equipment from early breakdown
 Installs vertically (allow 2 1/2" clearance)
 Parts Included: Mounting bracket and screws, plastic tubing, push-fit Tee

Construction

Ideal Pot Filler Tap

Solid 316L machined stainless steel construction
 Available in Polished, Matte, PVD Gun Metal Gray™, PVD Satin Black, PVD Brushed Gold, PVD Polished Rose Gold
 Indoor & outdoor
 Limited Lifetime Warranty
 Made in Italy

Water Filtration System

Five Year Warranty
 Made in the USA

Codes/Standards

Ideal Pot Filler Tap

NSF Pending
 UPC Pending

Water Filtration System

IAPMO Certified
 NSF/ANSI 42, 53, 372

