

FISHER & PAYKEL

PRELIMINARY SPECIFICATION GUIDE

STEAM OVEN, 24"



OVERVIEW

With timeless Contemporary styling, the compact Combination Steam Oven is designed to fit seamlessly into any kitchen. It features 23 functions, including steam-only, convection-only, or a combination of both. Reduce the need for oils and fats with six standalone steam functions, perfect for creating flavourful and healthy restaurant-quality meals at home. Beautiful to use, the large 5" touchscreen interface has simple and intuitive guided cooking, helping to ensure perfect results.

MODELS

Combination Steam Oven, 24", 23 Function

1.94 cu ft, Stainless steel, Touchscreen, Dial
OS24NDTDX1

SERIES & STYLE

Series 9
Contemporary

ACCESSORIES

- ① Roasting dish
- ① Step down wire shelf
- ② Full extension sliding shelves
- ③ Large perforated dish
- ② Small perforated dish

FEATURES

- ① Contemporary style, designed to fit flush with cabinetry
- ② 1.94 cu ft total capacity
- ③ Intuitive, large 5" touchscreen display with illuminated dial
- ④ 23 oven functions, including six steam-only functions
- ⑤ Wireless Temperature Sensor precisely monitors cooking in real time*
- ⑥ Guided touchscreen cooking makes it simple to cook by food, function or recipe
- ⑦ Moisture control and even heat distribution thanks to ActiveVent and AeroTech™ technology
- ⑧ Motorised control panel reveals large 50.7 fl oz water tank
- ⑨ Wi-Fi/Connected capability through the SmartHQ™ app*

*Selected markets and models

- ⑦ Large unperforated dish
- ⑧ Baking tray
- ⑨ Wireless Temperature Sensor*
- ⑩ Descale solution (2 sachets)

*Selected markets and models

FISHER & PAYKEL


PRELIMINARY SPECIFICATION GUIDE

STEAM OVEN, 24"

SPECIFICATIONS

Model No.	OS24NDTDX1
Dimensions	H 18" (458mm) x W 23 7/16" (596mm) x D 22 1/4" (565mm)
Total capacity	1.94 ft cu (55L)
Weight	88 lbs (40kg) unpackaged 115 lbs (52kg) packaged
Electrical	
Supply	208-240V, 60Hz
Service	16.6-19.4 amp circuit


PRODUCT DIMENSIONS

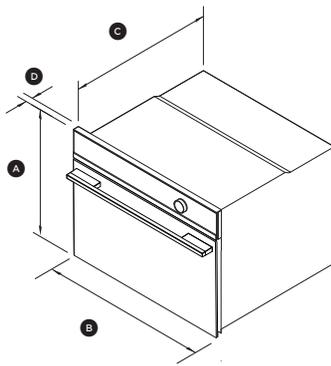

ISO VIEW

		in	mm
(A)	Overall height	18	458
(B)	Overall width	23 7/16	596
(C)	Depth of chassis	21 7/16	545
(D)	Depth from front of chassis to front of oven door (excl.dial & handle)	13/16	20
	Depth of oven door when fully open (measured from front of control panel)	12 5/8	320

CAVITY DIMENSIONS

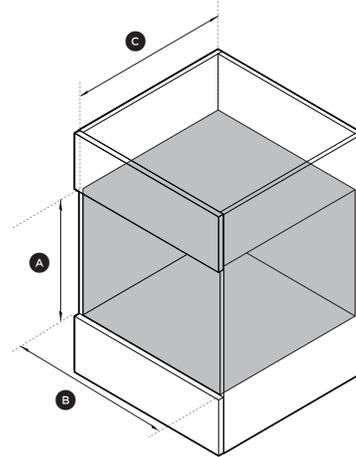

ISO VIEW

		in	mm
(A)	Minimum inside height of cavity	17 5/16	440
(B)	Minimum inside width of cavity	21 1/16	560
(C)	Minimum inside depth of cavity	21 11/16	550