


MONOGRAM 27" STAINLESS STEEL WARMING DRAWER

ZKW700SSNSS

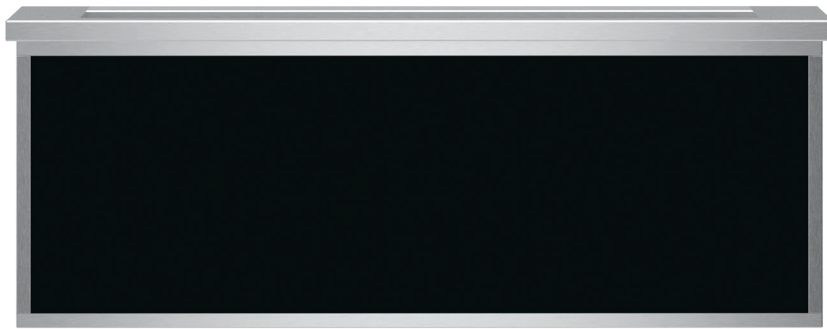

THE MONOGRAM MINIMALIST COLLECTION

Streamlined design and precisely machined metals create a contemporary yet functional aesthetic

1.6 CU. FT. CAPACITY

"ON" INDICATOR LIGHT

INFINITE SETTING TEMPERATURE CONTROL

VARIABLE HUMIDITY CONTROL


Crisp to moist

REMOVABLE HALF RACK

STAINLESS STEEL DRAWER FRONT
WITH MINIMAL HANDLE

FULL EXTENSION DRAWER ON BALL
BEARING GLIDES

ON/OFF ROCKER SWITCH

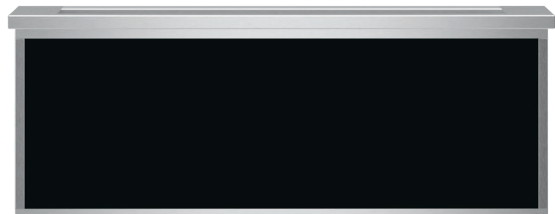

SPECIFICATIONS

| | |
|-------------------------|-----------------------|
| Overall Width | 26 3/4" (68.0 cm) |
| Overall Height | 10 1/2" (26.7 cm) |
| Overall Depth | 23 1/4" (59.0 cm) |
| Drawer Capacity | 1.67 cu. ft. (47.3 l) |
| Cut-out Width | 25 1/2" (64.8 cm) |
| Cut-out Height | 9 1/4" (23.5 cm) |
| Cut-out Depth | 23 1/2" (59.7 cm) |
| Power Cord Length | 56" (142.2 cm) |
| Electrical Rating | 450W @ 120V/60Hz |
| Total Amps | 15 Amps |
| Net Weight | 53 lbs. (23.6 kg) |
| Approx. Shipping Weight | 59 lbs. (26.8 kg) |

ATTENTION ELECTRICIAN:


This appliance is supplied with a 56" (142.2 cm) long electrical cord equipped with a 3-prong (grounding) plug that mates to a standard 3-prong grounding wall outlet.

The electrical power cord is located on the right side of the warming drawer. Locate the wall outlet within easy reach of the electrical cord in an adjacent cabinet, within 42" (106.7 cm) of the right side or 16" (40.6 cm) from the left side of the cut-out. A recessed outlet can be installed on the right side of the cut-out, 7" (17.8 cm) max. from the rear of the cabinet.


DO NOT USE AN EXTENSION CORD WITH THIS PRODUCT.

For more details refer to the installation instructions for this product.


OVERALL DIMENSIONS

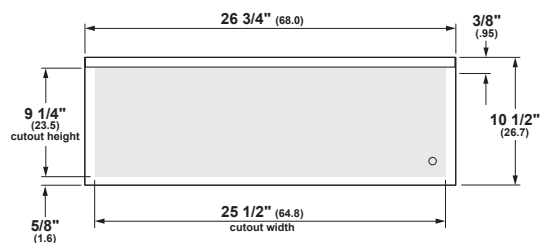

FRONT VIEW (SHOWING CUTOUT OVERLAP)

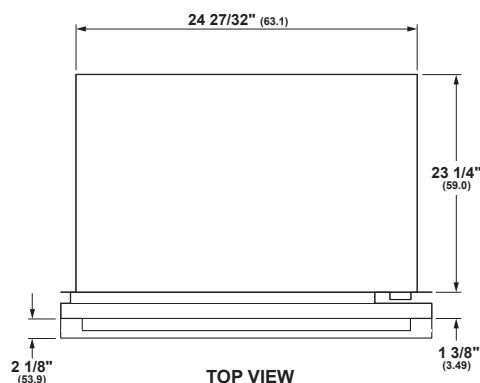


TOP VIEW

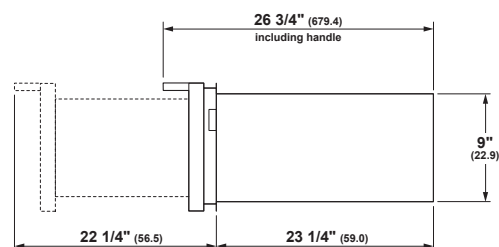

SIDE VIEW

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

INSTALLATION BELOW SINGLE OR DOUBLE WALL OVEN

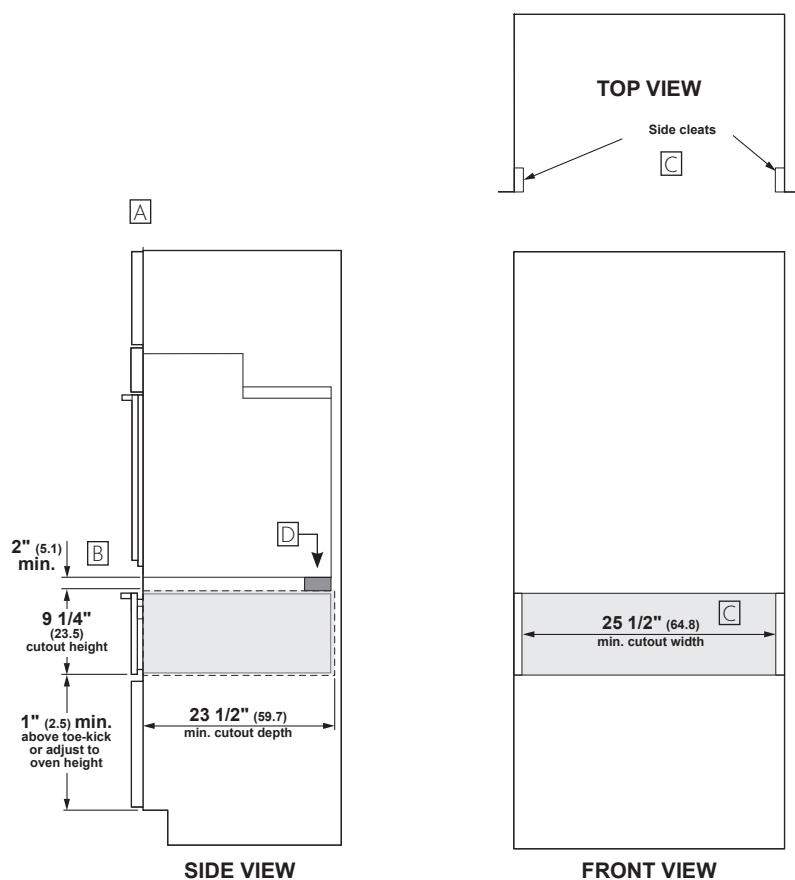


HELPFUL TIPS


- [A] Warming drawers are approved for installation below only certain specified wall oven and cooktop models. See the label attached to the top of the warming drawer for approved combinations.
- [B] Additional clearance between cut-outs may be required. Check to be sure that oven supports above the warming drawer location do not obstruct the required interior 23-1/2" depth and 9-1/4" height.
- [C] If you are installing in frameless cabinets, it may be necessary to install 1/2" wide cleats to accept drawer mounting screws. See drawer for mounting screw locations.
- [D] Install a 2"x2" or 2"x4" Anti-tip block against rear wall, 9" from floor of cutout to bottom of block. The anti-tip block must be installed to prevent the drawer from tipping forward when opened and loaded. Failure to add the anti-tip block could result in personal injury.
- [E] When installing the warming drawer below a cooktop, a solid barrier must be installed at least 1" from the lowest point of the bottom of cooktop burner box to the top of the cut-out. Use any solid material such as 1/4" thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer.

For more details refer to the installation instructions for this product.


INSTALLATION BELOW COOKTOP

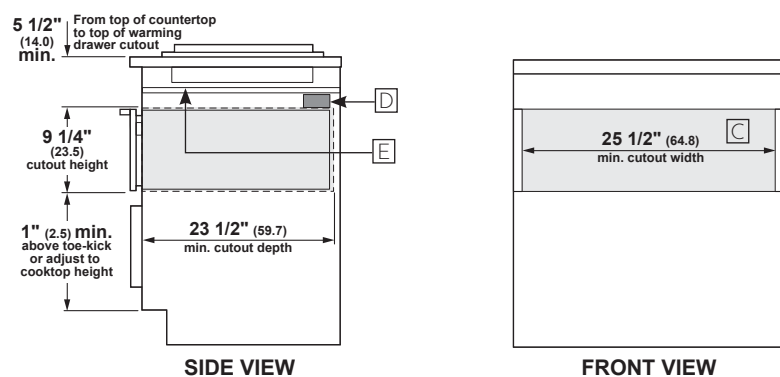


INSTALLATION BELOW A CABINET DRAWER

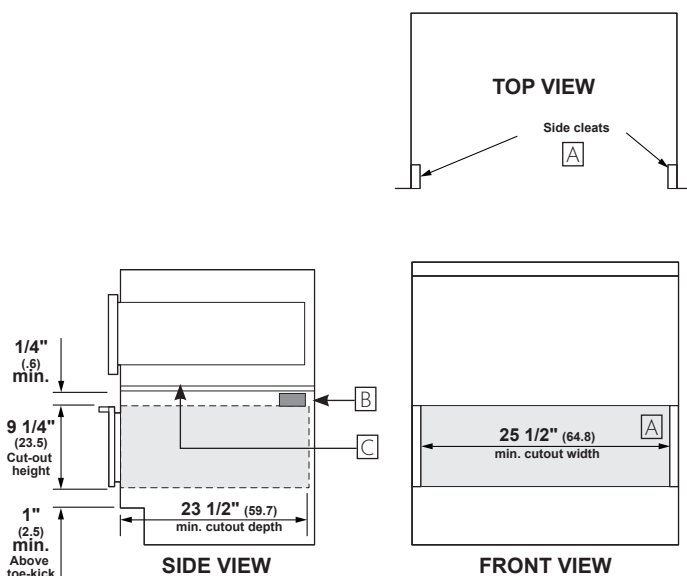


SIDE BY SIDE INSTALLATION



PROVIDING CABINET SUPPORT



INSTALLING ANTI-TIP BLOCKS

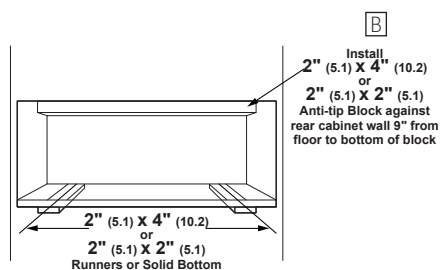

HELPFUL TIPS

- [A] If you are installing in frameless cabinets, it may be necessary to install 1/2" wide cleats to accept drawer mounting screws. See drawer for mounting screw locations.
- [B] Install a 2"x2" or 2"x4" anti-tip block against rear wall, 9" from floor of cutout to bottom of block. The anti-tip block must be installed to prevent the drawer from tipping forward when opened and loaded. Failure to add the anti-tip block could result in personal injury.
- [C] When installing the warming drawer below a cabinet drawer, a solid barrier must be installed at least above the warming drawer to block access. Use any solid material such as 1/4" thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer. Observe the 5" min. above the floor or 1" min. above the toe kick installation height.
- [D] When installing two warming drawers side by side, install them in separate cut-outs and allow a 2" min. gap between each cut-out.
- [E] The warming drawer may be supported by either a solid bottom or 2"x2" or 2"x4" runners. The support must be level and rigidly mounted, flush with the bottom edge of the cut-out (there is no way to level the drawer once it has been installed, so make sure that the supports are level). The floor or runners must be capable of supporting at least 150 lbs.

For more details refer to the installation instructions for this product.