PINTR146SS
46" INSERT HOOD

YALE APPLIANCE



FEATURES & BENEFITS

Quiet system - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.

Grease Collecting Baffle Filters - Intended for high airflow cooking. Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.

Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.

Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.

Superior performance - High performance ventilation with blowers ranging from 600 to1200 CFM.

AFC

Air Flow Control - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.

*This product is intended for both Indoor and Outdoor use. Models are UL Damp Location Approved for outdoor installation / use under covered patios or lanai.



GENERAL FEATURES	
Standard Operating Mode	Ducted
Recirculating	Yes, Optional, *Accessories needed*
Maximum CFM (Blower)	1200 CFM
CFM Reduction Kit	Included
Sones	1.7 - 8.5 Sones
Number of Speed Settings	4 Speed
Motor Location	Integrated Motor in Hood Body
Number of Lights	2 LED Lights
Light Lumens	540 Lumens
Light Color	3000 Kelvin
Total Power of the Lamps	6.5 Watts
Damper Included	Yes
Grease Filter Material	Stainless Steel
Grease Filter Type	(2) Grease Collecting Stainless Steel Baffle

TECHNICAL DETAILS	
Watts	913W
Current	20A
Volts	120V
Frequency	60HZ
Plug Type	Junction Box

WEIGHTS & DIMENSIONS	
Overall Dimensions (WxDxH)	46 3/8"W x 18"D x 11 7/8"H
Minimum Mounting Height Above Gas / Electric Cooking Surface	30" Gas 24" Electric
Top Air Duct Size	8" Round
Rear Air Duct Size	NA

OPTIONAL ACCESSORIES	
Inline Blower Shell Kit	#ACC0179549 (6", 8" or 10" duct size compatible)
External Blower Shell Kit	#ACC0179547 (8" or 10" duct size compatible, for use with 1200 CFM models)
Transition Reducer Kit	#ACC0185271 (10" round down to 8" round - attaches to 10" round transition supplied w/ hood)

RECIRCULATING ACCESORIES REQUIRED	
Carbon filters	#ACC0192765 (Contains 4 round carbon filters)
Metal Deflector	#ACC0192763 (Contains one round metal grate/deflector for 10" or 8" ducting)

WARRANTY	
Limited Warranty Parts & Labor	Two (2) years parts & in-home labor


ADA COMPLIANT

PINTR146SS
46" INSERT HOOD


YALE APPLIANCE

HOOD DIMENSIONS


TOP VIEW

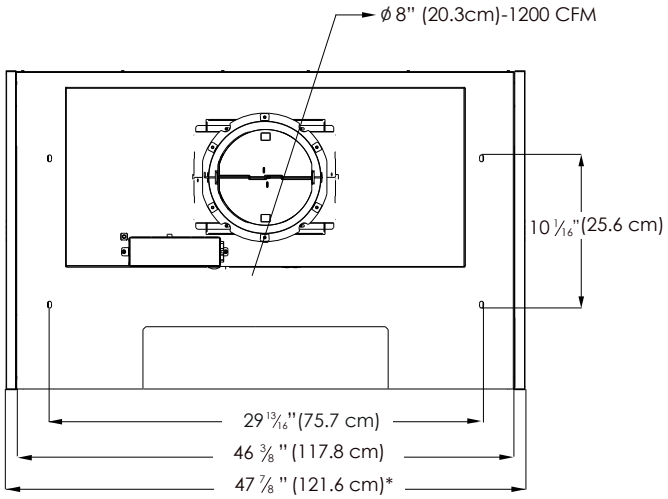

SIDE VIEW

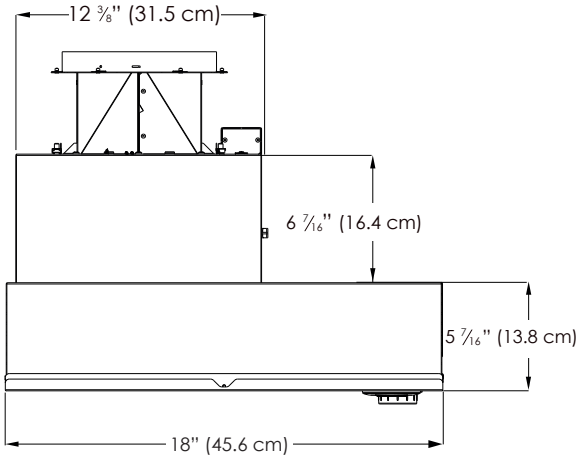

FRONT VIEW

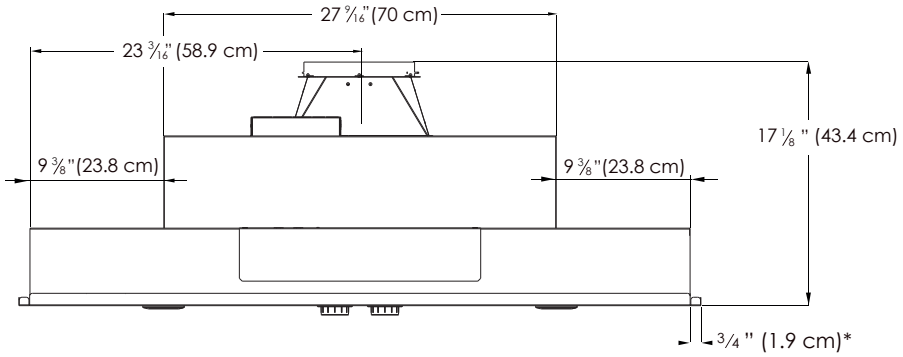


***The 3/4" stainless steel spacers are optional and recommended for cabinets deeper than 12".**

CUT OUT DIMENSIONS

OVERALL CUTOUT

The dimensions shown below correspond to the required cutout at the bottom of the cabinet.

BOTTOM CUTOUT
(RED AREA)

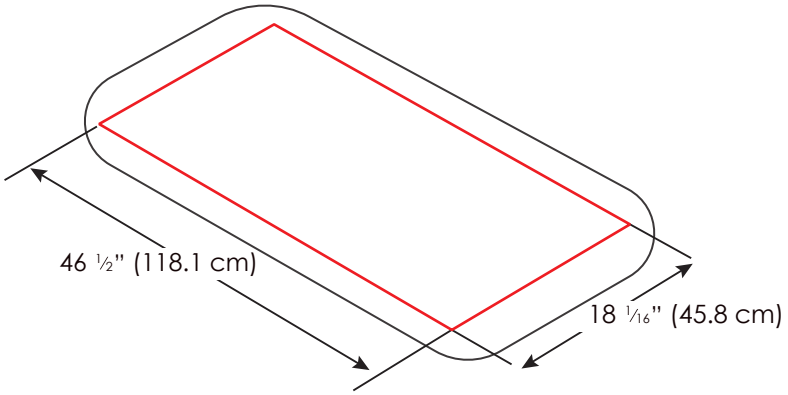

Specifications are for planning purposes only. Refer to installation instructions and consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product. Specifications are correct at time of printing. Yale Appliance reserves the right to change product specifications or design without notice.