



CSOP3050PM/S/P

FEATURES

- The elegant, modern aesthetic pairs perfectly with a full suite of similarly styled Sub-Zero, Wolf, and Cove appliances
- Full-color touchscreen simplifies use
- The door opens and closes quietly for an elevated experience
- Save up to 50 personalized recipe presets for quick access to your favorite go-to meals
- Cooking modes include Steam, Convection, Broil, Slow Roast
- Oven features a 1750-watt recessed broil element with multiple settings
- 2.4 cubic-foot oven cavity allows multiple dishes to be placed side by side at once
- 1889-watt dual convection system ensures even, multi-rack baking and consistent results
- Three full-extension rack positions and one standard position allow easy access and increased cooking flexibility
- Plumbed water supply provides continuous steam cooking
- The temperature probe alerts you when your dish has reached the desired temperature

ACCESSORIES

- Broiler Rack
- Descaling Solution
- Enameled Broiler Pan
- Perforated Pan - 12 3/4" x 1 1/2" x 7"
- Perforated Pan - 24 3/4" x 1 1/8" x 14 5/8"
- Solid Pan - 12 3/4" x 1 1/2" x 7"
- Solid Pan - 24 3/4" x 1 1/8" x 14 5/8"
- Standard Oven Rack
- Temperature Probe
- Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](https://subzero-wolf.com/locator).





PRODUCT SPECIFICATIONS

|                          |                                                                |
|--------------------------|----------------------------------------------------------------|
| Model                    | CSOP3050PM/S/P                                                 |
| Dimensions               | 29 7/8"W x 17 7/8"H x 22 1/2"D                                 |
| Oven Interior Dimensions | 25 1/4"W x 10 3/4"H x 15 1/8"D                                 |
| Overall Capacity         | 2.4 cu. ft.                                                    |
| Usable Capacity          | 1.8 cu. ft.                                                    |
| Door Clearance           | 14 3/16"                                                       |
| Weight                   | 91 lbs                                                         |
| Electrical Supply        | 240/208 VAC, 60 Hz                                             |
| Electrical Service       | 20 amp dedicated circuit                                       |
| Drain Line TestSpec      | 10' (3 m) corrugated drain tubing                              |
| Plumbing Supply          | 6.5' (2 m) braided tubing with 3/8" female compression fitting |
| Plumbing Pressure        | 15–145 psi                                                     |
| Conduit Length           | 4 Feet                                                         |

ELECTRICAL




PLUMBING




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

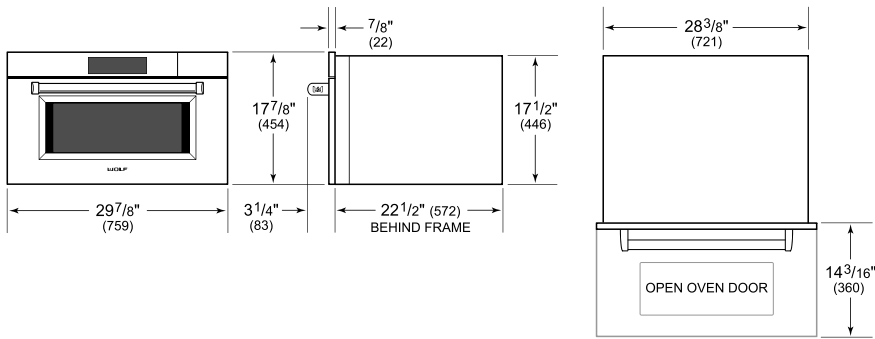

FLUSH INSTALLATION

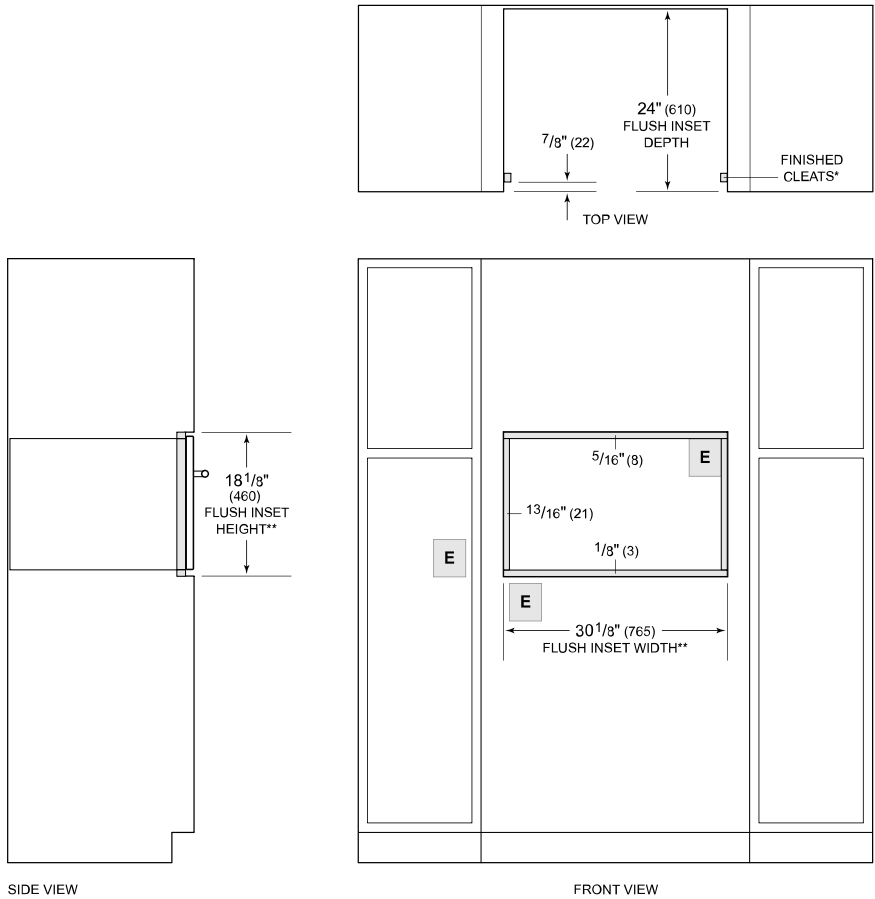

\*Will be visible and should be finished to match cabinetry.  
\*\*Dimension provides minimum reveals.  
NOTE: Location of electrical supply within opening may require additional cabinet depth.