





THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT WWW.OSBURN-MFG.COM


APPLIANCE DIMENSIONS

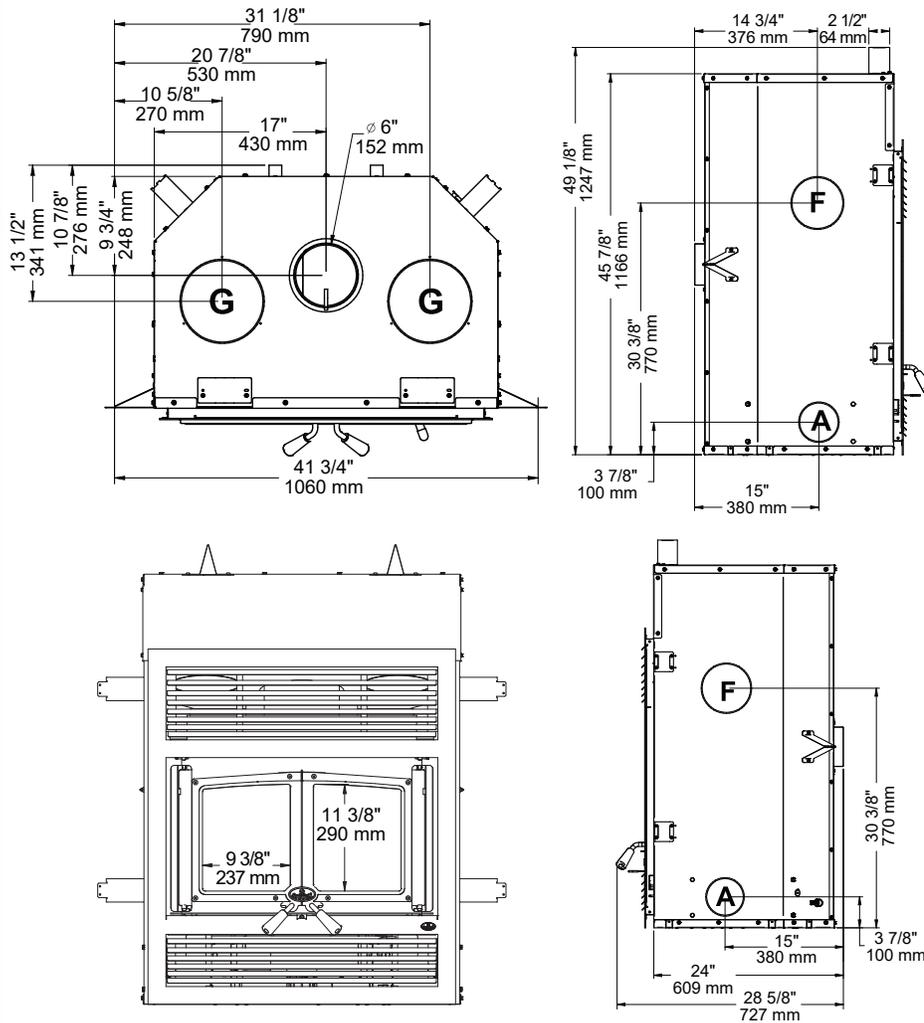

FRAMING DIMENSIONS

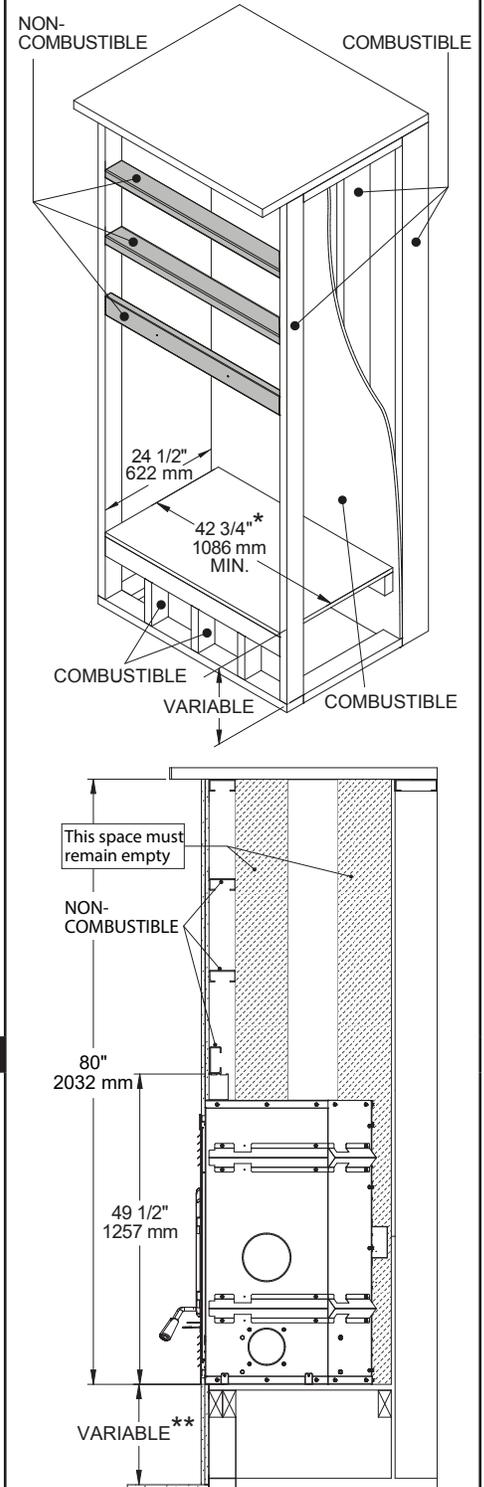

CORNER INSTALLATION

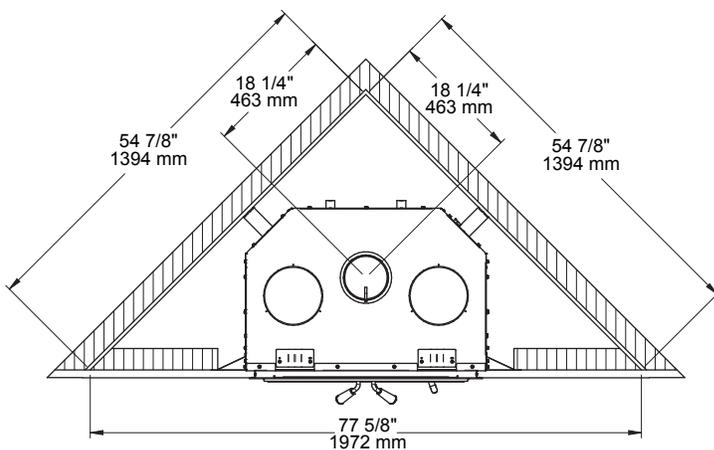

LEGEND

Combustible material allowed in this area



Non-combustible material only in this area



\* Where applicable, add 12" for fresh air pipe and/or 18" for forced air pipe to the width of the chase. When drywall panels or any other finishing material inside the chase around the fireplace is to be used, add its thickness to the measurement.

\*\* For height equal or less than 4", see hearth extension section on reverse.



THIS QUICK REFERENCE PRODUCT SHEET IS NOT COMPLETE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. ALWAYS REFER TO OWNER'S MANUAL ACCOMPANYING THE PRODUCT TO AVOID RISK OF FIRE AND INJURIES. ADDITIONAL INFORMATION CAN BE FOUND IN THE OWNER'S MANUAL ONLINE AT [WWW.OSBURN-MFG.COM](http://WWW.OSBURN-MFG.COM)

### FACING MATERIAL

Le matériaux non-combustible doit couvrir la façade du foyer jusqu'à une hauteur minimale de 70" (1777 mm).

### SHELF, MANTLE, AND WALL PROJECTION

	48" (1,21 m)	50" (1,27 m)	52" (1,32 m)	54" (1,37 m)
<b>B</b>	48" (1,21 m)	50" (1,27 m)	52" (1,32 m)	54" (1,37 m)
<b>C</b>	6" (152 mm)	8" (203 mm)	10" (254 mm)	12" (305 mm)

### HEARTH EXTENSION CONSTRUCTION AND DIMENSIONS

#### OPTION #1

Directly on the floor:  
R-value required: 1.00 or greater

#### OPTION #2

Raise base of 4" or less:  
R-value required: 1.00 or greater

#### LEGEND

<p><b>Combustible material allowed in these areas</b></p>	<p><b>Non-combustible material only in this area</b></p>
<p><b>Non-combustible floor protection</b></p>	<p><b>Non-combustible floor covering</b></p>

#### OPTION #3

Raise base of more than 4":  
No R-value required

Floor covering  
Floor protection