

PRODUCT SPECIFICATIONS In-Line Blower / Ventilator

Professional Series Models:


Model	Weight	Amps	CFM
PSX006XL	12lbs	1.26	392
PSD008XL	19 lbs	2.99	836
PSD010XL	21 lbs	4.84	1266




Description

Featuring a galvanized steel housing with a powdercoat finish, Trade-Wind® In-Line Blowers are designed to be installed "in-line" with a Trade-Wind® or comparable wood hood liner. These fans are specifically designed to provide efficient, high velocity air movement by combining the best elements of high flow axial designs with the power of a centrifugal squirrel cage blower. Direct Drive motor construction eliminates the need for continuous belt alignment, tension adjustments and maintenance.

Model	Α	В	С	D
PSX006XL	6"	13 1⁄4"	6 ½"	8 1⁄4"
PSD008XL	8"	12 ½"	7"	15 ½"
PSD010XL	10"	14"	8"	15"




Typical Installation



Installation Considerations

Trade-Wind[®] In-Line Blowers (K), Duct Silencers (I), Dampers (E) and Fast Clamps (H) can be installed in many configurations. Although the In-Line Blower and Duct Silencer in this illustration are in a horizontal position, they can be installed at any angle. *Attic installations are highly recommended.*

To ensure the overall ventilation system operates as designed, please carefully review the Installation Instructions included with the individual products. These guidelines are the manufacturer's suggestions. Always observe local, municipal and state building codes.

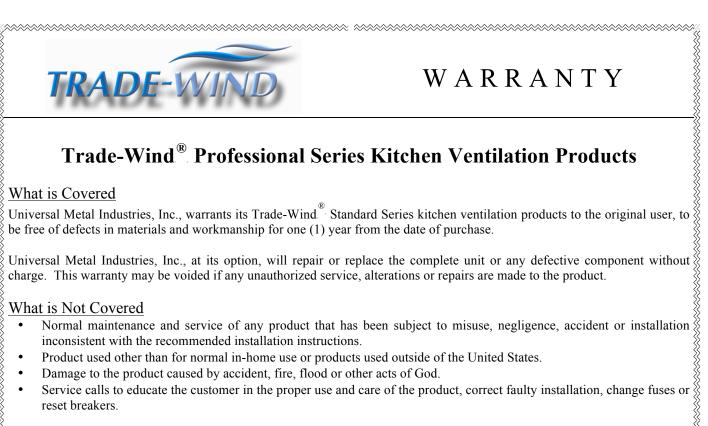

- reset breakers.

Universal Metal Industries, Inc. disclaims and excludes any liability for implied warranties or for incidental or consequential damages wherever permitted by law. There are no implied warranties of merchantability or fitness for a particular use or purpose. This warranty gives you specific legal rights and you may also have other rights, which vary from state to state.

For Service

If you need service, contact Customer Service at the address or phone number below. Provide the model number, part identification and details of the problem. Proof of purchase must be provided.

Warranty Rev. 02/25/04

Universal Metal Industries, Inc. has a policy of continuous improvements and reserves the right to modify (at any time and without notice) any or all of its products, features, designs, components and specifications. For exact dimensions, see the Installation Instructions included with each product. Some features may be slightly different than shown on product literature



For more information, please contact your dealer or Trade-Wind® Representative

800 West Grant Street, Phoenix, AZ 85007

800 875-3654 Phone 800 809-0995 Fax 602 251-3654 Phone 602 251-3889 Fax www.umiphx.com www.trade-windonline.com

