

# 24" ADA-COMPLIANT SERIES BEVERAGE CENTER

Perlick®

HA24BB-3 24" INDOOR MODEL



Glass Door Model



Solid Door Model

## GENERAL ADA-COMPLIANT SERIES FEATURES



- 32" height with leveling legs
- **Industry Exclusive** front-vented RAPIDcool forced-air refrigeration system provides best-in-class cooling performance
- Commercial-grade stainless steel interior and black vinyl clad exterior
- All models available with stainless steel or panel ready door. Panel ready doors come ready to accept customer-supplied overlay and handle
- **Industry Exclusive** full extension refrigerator and wine shelves provide easy access for stocking and retrieving product. Shelves glide smoothly in and out of cabinet on stainless steel ball bearing glides
- Zero-clearance hinging allows for abutment with surrounding cabinetry
- Interior lighting
- Low E, double pane UV-resistant glass provides exceptional insulation and protection from light
- Comprehensive Full Three Year Warranty plus additional three years on sealed system

## HA24BB FEATURES

- Available with stainless steel solid door, panel ready solid door, stainless steel glass door or panel ready glass door
- Includes two (2) full-extension wine shelves to accommodate eight (8) bottles each and one (1) full-extension refrigerator shelf
- Beverage Center temperature 33° - 48°F

## ACCESSORIES

|           |                                                  |
|-----------|--------------------------------------------------|
| (L)       | Factory Installed Lock                           |
| 67164     | 6" Toe Kick Kit (includes riser) for HA24 models |
| 66736     | Caster Kit for HP24/HC24/HA24 models             |
| RS-24-24D | Divider Shelf for HP24/HC24/HA24 models          |

Perlick accessories are available for purchase through an authorized Perlick dealer. For a full list of accessories and to find a dealer near you, visit [perlick.com/residential](http://perlick.com/residential)

FORM NO. Z2524  
REV. A-09/07/2018

## PRODUCT SPECIFICATIONS

|                      |                                |
|----------------------|--------------------------------|
| Product Width        | 23-7/8" (606 mm)               |
| Product Height       | 32" (813 mm)                   |
| Product Depth        | 24" (610 mm)                   |
| Opening Width        | 24" (610 mm)                   |
| Opening Height       | 32-1/4" (819 mm)               |
| Opening Depth**      | 24-7/8" (632 mm)               |
| Refrigerated Volume  | 4.8 cu. ft total               |
| Door Swing Clearance | 25" (635 mm)                   |
| Electrical           | 115V, 60Hz., 1 Phase, 2.3 amps |
| Compressor           | 525 BTU, standard              |
| Plumbing             | None Required                  |
| Annual Energy Usage  | 295 kWh                        |
| Shipping Weight      | 181 lbs (82.27 kg)             |


\*\* Includes 7/8" plug clearance. To achieve 24" depth, you must recess the plug into the wall directly behind the unit.

## INDOOR MODELS

|               |                                        |
|---------------|----------------------------------------|
| HA24BB-3-1L*  | Stainless steel solid door, hinge left |
| HA24BB-3-2L*† | Panel ready solid door, hinge left     |
| HA24BB-3-3L*  | Stainless steel glass door, hinge left |
| HA24BB-3-4L*† | Panel ready glass door, hinge left     |

\* Also available hinge right (R)

† This unit comes ready to accept customer-provided overlay panel and handle

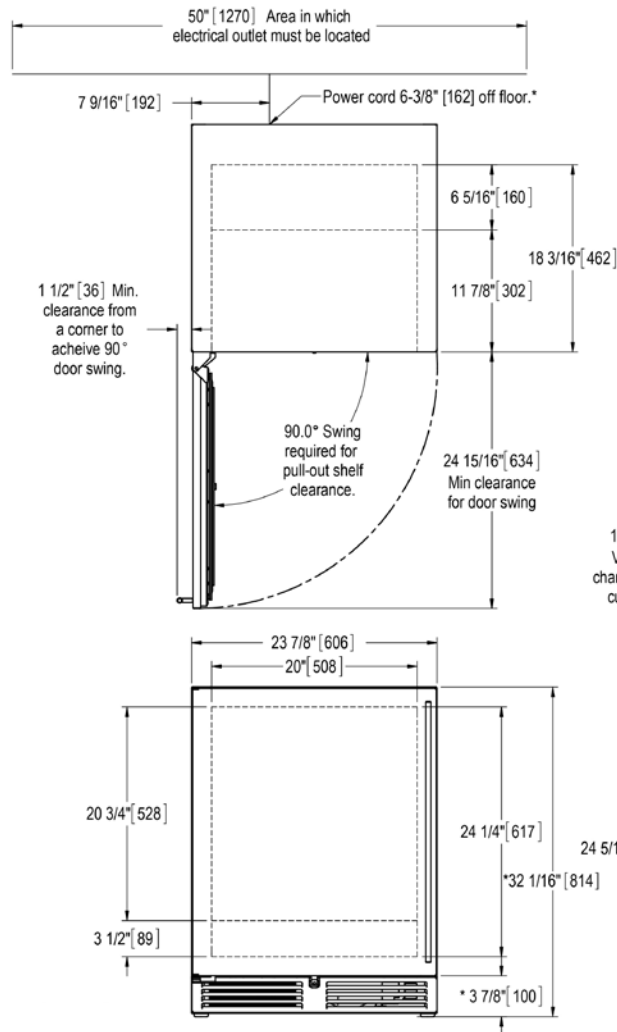

California Prop 65 Notice:

**WARNING:** The materials used in this product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

FORM NO. Z2524  
REV. A-09/07/2018