WALL OVENS
SPECIALTY OVENS
GAS RANGETOPS & COOKTOPS
INDUCTION & ELECTRIC COOKTOPS

DESIGN GUIDE



BUILT-IN COOKING DESIGN GUIDE

Bertazzoni appliances are designed to work together and create harmony in the kitchen.

The products in our built-in cooking program can be combined with numerous installation options to create the ideal setup that suits the kitchen layout and cooking style of the homeowner.
Versatility is key, with a choice of technologies and designs that work together seamlessly.

This guide contains up-to-date technical specifications and dimensions necessary to prepare the installation of Bertazzoni built-in cooking products in a kitchen.

All these details are also available online at bertazzoni.com.

INDEX

INTRODUCTION	**3**
WALL OVENS	**4**
30” Electric Convection Single Ovens	6
30” Electric Convection Double Ovens	11
24” Electric Convection Oven	15
SPECIALTY OVENS	**19**
30” Convection Speed Ovens	21
30” Convection Steam Ovens	26
30” Warming Drawer	31
30” Microwave Oven	34
24” Convection Speed Ovens	38
24” Microwave Drawer	43
GAS RANGETOPS & COOKTOPS	**46**
48” Rangetops	48
36” Rangetops	51
36” Drop-in Cooktops 6 burners	54
36” Drop-in Cooktops 5 burners	57
30” Drop-in Cooktops	60
36” Gas Cooktop Front Control	63
30” Gas Cooktop Front Control	66
24” Gas Cooktop Front Control	69
INDUCTION & ELECTRIC COOKTOPS	**72**
36” Induction Cooktop	74
30” Induction Cooktop	77
30” Electric Ceramic Cooktop	80
24” Electric Ceramic Cooktop	83
MULTIPLE INSTALLATIONS	**86**
30” Oven - Wall Configurations	88
24” Oven - Wall Configurations	100
30” Oven and Cooktop - Undercounter Configurations	104
24” Oven and Cooktop - Undercounter Configurations	123

WALL OVENS

Built-in ovens offer an excellent alternative – or even complementary choice – to freestanding range, offering simple elegance. For some, the ability to fit an oven easily into a compact space makes built-in ovens their first choice. For others it is the attraction of flexible design with the option to install the ovens on top of each other or side-by-side, at eye-level or undercounter.

All Bertazzoni built-in ovens can be installed proud or perfectly flush to align with matching convection steam, speed and microwave ovens as well as warming drawers.


30” Electric Convection
Single Ovens



24” Electric Convection
Single Ovens



30” Electric Convection
Double Ovens




UPPER OVEN
OFF
CLEAN
BAKE
BROIL
CONV BAKE
CONV BROIL
CONV
WARM
PIZZA
SETTINGS
ASSISTANT
MORE
OK
DOWN
UP
11:50
BACK
LIGHT
TIME
PROBE
LOWER OVEN
OFF
CLEAN
BAKE
BROIL
CONV BAKE
CONV BROIL
CONV
WARM
PIZZA
SETTINGS
ASSISTANT
SPECIALS
OK
DOWN
UP


30” Electric Convection Single Ovens

Dimensions


PROF30FSEXT
PROF30FSEXV

MAST30FSEXT
MAST30FSEXV


SIDE VIEW

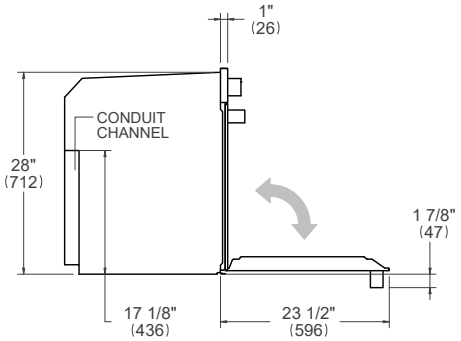

FRONT VIEW



TOP VIEW

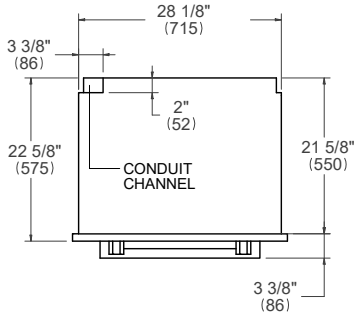

30” Electric Convection Single Ovens
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C).
Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	275lb (125kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW

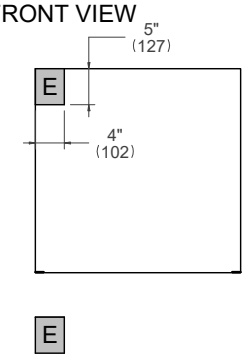

A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120/240 V 120/208 V	60 Hz 60 Hz	5500 W 4400 W
Service	30 Amp dedicated circuit		
Power Connection	METAL CONDUIT – 59” cord		

For detailed installation specifications consult the installation manual.


30” Electric Convection Single Ovens

Proud installation


TOP VIEW

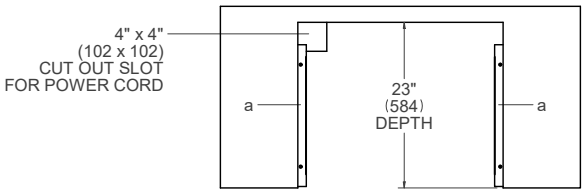

SIDE VIEW

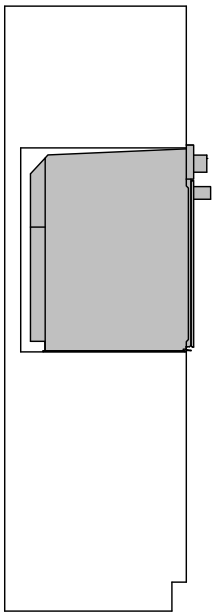

FRONT VIEW

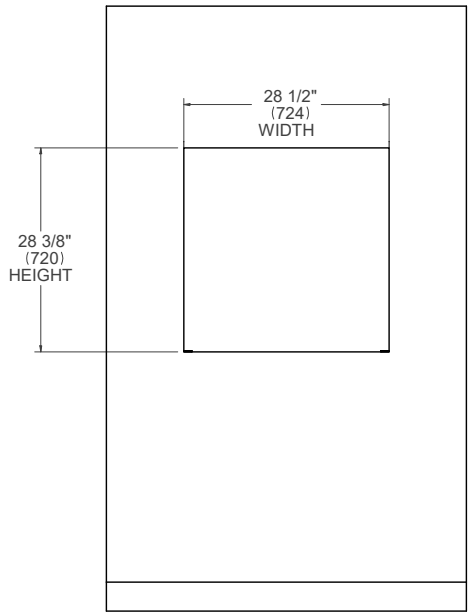


(a) Spacers - Included with appliance


30” Electric Convection Single Ovens

Flush installation non vented


TOP VIEW

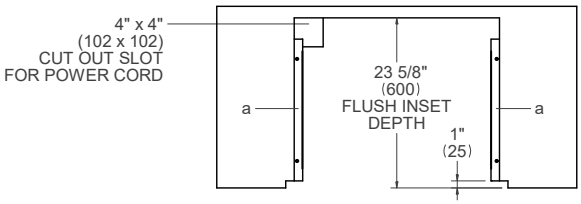

SIDE VIEW

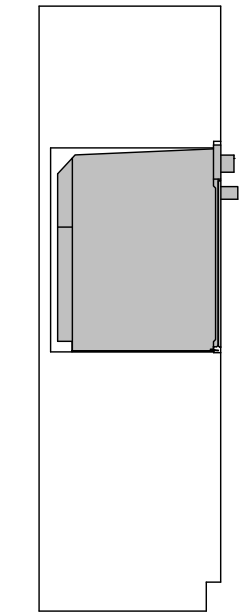

FRONT VIEW

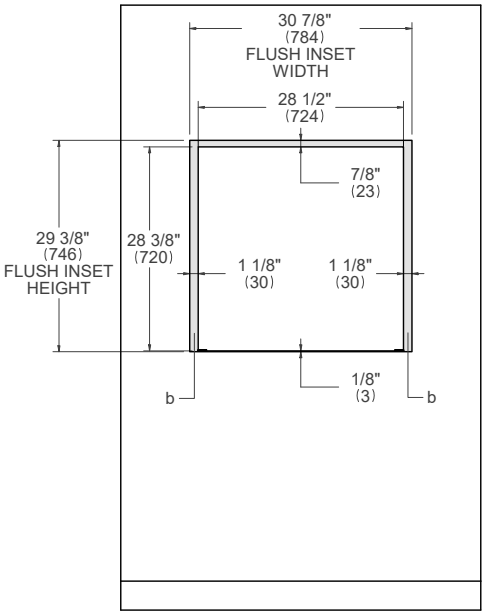


(a) Spacers - Included with appliance

(b) Visible Area - Match finish to outside cabinet panels


30” Electric Convection Single Ovens

Flush installation vented


TOP VIEW

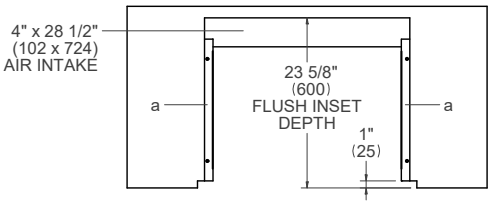

SIDE VIEW

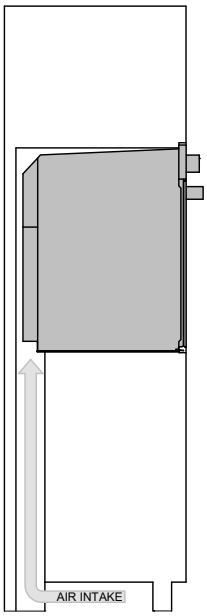

FRONT VIEW

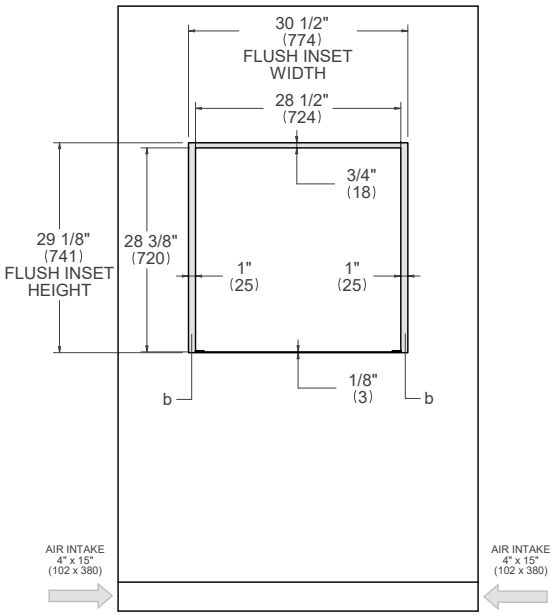

(a) Spacers - Included with appliance

(b) Visible Area - Match finish to outside cabinet panels


30” Electric Convection Double Ovens

Dimensions


PROF30FDEXT
PROF30FDEXV

MAST30FDEXT
MAST30FDEXV


SIDE VIEW

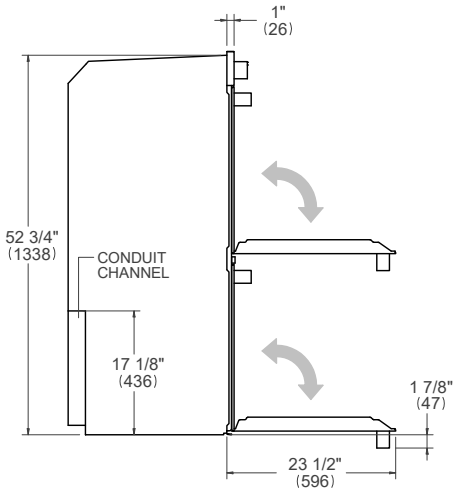

FRONT VIEW

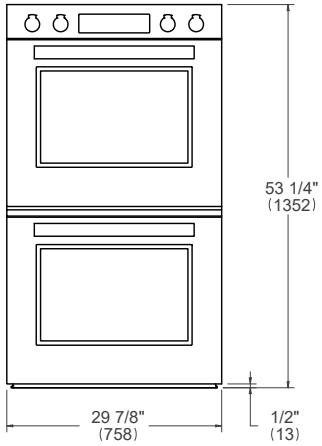

TOP VIEW



30” Electric Convection Double Ovens
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	485lb (220kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW

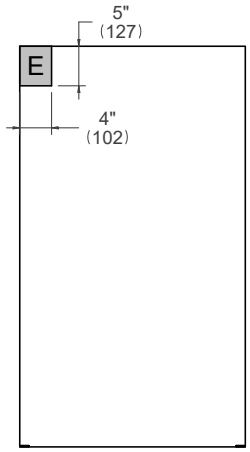

E

A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120/240 V 120/208 V	60 Hz 60 Hz	11000 W 8800 W
Service	50 Amp dedicated circuit		
Power Connection	METAL CONDUIT – 59” cord		

For detailed installation specifications consult the installation manual.


30” Electric Convection Double Ovens

Proud installation


TOP VIEW

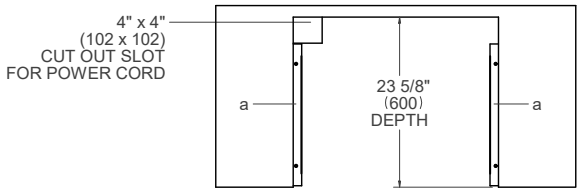

SIDE VIEW

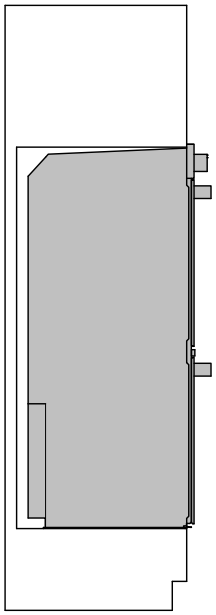

FRONT VIEW

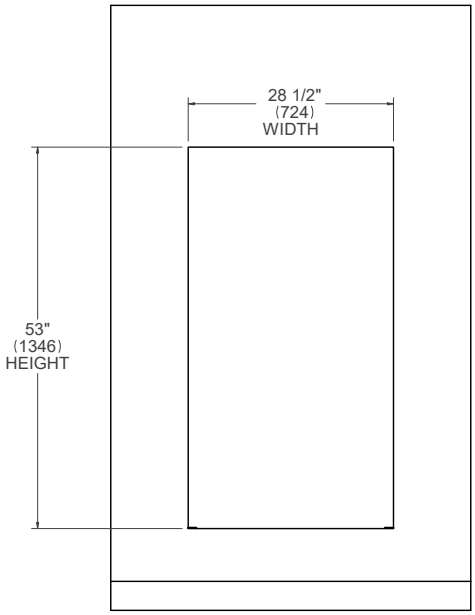


(a) Spacers - Included with appliance


30” Electric Convection Double Ovens

Flush installation vented


TOP VIEW

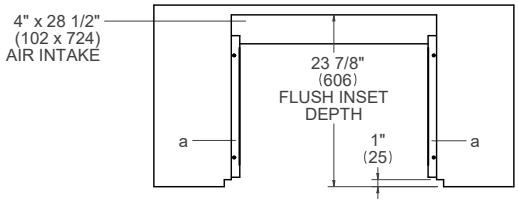

SIDE VIEW

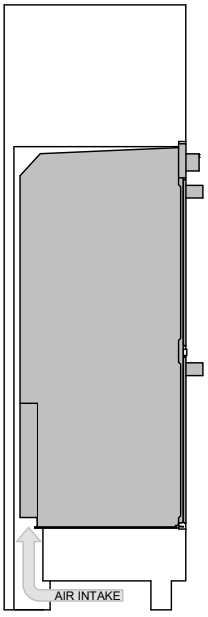

FRONT VIEW

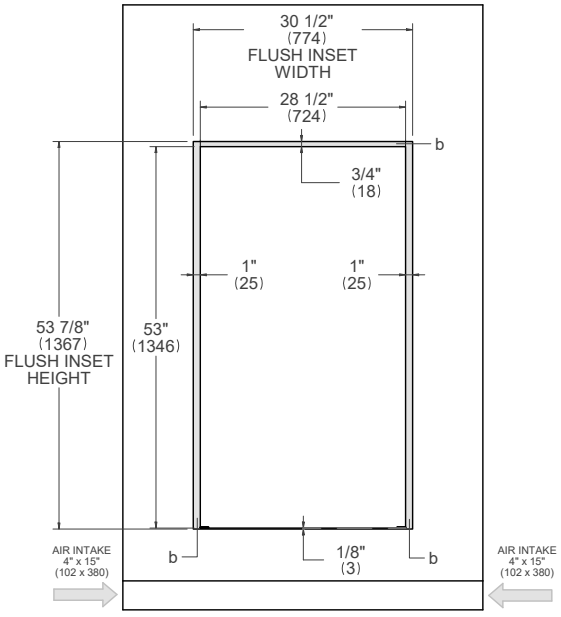

(a) Spacers - Included with appliance


(b) Visible Area - Match finish to outside cabinet panels

24” Electric Convection Single Ovens


Dimensions

PROF24FSEXV


SIDE VIEW

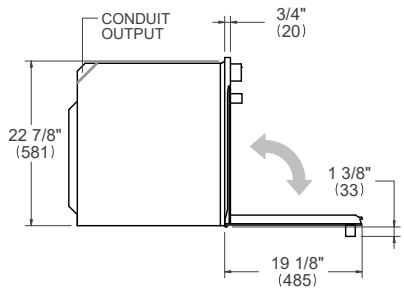

FRONT VIEW



TOP VIEW

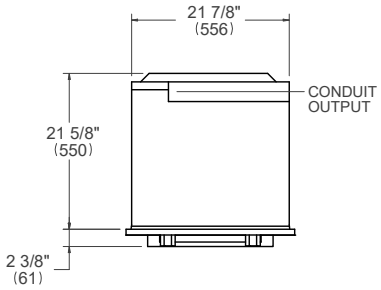

24” Electric Convection Single Ovens
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	155lb (70kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW



A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120/240 V 120/208 V	60 Hz 60 Hz	2800 W 2100 W
Service	16 Amp dedicated circuit		
Power Connection	METAL CONDUIT – 59” cord		

For detailed installation specifications consult the installation manual.


24” Electric Convection Single Ovens

Proud installation


TOP VIEW

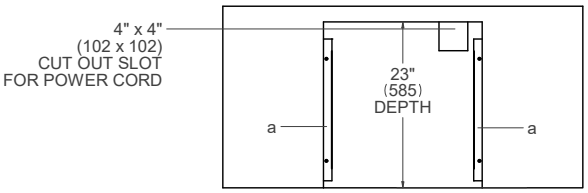

SIDE VIEW

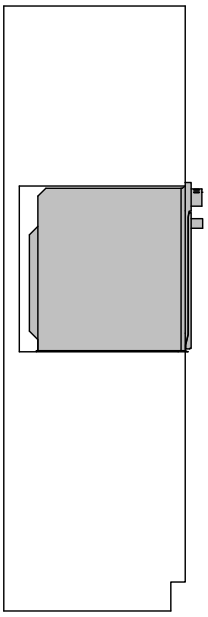

FRONT VIEW

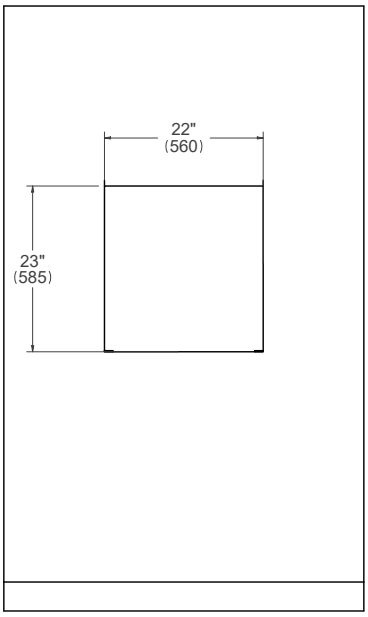


(a) Spacers - Included with appliance


24” Electric Convection Single Ovens

Flush installation non vented


TOP VIEW

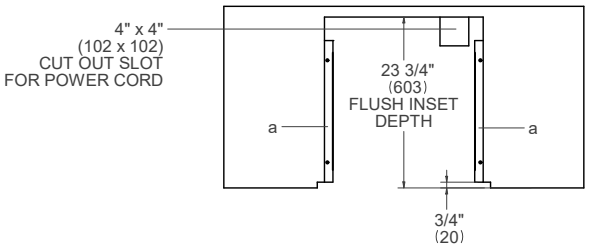

SIDE VIEW

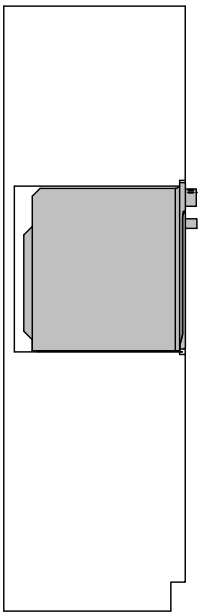

FRONT VIEW

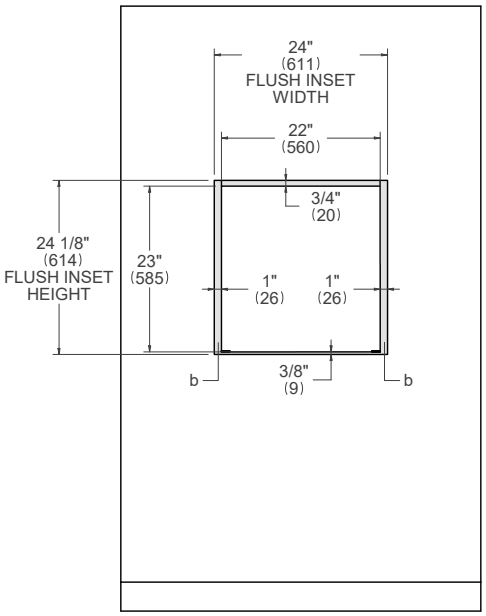


(a) Spacers - Included with appliance

(b) Visible Area - Match finish to outside cabinet panels

SPECIALTY OVENS

Bertazzoni has perfected cooking appliances for over 100 years. As a result, we understand that today's home chefs want a variety of technologies at their disposal. That means lifestyle-driven speed cooking without sacrificing flavor, texture or aroma. Or cooking with steam to retain the food's natural nutrients, vitamins and minerals. Bertazzoni built-in specialty ovens include convection, steam, speed and powerful microwave technology, along with a practical warming drawer. Engineered to integrate perfectly into the vertical and horizontal lines of your kitchen cabinets, they can be installed stacked or side by side to create perfect symmetry.


30" Convection Speed Ovens



30" Microwave Oven



30" Convection Steam Ovens



24" Convection Speed Oven



30" Warming Drawers



24" Microwave Drawer





TIMER
VEG
FISH
MEAT
REHEAT
CONV BROIL
BROIL
CONV
CONV STEAM
STEAM
WATER REFILL
°F
11:50
TIME
STOP
3 SEC
F.LLI BERTAZZONI
ITALIA

30” Convection Speed Ovens


Dimensions

PROF30SOEX
MAST30SOEX


SIDE VIEW

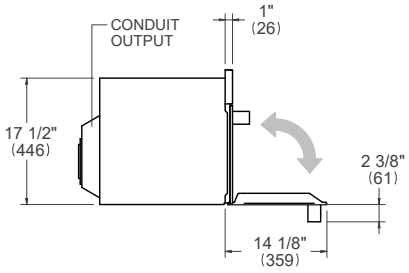

FRONT VIEW



TOP VIEW



30” Convection Speed Ovens
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW



A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120/240 V 60 Hz 3850 W
Service	16 Amp dedicated circuit
Power Connection	METAL CONDUIT – 59” cord

For detailed installation specifications consult the installation manual.


30” Convection Speed Ovens

Proud installation


TOP VIEW

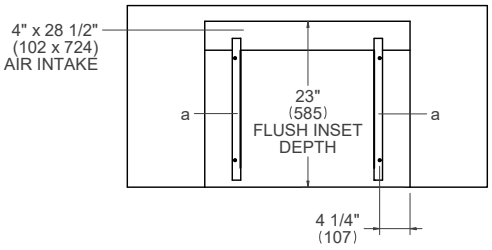

SIDE VIEW

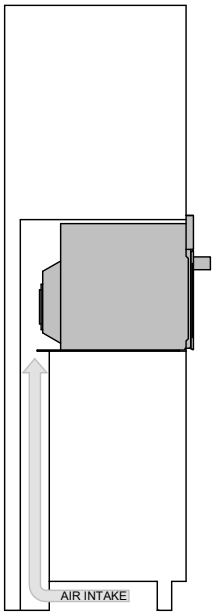

FRONT VIEW

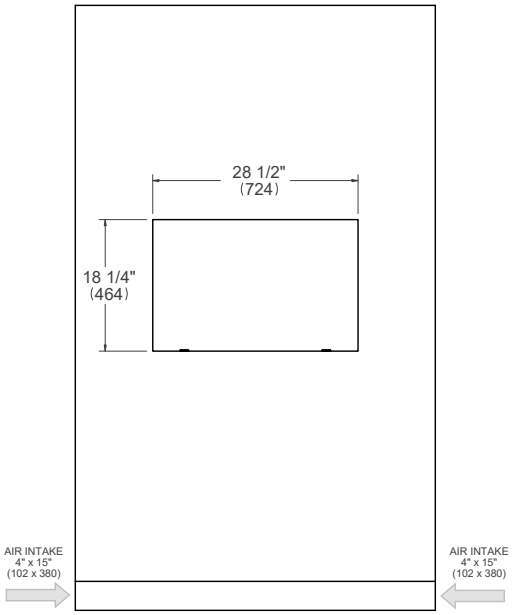


(a) Spacers - Included with appliance


30” Convection Speed Ovens

Flush installation


TOP VIEW

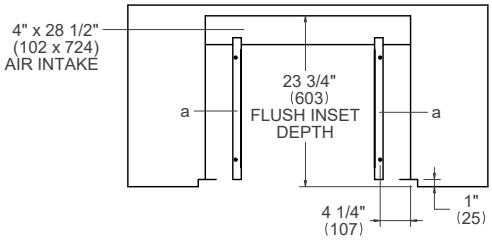

SIDE VIEW

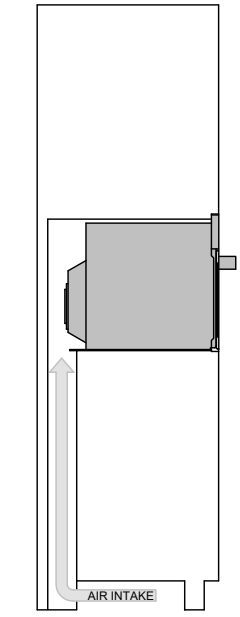

FRONT VIEW

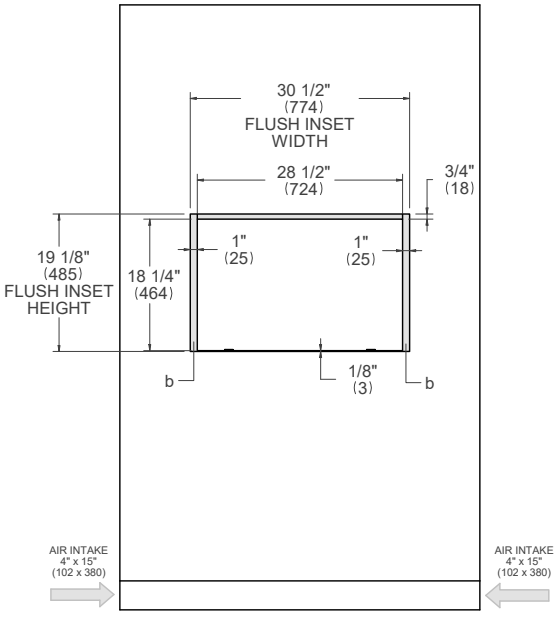


(a) Spacers - Included with appliance

(b) Visible Area - Match finish to outside cabinet panels

30” Convection Speed Ovens

Undercounter installation

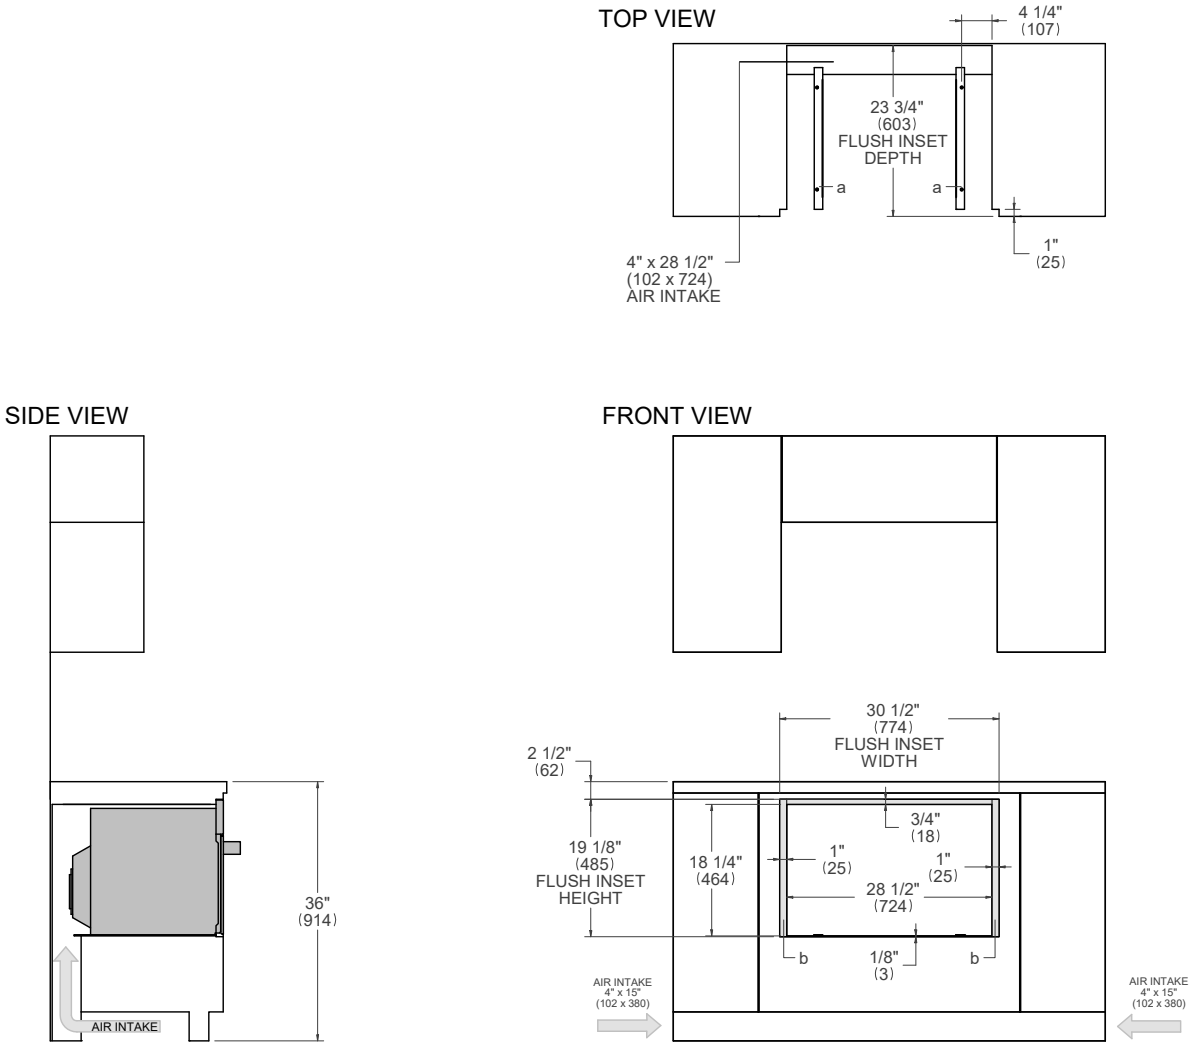

(a) Spacers - Included with appliance


(b) Visible Area - Match finish to outside cabinet panels

30” Convection Steam Ovens


Dimensions

PROF30CSEX
MAST30CSEX


SIDE VIEW

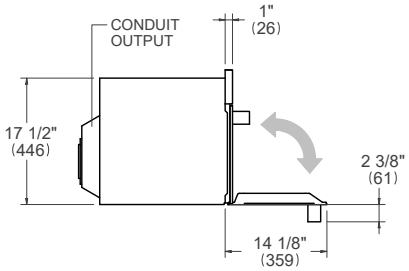

FRONT VIEW



TOP VIEW



30” Convection Steam Ovens
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW



A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120/240 V 60 Hz 3200 W
Service	16 Amp dedicated circuit
Power Connection	METAL CONDUIT – 59” cord

For detailed installation specifications consult the installation manual.


30” Convection Steam Ovens

Proud installation


TOP VIEW

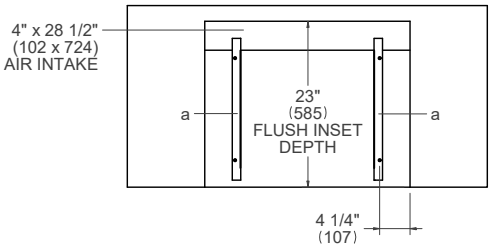

SIDE VIEW

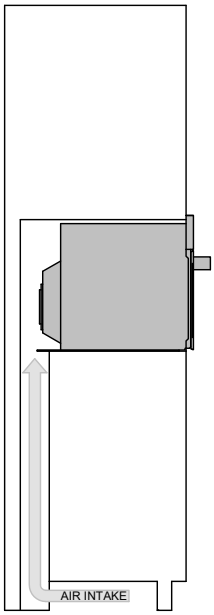

FRONT VIEW

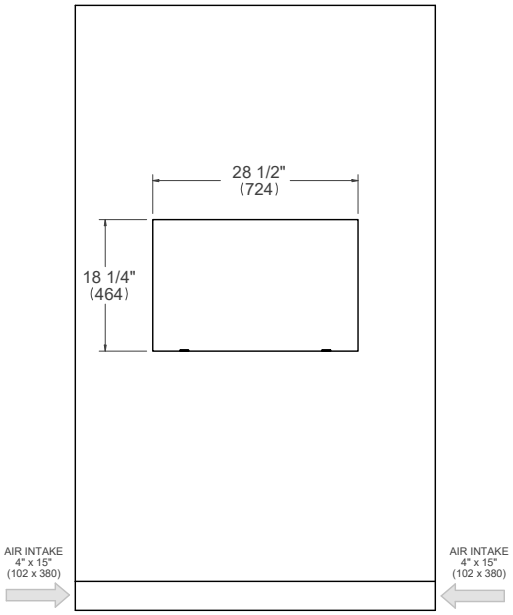


(a) Spacers - Included with appliance


30” Convection Steam Ovens

Flush installation


TOP VIEW

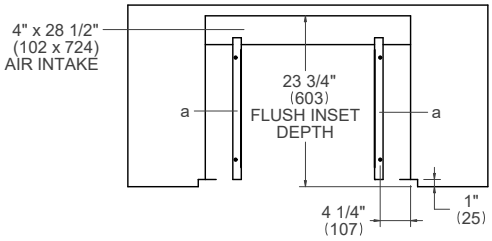

SIDE VIEW

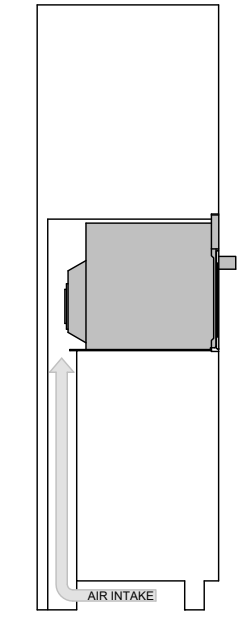

FRONT VIEW

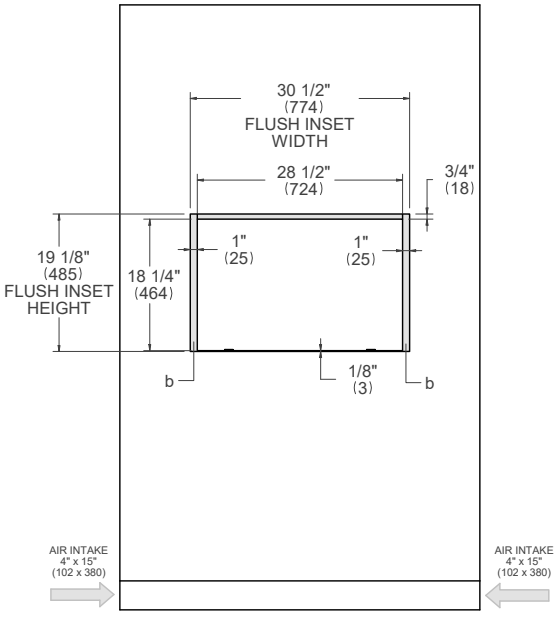


(a) Spacers - Included with appliance

(b) Visible Area - Match finish to outside cabinet panels


30” Convection Steam Ovens

Undercounter installation


TOP VIEW

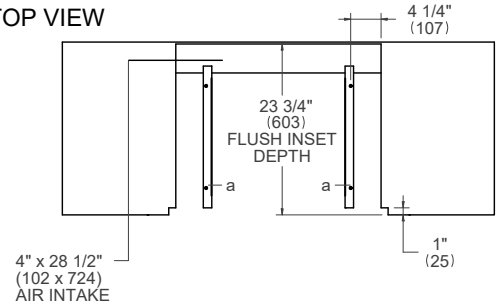

SIDE VIEW

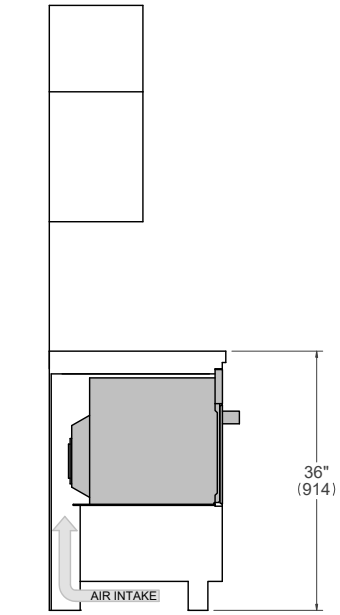

FRONT VIEW

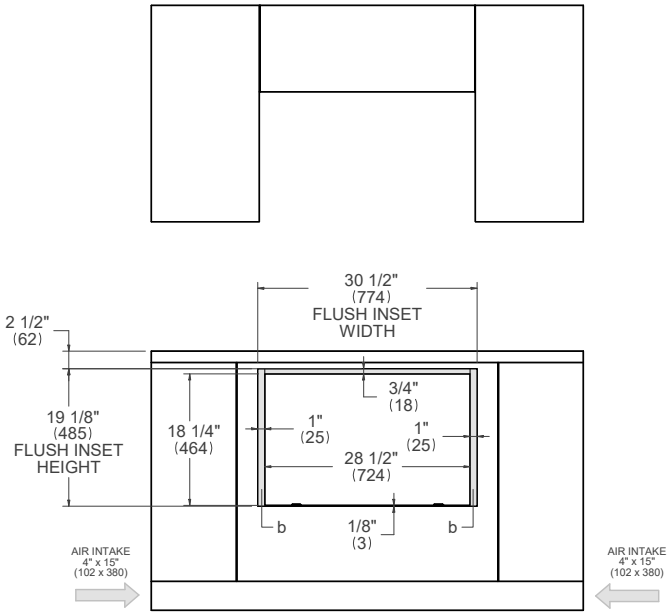


ɔacers – Included with appliance
ısible Area – Match finish to outside cabinet panels

30” Warming Drawers


Dimensions

PROF30WDEX
MAST30WDEX


SIDE VIEW

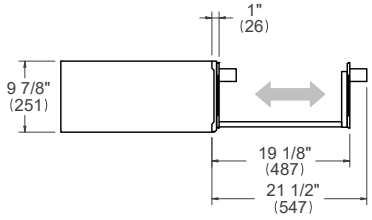

FRONT VIEW



TOP VIEW

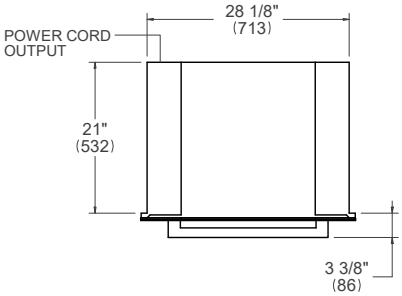

30” Warming Drawer
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW




Electrical supply	120 V	60 Hz	550 W
Service	5 Amp		
Power Connection	NEMA 5-15P		

For detailed installation specifications consult the installation manual.


30” Warming Drawer

Flush installation


TOP VIEW

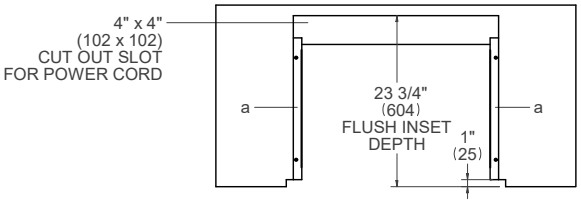

SIDE VIEW

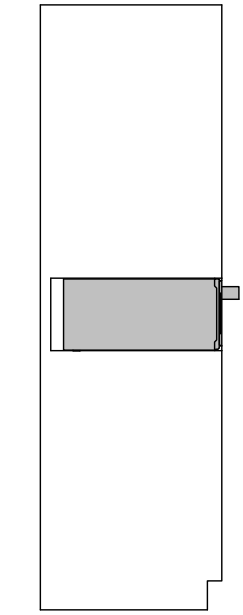

FRONT VIEW

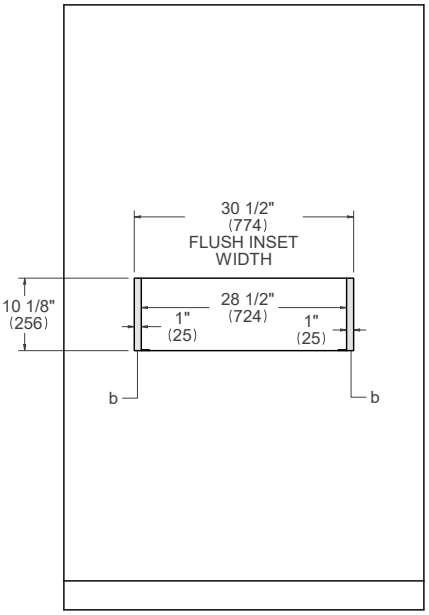

(a) Spacers - Included with appliance


(b) Visible Area - Match finish to outside cabinet panels

30” Microwave Oven


Dimensions

MO30STANE with frame FR30PROX


SIDE VIEW

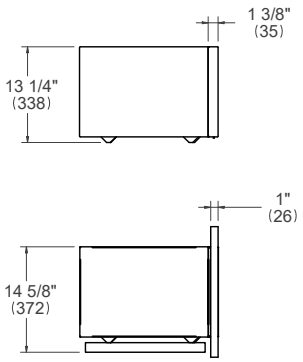

FRONT VIEW

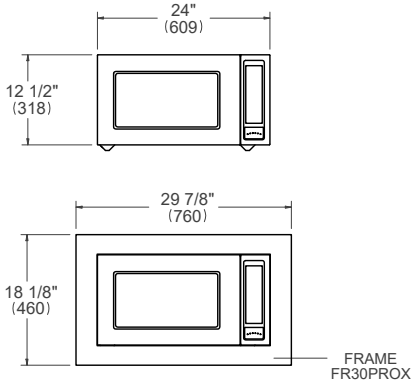

TOP VIEW



30” Microwave Oven
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW



A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120 V	60 Hz	1100 W
Service	10 Amp dedicated circuit		
Power Connection	NEMA 5-15P plug with 59” cord		

For detailed installation specifications consult the installation manual.


30” Microwave Oven

Proud installation


TOP VIEW

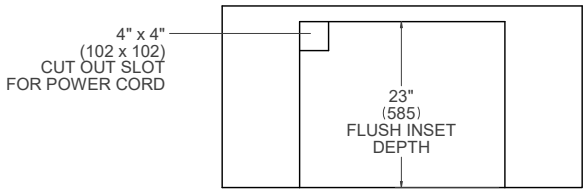

SIDE VIEW

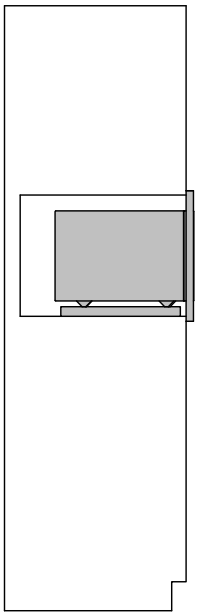


FRONT VIEW

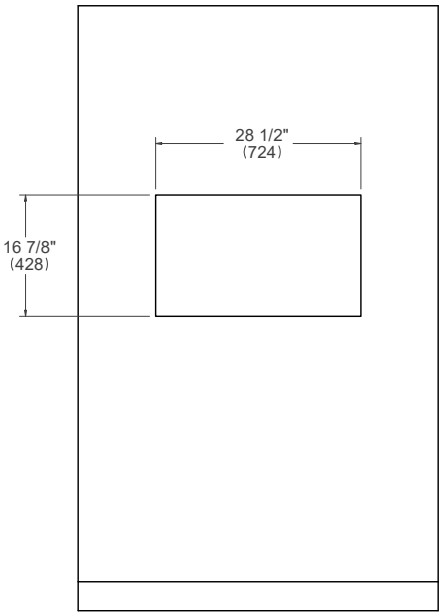


30” Microwave Oven

Flush installation


TOP VIEW

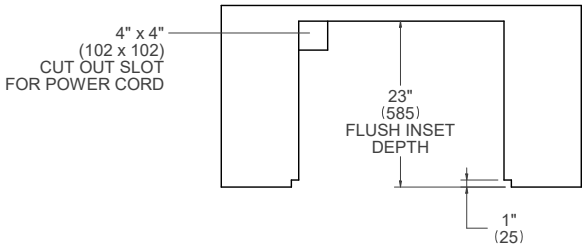

SIDE VIEW

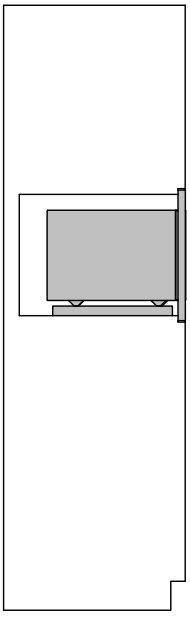

FRONT VIEW

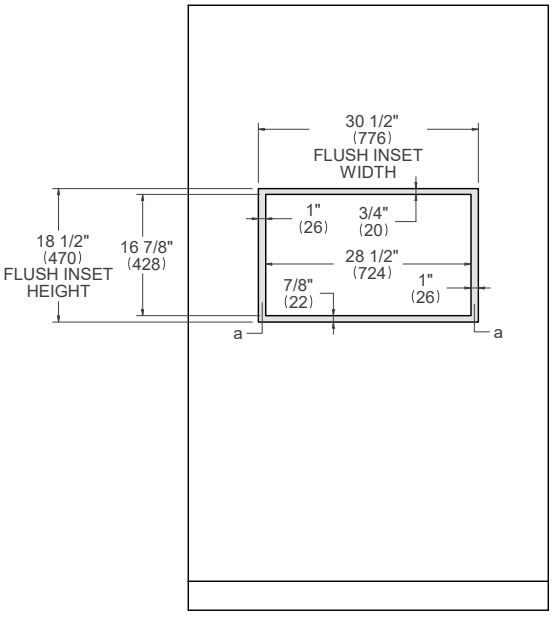


(a) Visible Area - Match finish to outside cabinet panels


24” Convection Speed Ovens
Dimensions

PROF24SOEX


SIDE VIEW

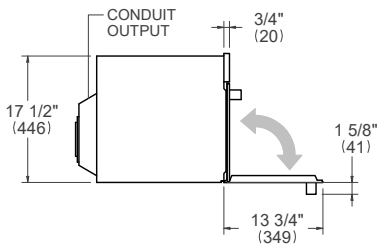

FRONT VIEW



TOP VIEW



24” Convection Speed Ovens
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW



E

A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	120/240 V 60 Hz 3850 W
Service	16 Amp dedicated circuit
Power Connection	METAL CONDUIT – 59” cord

For detailed installation specifications consult the installation manual.


24” Convection Speed Ovens

Proud installation


TOP VIEW

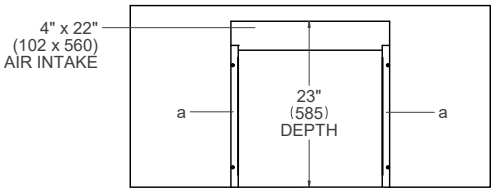

SIDE VIEW

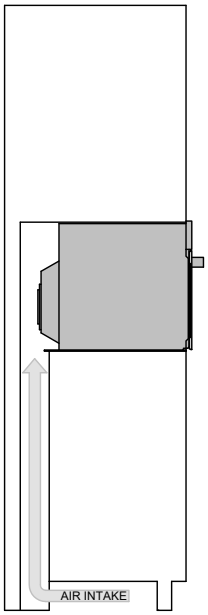

FRONT VIEW

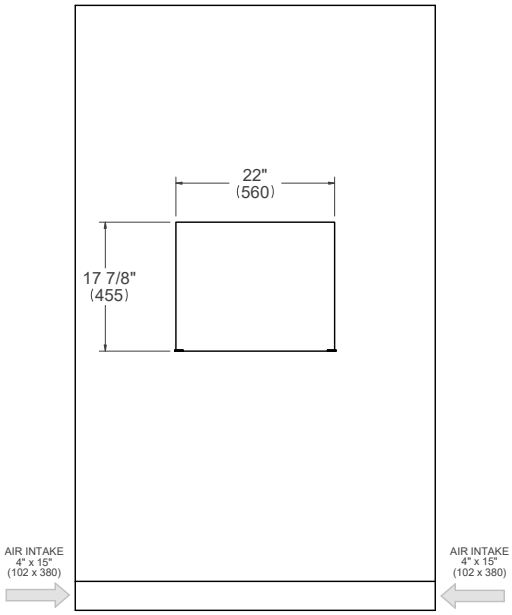


(a) Spacers - Included with appliance


24” Convection Speed Ovens

Flush installation


TOP VIEW

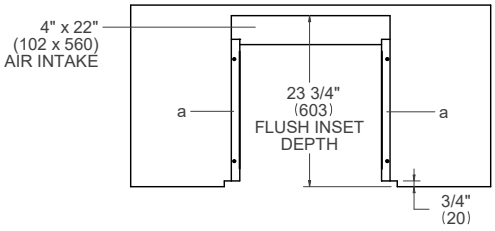

SIDE VIEW

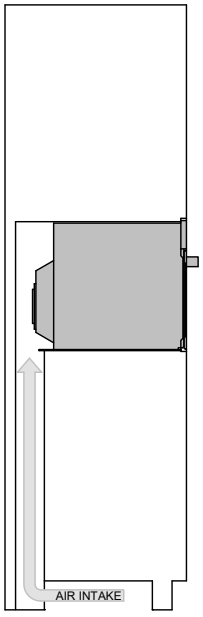

FRONT VIEW

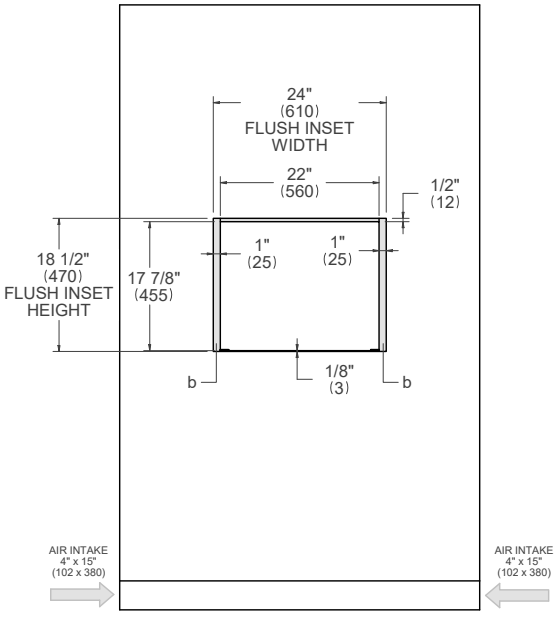


(a) Spacers - Included with appliance

(b) Visible Area - Match finish to outside cabinet panels


24” Convection Speed Ovens

Undercounter installation


TOP VIEW

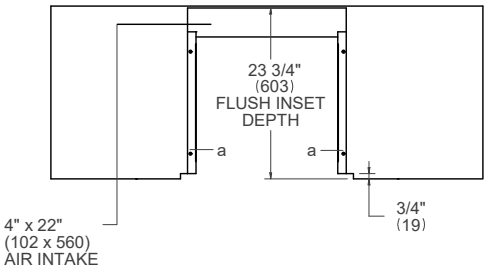

SIDE VIEW

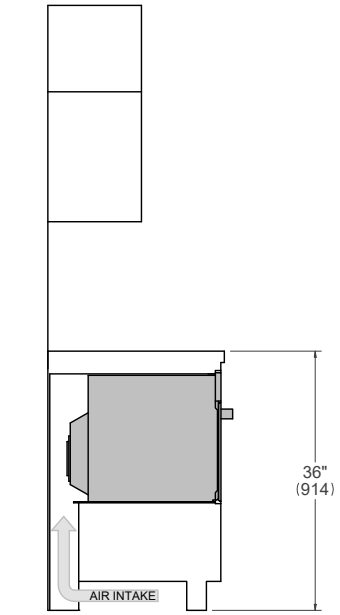

FRONT VIEW

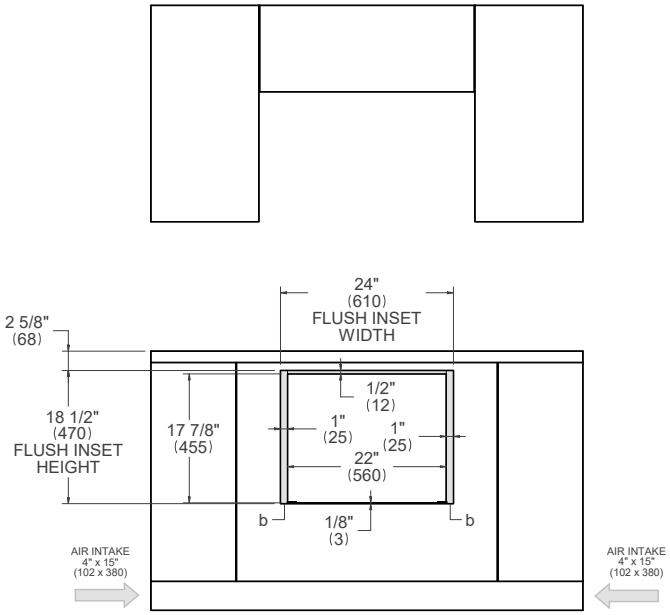

(a) Spacers - Included with appliance


(b) Visible Area - Match finish to outside cabinet panels

24” Microwave Drawer


Dimensions

MD24X


SIDE VIEW

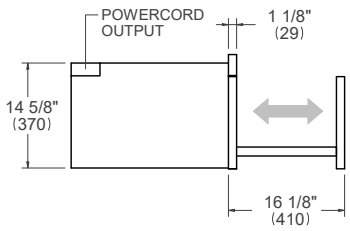

FRONT VIEW



TOP VIEW



24” Microwave Drawer
Installation requirements

INSTALLATION

The oven can be installed in a proud or flush application.
Finish the edges of the opening because they may be visible when the door is open.
The clearance between the oven and the kitchen units or other installed appliances must be enough to ensure sufficient cooling air ventilation.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, use only materials and finishes that will not discolor or delaminate and will withstand temperatures up to 195°F (90°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly-grounded horizontally- mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

FRONT VIEW




Electrical supply	120/240 V	60 Hz	1500 W
Service	15 Amp		
Power Connection	NEMA 5-15P plug with 47” cord		

For detailed installation specifications consult the installation manual.


24” Microwave Drawer

Flush installation


TOP VIEW

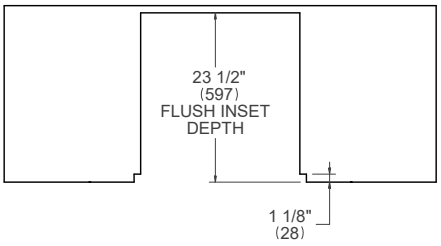

SIDE VIEW



FRONT VIEW

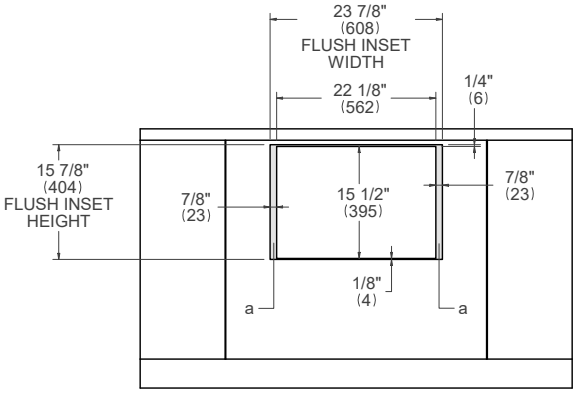


(a) Visible Area - Match finish to outside cabinet panels

GAS RANGETOPS & COOKTOPS


Bertazzoni rangetops and cooktops offer amazing versatility and feature a maximized cooking surface. Available in 24”, 30”, 36” and 48” versions, together with a variety of versatile burner configurations, these powerful models are the perfect pairing any Bertazzoni built-in oven.

Rangetops

48” Rangetops




36” Rangetops




Side control drop-in cooktops


36” Drop-in Cooktops
6 burners



36” Drop-in Cooktops
5 burners




30” Drop-in Cooktops
4 burners




Front control built-in cooktops

36” Cooktops
5 burners



30” Cooktops
5 burners



24” Cooktops
4 burners







48” Rangetops
Dimensions

PROF486GRTBXT
MAST486GRTBXT


TOP VIEW

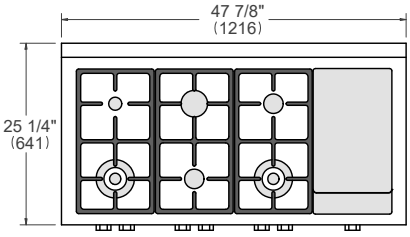

FRONT VIEW



SIDE VIEW

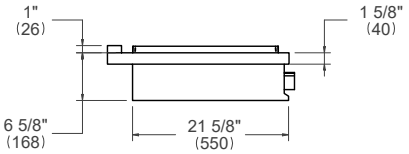

48” Rangetops
Installation requirements

INSTALLATION

The gas rangetops can be mounted in a standard installation sitting on top of the countertop surface.

If a drawer is placed under the appliance, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood, refer to the hood manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	187 lb (85kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V 60 Hz 1100 W
Service	10 Amp
Power Connection	NEMA 5-15P plug with 59” cord

GAS CONNECTION

The gas rangetops can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.


Gas Inlet	1/2” NPT
Natural Gas	4” iwc (1.00 kPa)
LPG Gas	10” iwc (2.50 kPa)

Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.


For detailed installation specifications consult the installation manual.

48” Rangetops
Installation


TOP VIEW

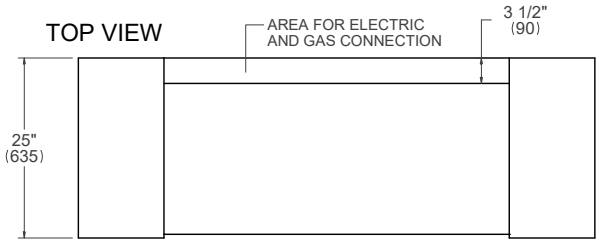

SIDE VIEW

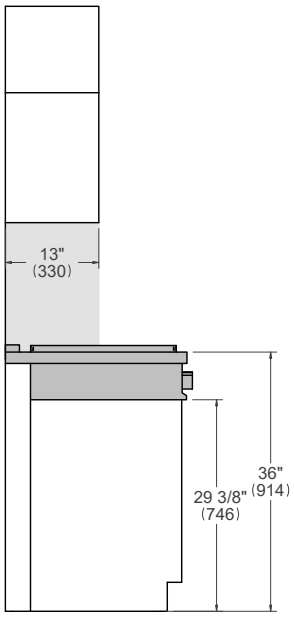

FRONT VIEW

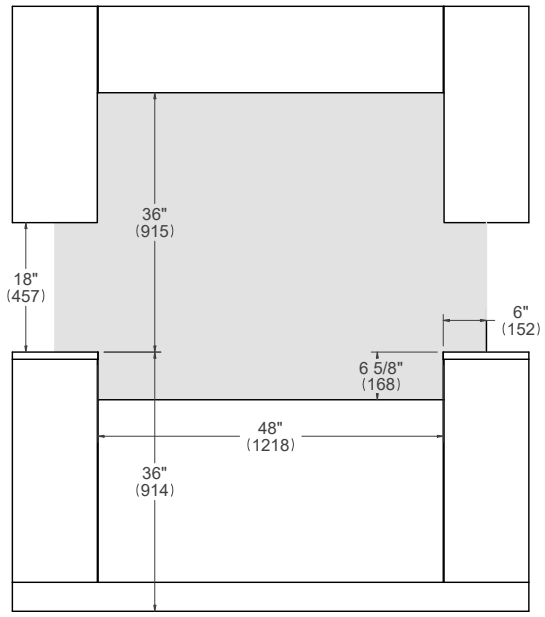


Combustible material cannot be located within shaded area.


36” Rangetops
Dimensions

PROF366RTBXT
MAST366RTBXT
MAST366RTXE


TOP VIEW



FRONT VIEW



SIDE VIEW

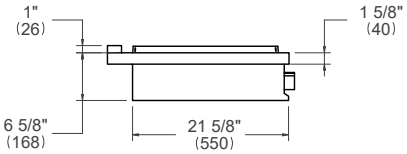

36” Rangetops
Installation requirements

INSTALLATION

The gas rangetops can be mounted in a standard installation sitting on top of the countertop surface.
If a drawer is placed under the appliance, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood, refer to the hood manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	165lb (75kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V 60 Hz 1 W
Service	1 Amp
Power Connection	NEMA 5-15P plug with 59” cord

GAS CONNECTION

The gas rangetops can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.


Gas Inlet	1/2” NPT
Natural Gas	4” iwc (1.00 kPa)
LPG Gas	10” iwc (2.50 kPa)

Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.


For detailed installation specifications consult the installation manual.

36” Rangetops
Installation


TOP VIEW

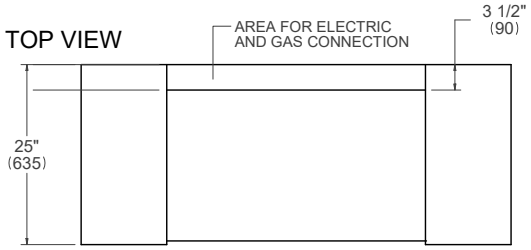

SIDE VIEW

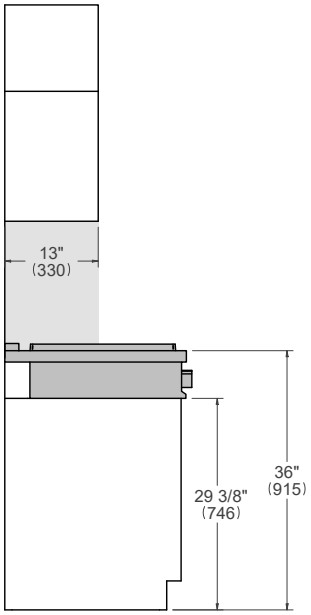

FRONT VIEW

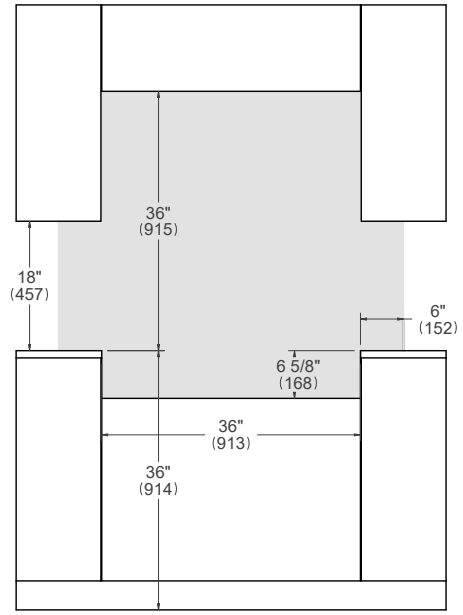


Combustible material cannot be located within shaded area.

36” Drop-in Cooktops 6 burners


Dimensions

PROF366QBXT
MAST366QBXT

TOP VIEW



FRONT VIEW



SIDE VIEW



36” Drop-in Cooktops 6 burners
Installation requirements

INSTALLATION

The gas cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the work, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	132 lb (60kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V	60 Hz	1 W
Service	1 Amp		
Power Connection	NEMA 5-15P plug with 59” cord		

GAS CONNECTION

The gas cooktop can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.

Gas Inlet	1/2” NPT	
Natural Gas	4” iwc	(1.00 kPa)
LPG Gas	10” iwc	(2.50 kPa)


Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.

For detailed installation specifications consult the installation manual.


36” Drop-in Cooktops 6 burners

Installation


TOP VIEW

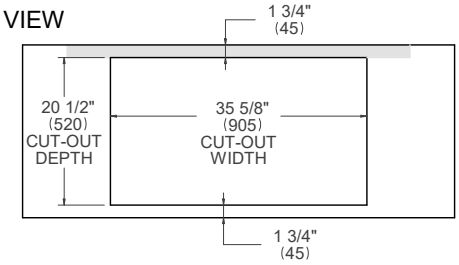

SIDE VIEW

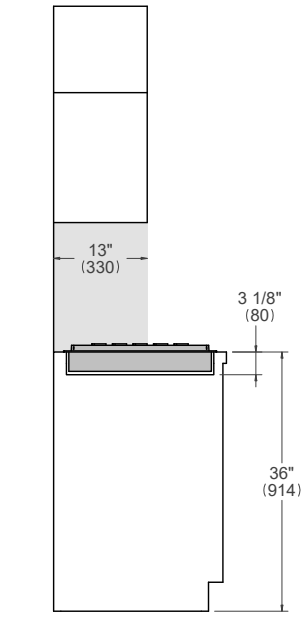

FRONT VIEW

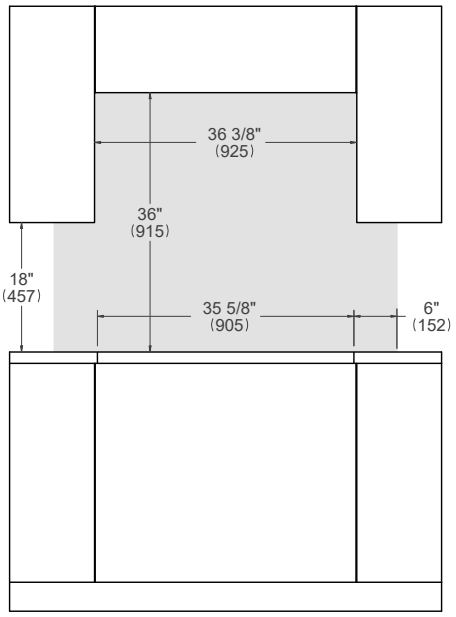

Combustible material cannot be installed within shaded area.


36” Drop-in Cooktops 5 burners

Dimensions


PROF365QBXT
PROF365QXE

MAST365QBXT
MAST365QXE

TOP VIEW



FRONT VIEW



SIDE VIEW



36” Drop-in Cooktops 5 burners
Installation requirements

INSTALLATION

The gas cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the work, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	125 lb (57kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V	60 Hz	1 W
Service	1 Amp		
Power Connection	NEMA 5-15P plug with 59” cord		

GAS CONNECTION

The gas cooktop can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.

Gas Inlet	1/2” NPT	
Natural Gas	4” iwc	(1.00 kPa)
LPG Gas	10” iwc	(2.50 kPa)


Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.

For detailed installation specifications consult the installation manual.


36” Drop-in Cooktops 5 burners

Installation


TOP VIEW

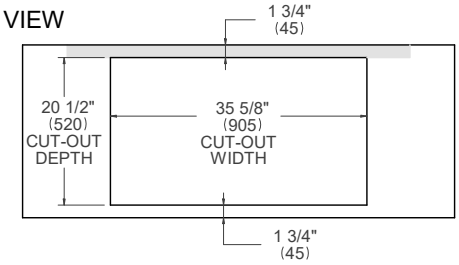

SIDE VIEW

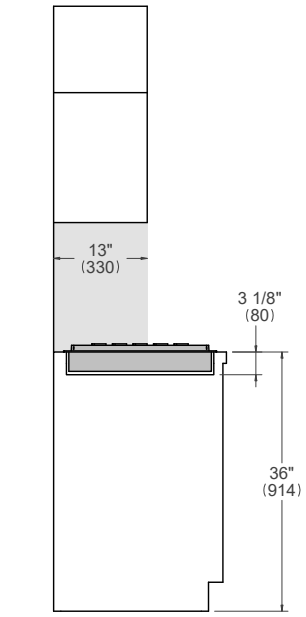

FRONT VIEW

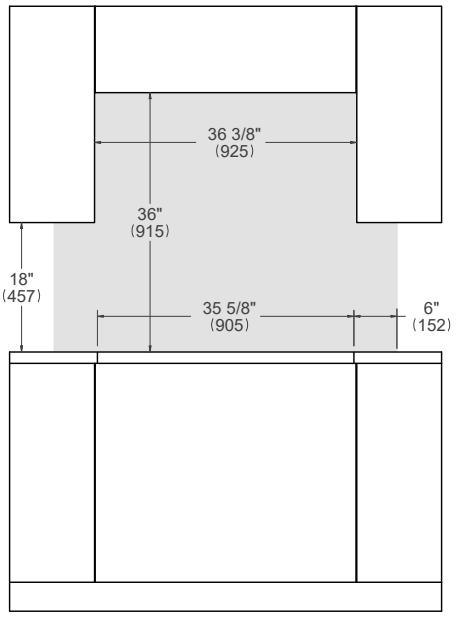

Combustible material cannot be installed within shaded area.


30” Drop-in Cooktops

Dimensions


PROF304QBXT
PROF304QXE

MAST304QBXT
MAST304QXE

TOP VIEW



FRONT VIEW



SIDE VIEW



30” Drop-in Cooktops
Installation requirements

INSTALLATION

The gas cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the work, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110lb (50kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V	60 Hz	1 W
Service	1 Amp		
Power Connection	NEMA 5-15P plug with 59” cord		

GAS CONNECTION

The gas coopktop can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.


Gas Inlet	1/2” NPT	
Natural Gas	4” iwc	(1.00 kPa)
LPG Gas	10” iwc	(2.50 kPa)

Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.


For detailed installation specifications consult the installation manual.

30” Drop-in Cooktops
Installation


TOP VIEW

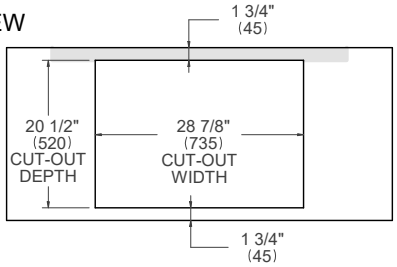

SIDE VIEW

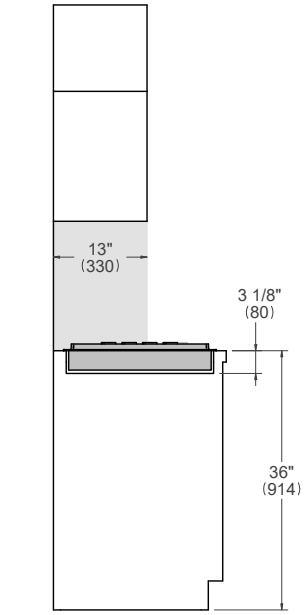

FRONT VIEW

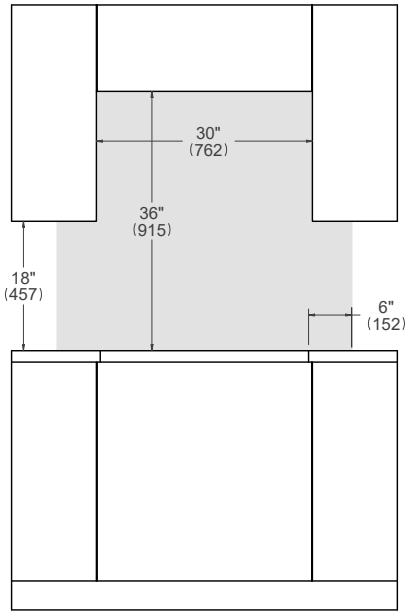


Combustible material cannot be installed within shaded area.


36” Gas Cooktop Front Control
Dimensions

PROF365CTXV

TOP VIEW



FRONT VIEW

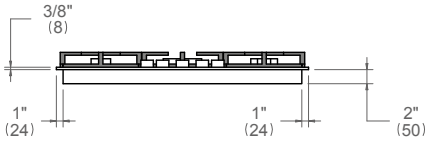

SIDE VIEW



36” Gas Cooktop Front Control
Installation requirements

INSTALLATION

The gas cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the work, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	88lb (40kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V	60 Hz	1 W
Service	1 Amp		
Power Connection	NEMA 5-15P plug with 59” cord		

GAS CONNECTION

The gas cooktop can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.


Gas Inlet	1/2” NPT
Natural Gas	4” iwc (1.00 kPa)
LPG Gas	10” iwc (2.50 kPa)

Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.


For detailed installation specifications consult the installation manual.

36” Gas Cooktop Front Control
Installation


TOP VIEW

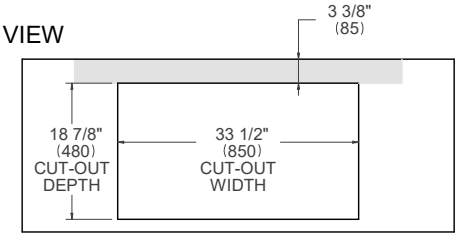

SIDE VIEW

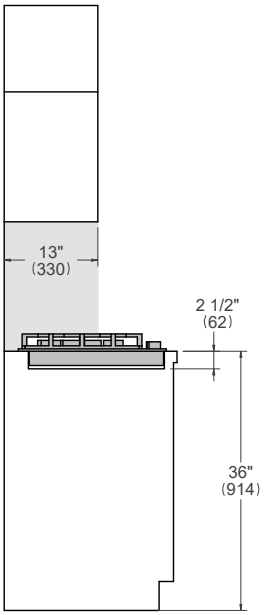

FRONT VIEW

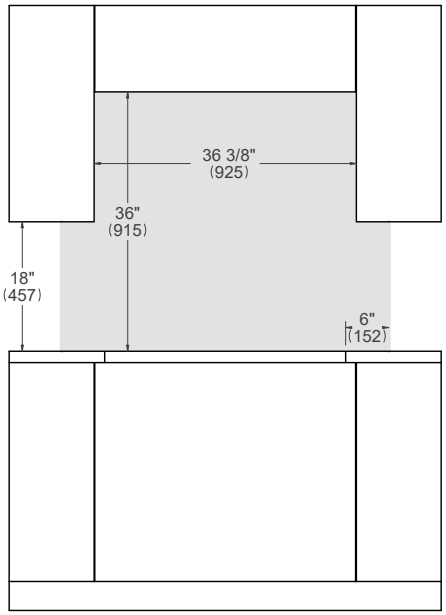


Combustible material cannot be installed within shaded area.


30” Gas Cooktop Front Control
Dimensions

PROF305CTXV

TOP VIEW



FRONT VIEW



SIDE VIEW



30” Gas Cooktop Front Control
Installation requirements

INSTALLATION

The gas cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the work, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	81lb (37kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V 60 Hz 1 W
Service	1 Amp
Power Connection	NEMA 5-15P plug with 59” cord

GAS CONNECTION

The gas cooktop can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.


Gas Inlet	1/2” NPT
Natural Gas	4” iwc (1.00 kPa)
LPG Gas	10” iwc (2.50 kPa)

Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.


For detailed installation specifications consult the installation manual.

30” Gas Cooktop Front Control
Installation


TOP VIEW

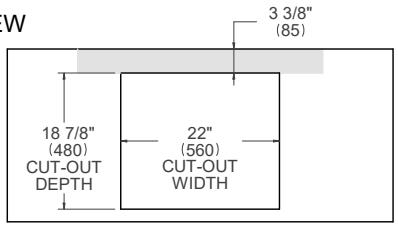

SIDE VIEW

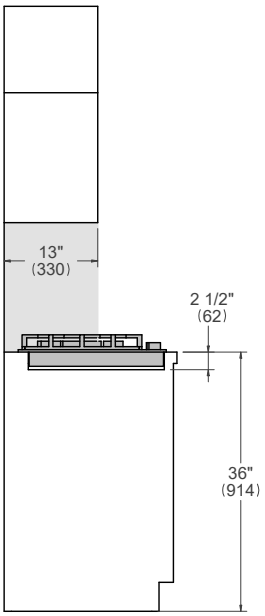

FRONT VIEW

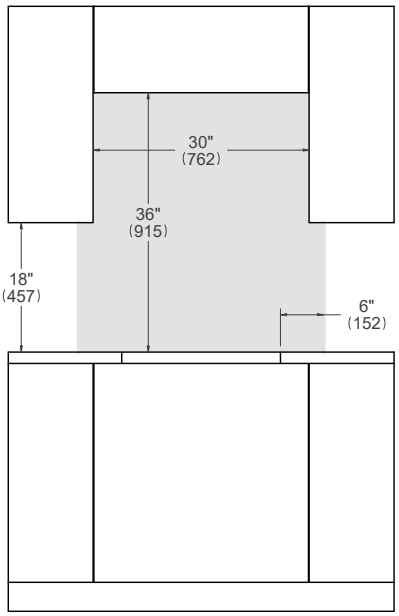


Combustible material cannot be installed within shaded area.


24” Gas Cooktop Front Control
Dimensions

PROF244CTXV


TOP VIEW



FRONT VIEW



SIDE VIEW



24” Gas Cooktop Front Control
Installation requirements

INSTALLATION

The gas cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the work, avoid to put into this drawer flammable objects or not heat-resistant objects.
For installation with an updraft or downdraft hood as well as any OTR, refer to the hood/OTR manufacturer’s installation requirements.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C). Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation. The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	84 lb (38kg)

ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly-grounded horizontally- mounted electrical receptacle should be installed. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



Electrical supply	120 V 60 Hz 1 W
Service	1 Amp
Power Connection	NEMA 5-15P plug with 59” cord

GAS CONNECTION

The gas cooktop can be used with Natural or LP/Propane gas. An agency-approved, properly-sized manual shutoff valve should be installed. To connect gas between shut-off valve and regulator, use agency-approved, properly sized flexible or rigid pipe. Check all local code requirements.


Gas Inlet	1/2” NPT
Natural Gas	4” iwc (1.00 kPa)
LPG Gas	10” iwc (2.50 kPa)

Since service pressure may fluctuate with local demand, every gas cooktop must be equipped with the supplied pressure regulator on the incoming service line for safe and efficient operation.


For detailed installation specifications consult the installation manual.

24” Gas Cooktop Front Control
Installation


TOP VIEW

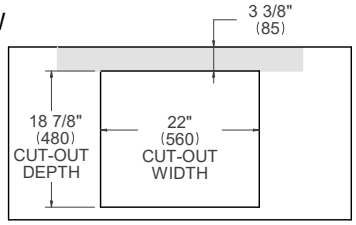

SIDE VIEW

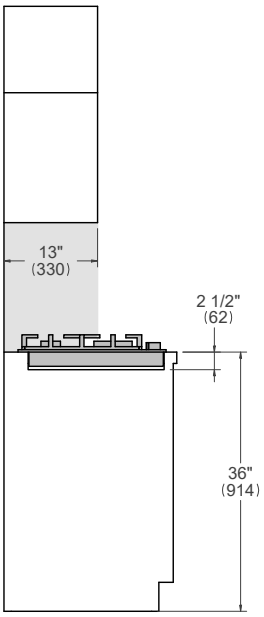

FRONT VIEW

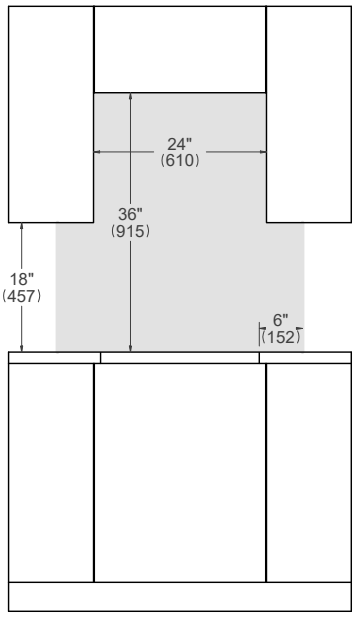


Combustible material cannot be installed within shaded area.

INDUCTION & ELECTRIC COOKTOPS


Electric induction and electric CERAN® cooktops add an elegant and clean look to your kitchen, with the added advantage of faster induction heating. On the induction models, precision touch controls and digital timed cooking functions let you automatically manage the entire cooking process; sensor controlled cookware detection means all the energy is used to heat the exact space instantly from the moment you turn them on. They make preparing a wide variety of dishes effortless, with 5 or 4 zones for cooking. And when you've finished cooking, cleaning up is equally straightforward.

Induction

36" Induction Cooktop




30" Induction Cooktop



CERAN®

30" Electric Ceramic Cooktop



24" Electric Ceramic Cooktop






36” Induction Cooktop


Dimensions

P365IAE


TOP VIEW



FRONT VIEW



SIDE VIEW



36” Induction Cooktop
Installation requirement

INSTALLATION

The induction cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation. For installation with an updraft or downdraft hood as well as any OTR, refer to thr hood/OTR manufacturer’s installation requirements.If a drawer is placed under the worktop, avoid to put into this drawer flammable objects or not heat-resistant objects.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C).
Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	110 lb (50kg)

ELECTRICAL REQUIREMENT

A properly-grounded horizontally- mounted electrical receptacle should be installed.
The installation must comply with all applicable electrical codes. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW




A separate circuit and a circuit breaker servicing only this appliance is reccomended

Electrical supply	208/240 V 60 Hz 11100 W
Service	55 Amp dedicated circuit
Power Connection	METAL CONDUIT - 54” cord


For detailed installation specifications consult the installation manual.

36” Induction Cooktop
Installation


TOP VIEW

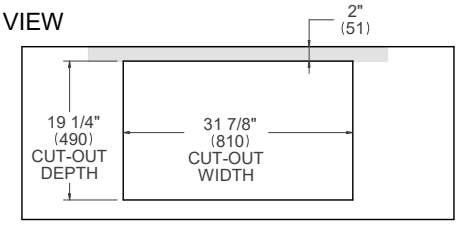

SIDE VIEW

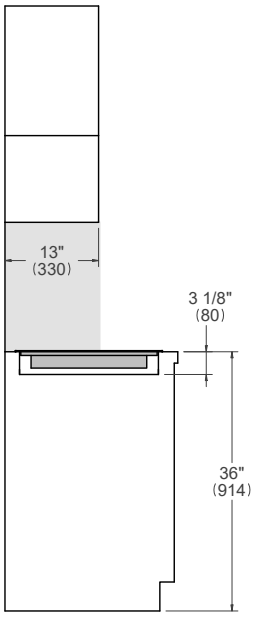

FRONT VIEW

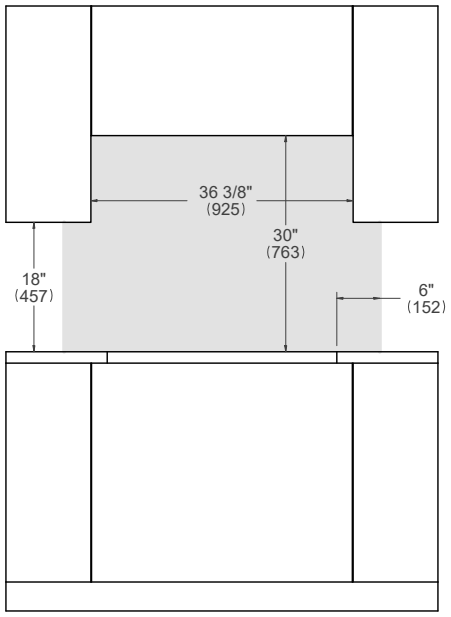


Combustible material cannot be installed within shaded area.

30” Induction Cooktop


Dimensions

P304IAE


TOP VIEW



FRONT VIEW



SIDE VIEW



30” Induction Cooktop
Installation requirements

INSTALLATION

The induction cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation. For installation with an updraft or downdraft hood as well as any OTR, refer to thr hood/OTR manufacturer’s installation requirements.If a drawer is placed under the worktop, avoid to put into this drawer flammable objects or not heat-resistant objects.
For instructions and clearance of product combinations please see the Multiple Installation Sections (page 86).

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C).
Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	88lb (40kg)

ELECTRICAL REQUIREMENT

A properly-grounded horizontally- mounted electrical receptacle should be installed.
The installation must comply with all applicable electrical codes. Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW




A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	208/240 V 60 Hz 7400 W
Service	40 Amp dedicated circuit
Power Connection	METAL CONDUIT - 54” cord

30” Induction Cooktop
Installation


TOP VIEW

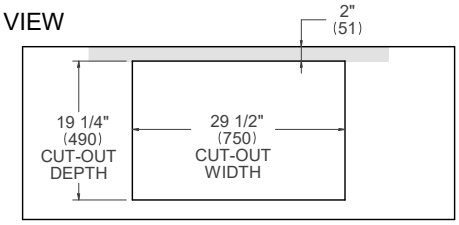

SIDE VIEW

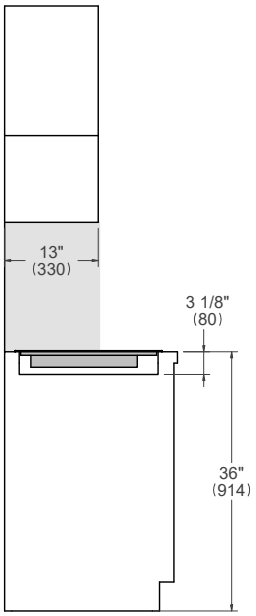

FRONT VIEW

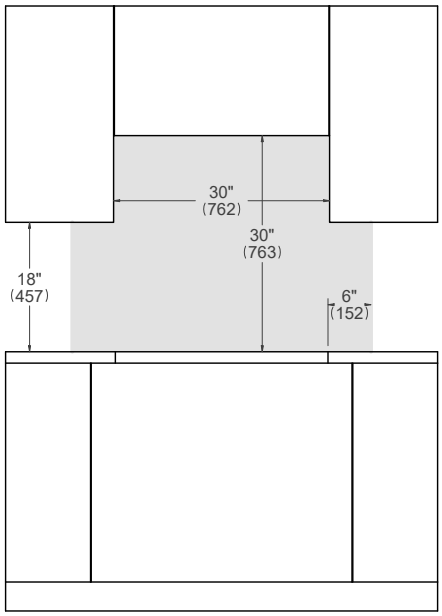


Combustible material cannot be installed within shaded area.

30” Electric Ceramic Cooktop


Dimensions

PE304CER


TOP VIEW



FRONT VIEW



SIDE VIEW



30” Electric Ceramic Cooktop
Installation requirements

INSTALLATION

The electric cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the worktop, avoid to put into this drawer flammable objects or not heat-resistant objects.
For instructions and clearance of product combinations please see the Multiple Installation Sections.

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C).
Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	88lb (40kg))

ELECTRICAL REQUIREMENT

A properly-grounded horizontally- mounted electrical receptacle should be installed.
The installation must comply with all applicable electrical codes.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW



A separate circuit and a circuit breaker servicing only this appliance is reccomended


Electrical supply	240 V		60 Hz	6400 W
	208 V	31 A	60 Hz	4800 W
Service	35 Amp dedicated circuit			
Power Connection	METAL CONDUIT - 54” cord			

For detailed installation specifications consult the installation manual.


30” Electric Ceramic Cooktop

Installation


TOP VIEW

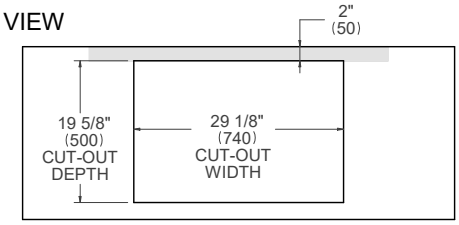

SIDE VIEW

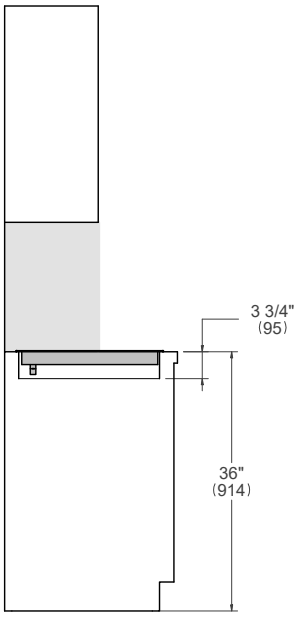

FRONT VIEW

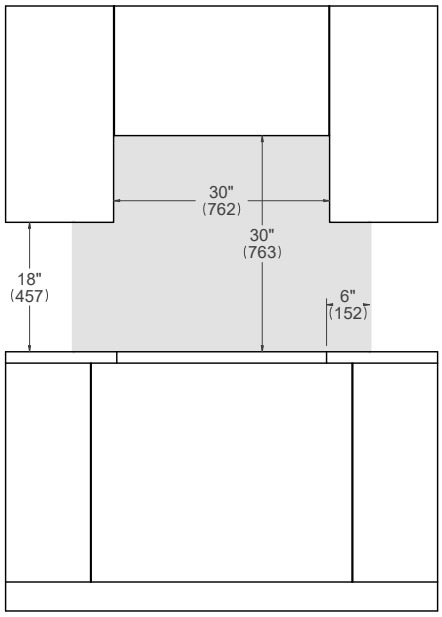


Combustible material cannot be installed within shaded area.

24” Electric Ceramic Cooktop


Dimensions

PE244CER


TOP VIEW



FRONT VIEW



SIDE VIEW



24” Electric Ceramic Cooktop
Installation requirements

INSTALLATION

The electric cooktop can be mounted in a standard installation sitting on top of the countertop surface.
The clearance between the hob and the kitchen furniture or other installed appliances must be enough to ensure sufficient cooling air ventilation.
If a drawer is placed under the worktop, avoid to put into this drawer flammable objects or not heat-resistant objects.
For instructions and clearance of product combinations please see the Multiple Installation Sections.

CABINET REQUIREMENT


To prevent possible damage to cabinets and cabinet finishes, the countertop must be able to withstand temperatures up to 300°F (149°C).
Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
BE SURE that support for this appliance is horizontale before you perform the installation.
The cabinet base must be flat and capable of supporting the weight of the oven when in use.

Minimum Suggested Load on Cabinet Base Board	84 lb (38 kg)

ELECTRICAL REQUIREMENT

A properly-grounded horizontally- mounted electrical receptacle should be installed.
The installation must comply with all applicable electrical codes.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations. Placement within the opening may require additional cabinet depth.

FRONT VIEW




A separate circuit and a circuit breaker servicing only this appliance is reccomended

Electrical supply	240 V		60 Hz	5900 W
	208 V	28 A	60 Hz	4200 W
Service	30 Amp dedicated circuit			
Power Connection	METAL CONDUIT - 54” cord			


24” Electric Ceramic Cooktop

Installation


TOP VIEW

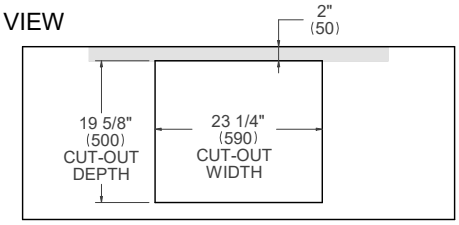

SIDE VIEW

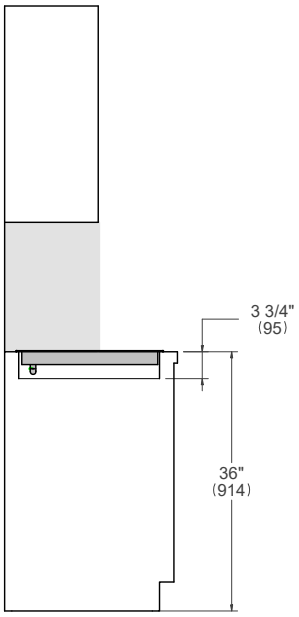

FRONT VIEW

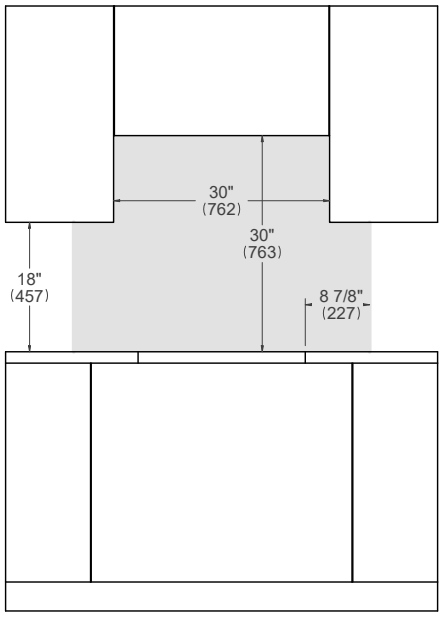

Combustible material cannot be installed within shaded area.

MULTIPLE INSTALLATIONS


BUILD YOUR SUITE

Select the perfect combination from the following pages to build a unique kitchen – the true heart of the home, where people can experience the Bertazzoni joy of family, food and engineering.




30" Specialty Oven + 30" Convection Single Oven + 30" Warming Drawer

Proud installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX
PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV
PROF30WDEX
MAST30WDEX


TOP VIEW

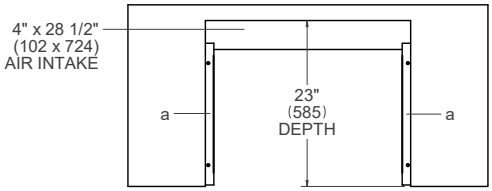

SIDE VIEW

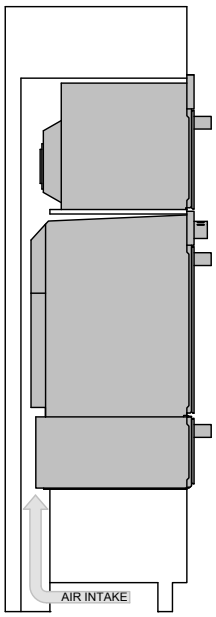

FRONT VIEW

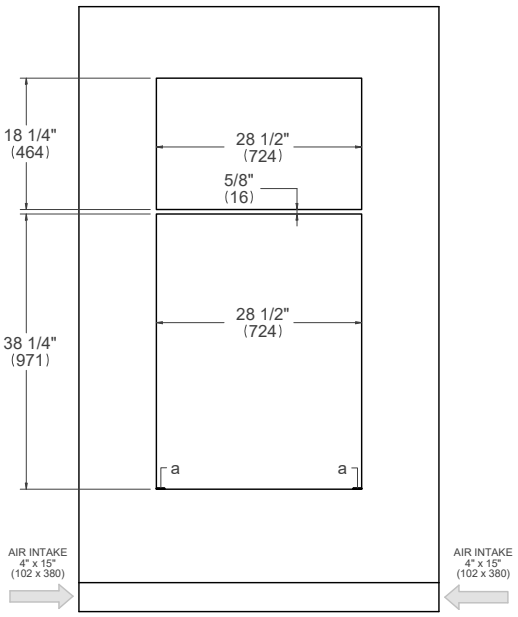


(a) Spacers - Included with appliance

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30” Specialty Oven + 30” Convection Single Oven + 30” Warming Drawer

Flush installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX


PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV

PROF30WDEX
MAST30WDEX


TOP VIEW

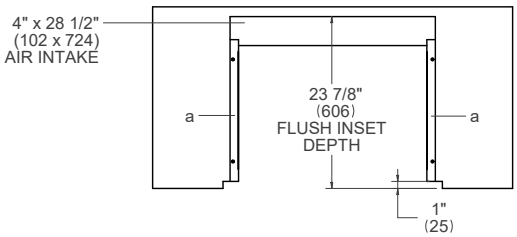

SIDE VIEW

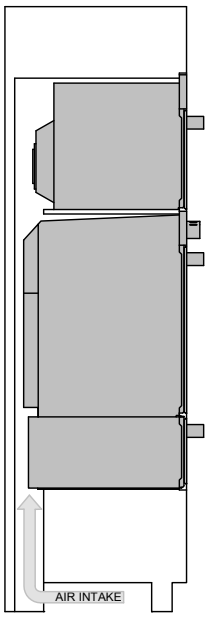

FRONT VIEW

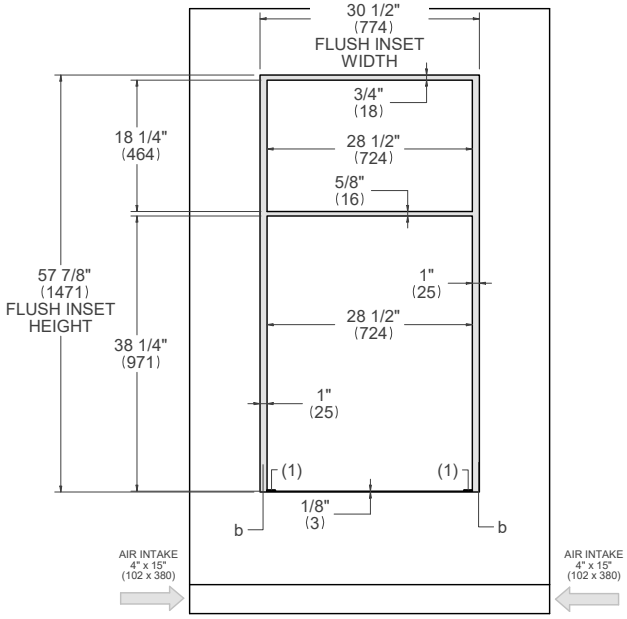


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Specialty Oven +
30" Convection Single Oven

Proud installation




PROF30SOEX	PROF30FSEXT
PROF30CSEX	PROF30FSEXV
MAST30SOEX	MAST30FSEXT
MAST30CSEX	MAST30FSEXV


TOP VIEW

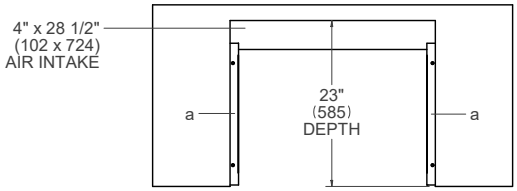

SIDE VIEW

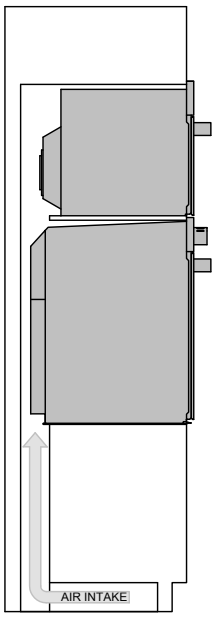


FRONT VIEW

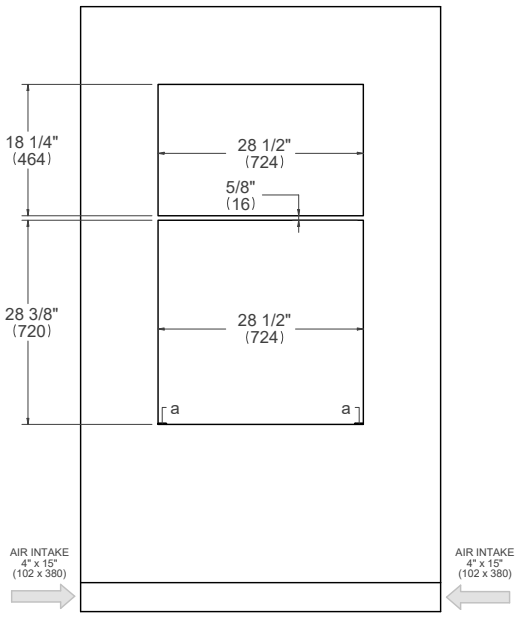

(a) Spacers - Included with appliance


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Specialty Oven +
30" Convection Single Oven
Flush installation




PROF30SOEX PROF30FSEXT
PROF30CSEX PROF30FSEXV
MAST30SOEX MAST30FSEXT
MAST30CSEX MAST30FSEXV


TOP VIEW

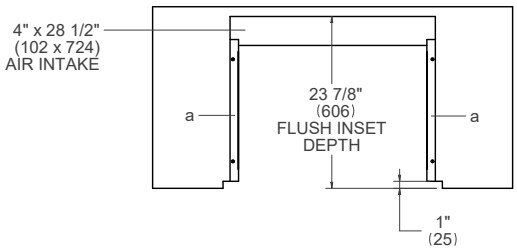

SIDE VIEW

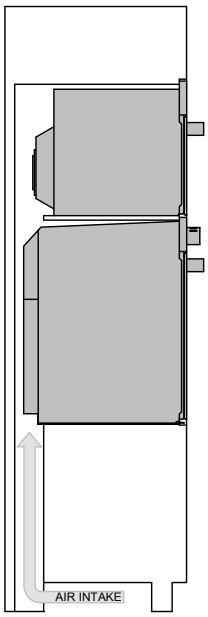


FRONT VIEW

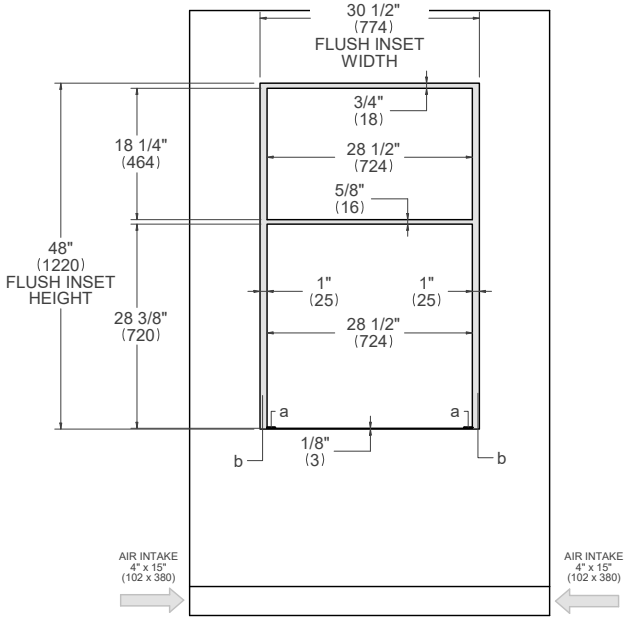

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Microwave +
30" Convection Single Oven
Proud installation




MO30STANE

PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV


TOP VIEW

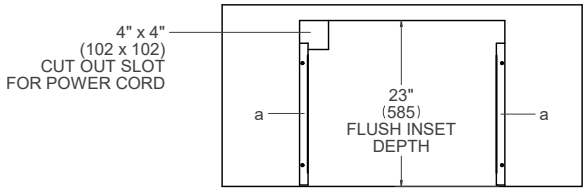

SIDE VIEW

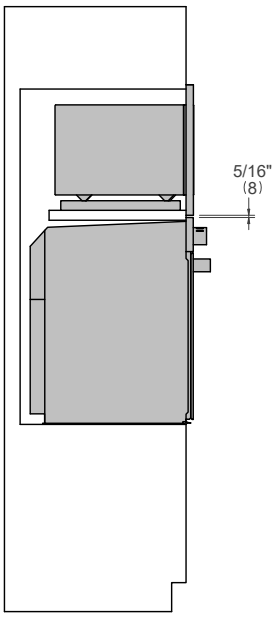


FRONT VIEW

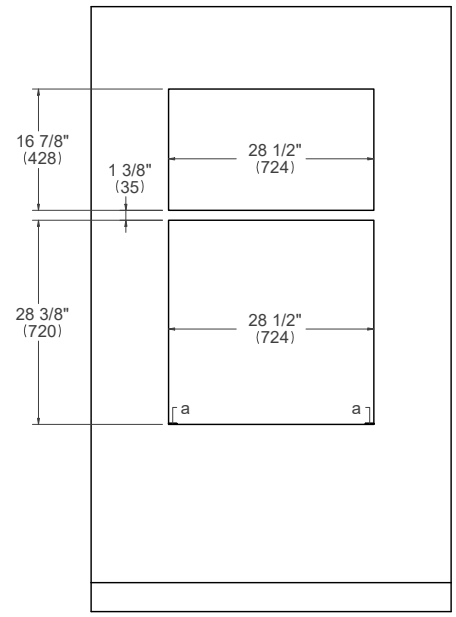

(a) Spacers - Included with appliance

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Microwave +
30" Convection Single Oven
Flush installation non vented




MO30STANE

PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV


TOP VIEW

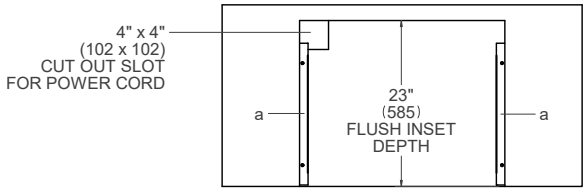

SIDE VIEW

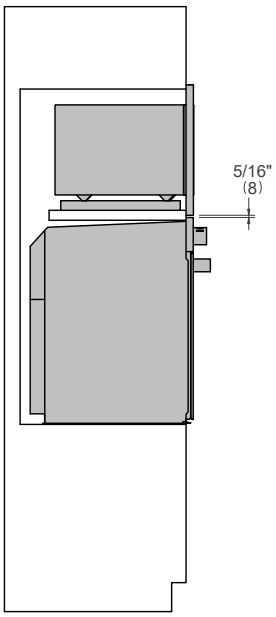


FRONT VIEW

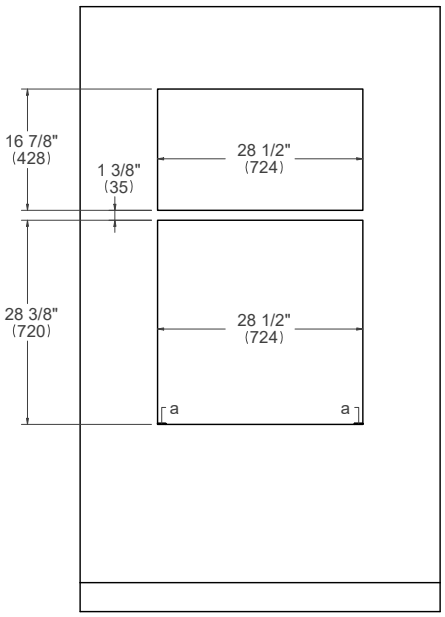

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30” Microwave +
30” Convection Single Oven
Flush installation vented




MO30STANE

PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV


TOP VIEW

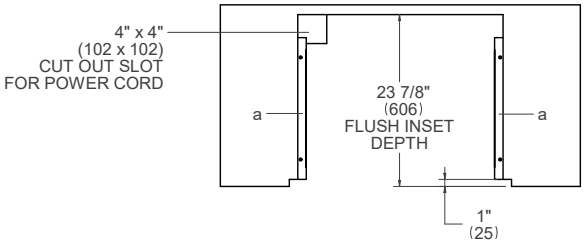

SIDE VIEW

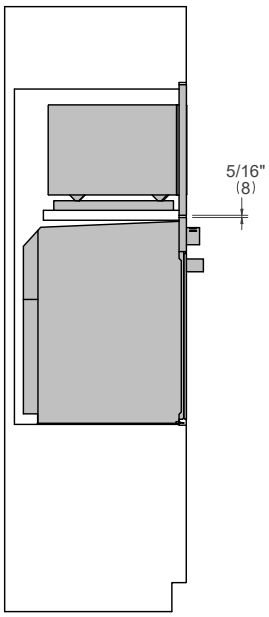

FRONT VIEW

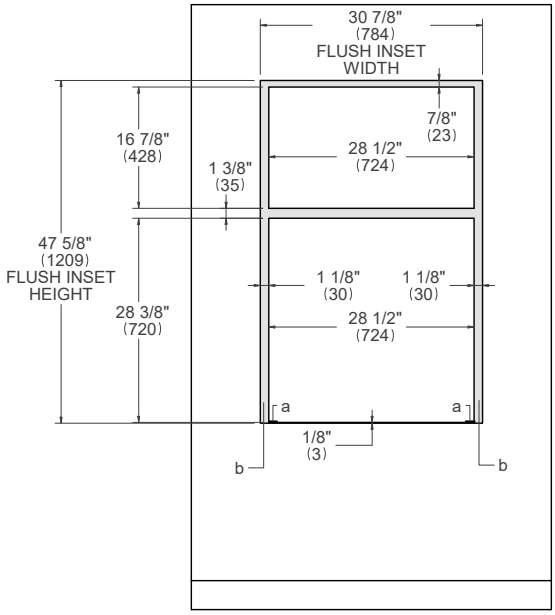


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30” Convection Single Oven + 30” Warming Drawer


Proud installation




PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV

PROF30WDEX
MAST30WDEX


TOP VIEW

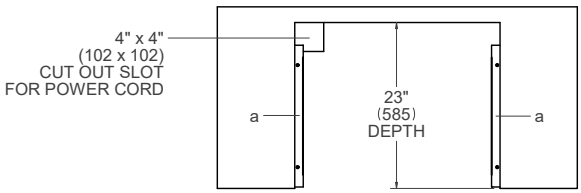

SIDE VIEW

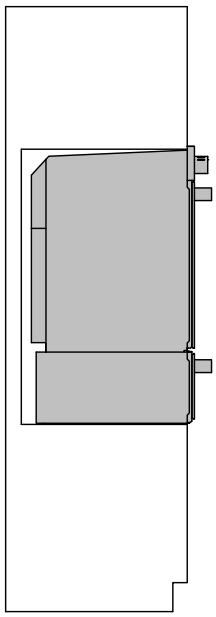

FRONT VIEW

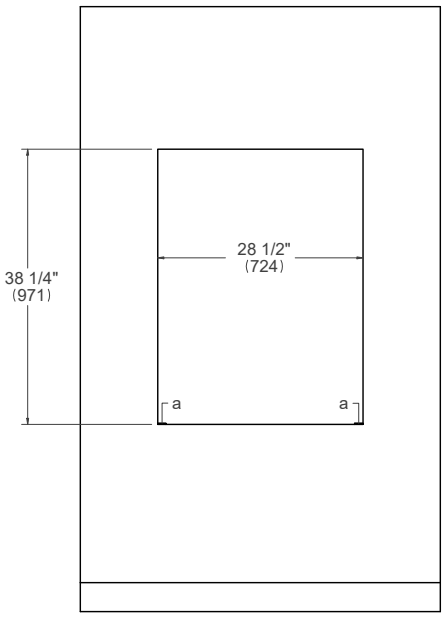


(a) Spacers - Included with appliance

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Single Oven + 30" Warming Drawer


Flush installation non vented




PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV

PROF30WDEX
MAST30WDEX


TOP VIEW

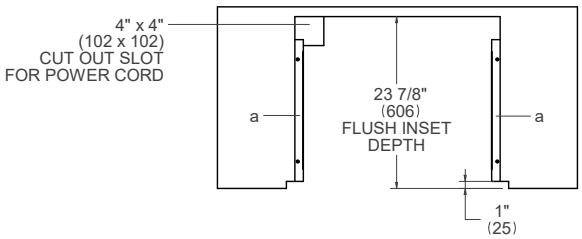

SIDE VIEW

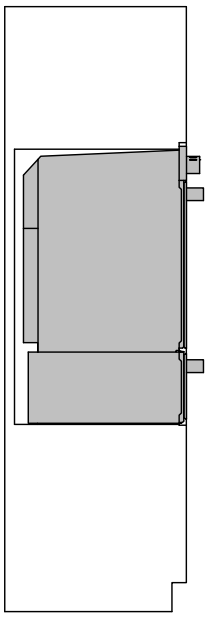

FRONT VIEW

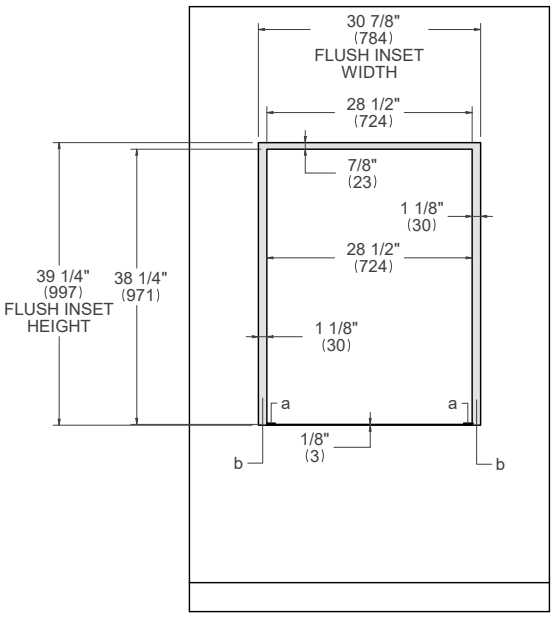


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30” Convection Single Oven + 30” Warming Drawer


Flush installation vented




PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV

PROF30WDEX
MAST30WDEX


TOP VIEW

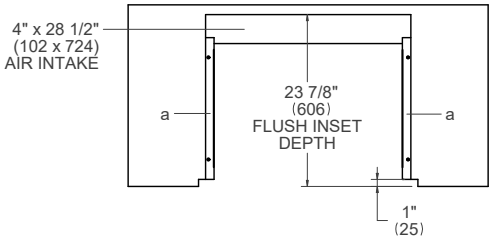

SIDE VIEW

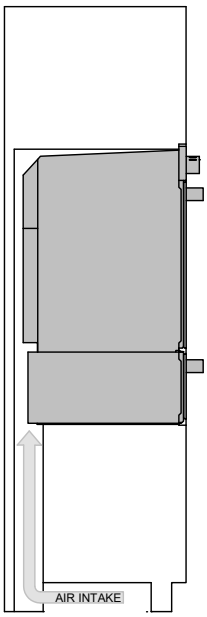

FRONT VIEW

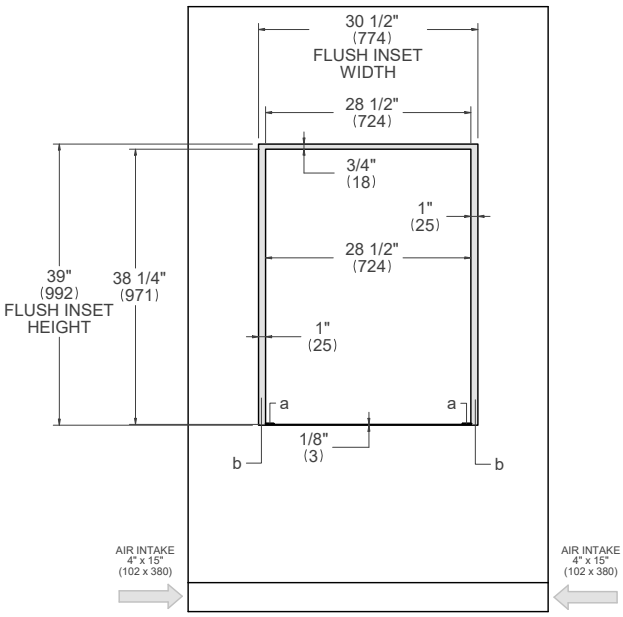


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30” Convection Double Oven + 30” Warming Drawer

Proud installation




PROF30FDEXT
PROF30FDEXV
MAST30FDEXT
MAST30FDEXV
PROF30WDEX
MAST30WDEX


TOP VIEW

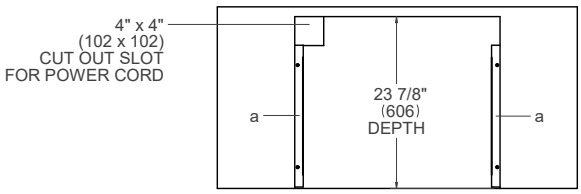

SIDE VIEW

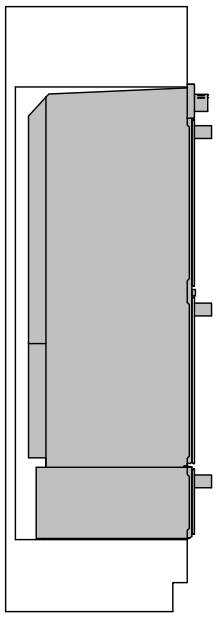

FRONT VIEW

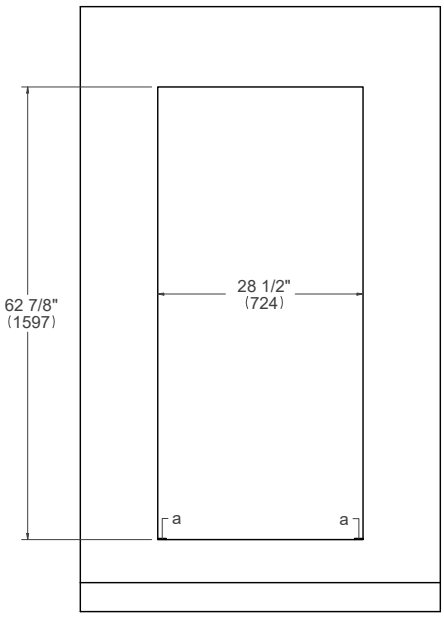


(a) Spacers - Parts of standard equipment

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30” Convection Double Oven + 30” Warming Drawer


Flush installation




PROF30FDEXT
PROF30FDEXV
MAST30FDEXT
MAST30FDEXV

PROF30WDEX
MAST30WDEX


TOP VIEW

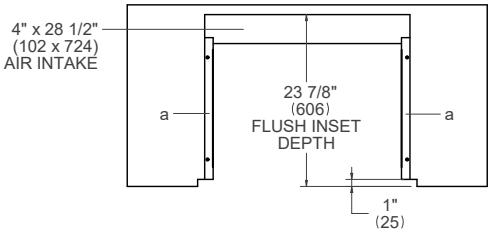

SIDE VIEW

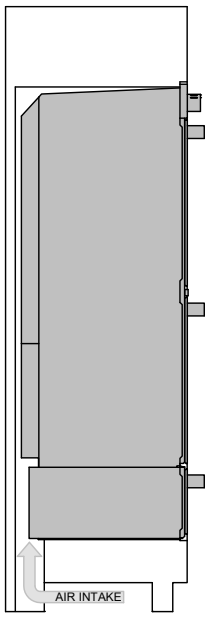


FRONT VIEW

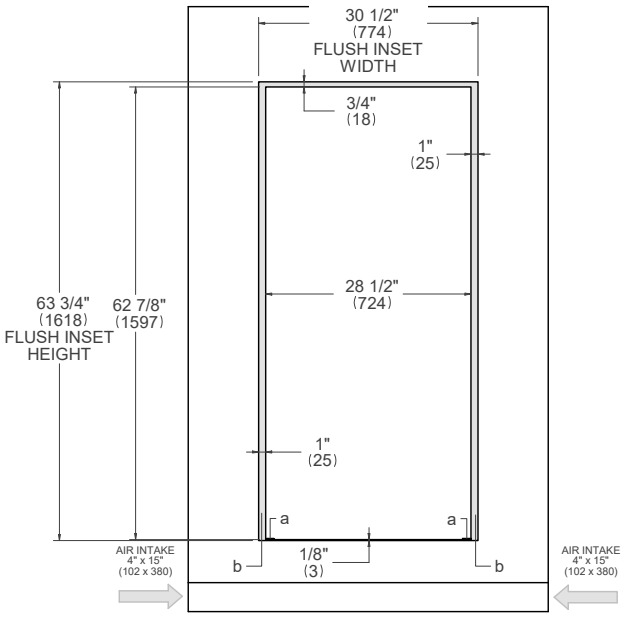

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24” Specialty Oven +
24” Convection Single Oven
Proud installation




PROF24SOEX
PROF24FSEXV


TOP VIEW

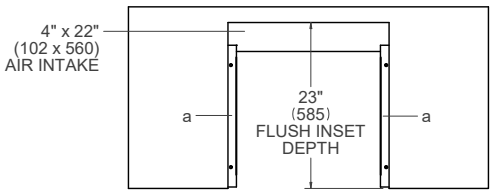

SIDE VIEW

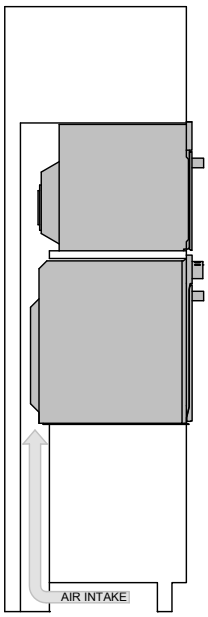


FRONT VIEW

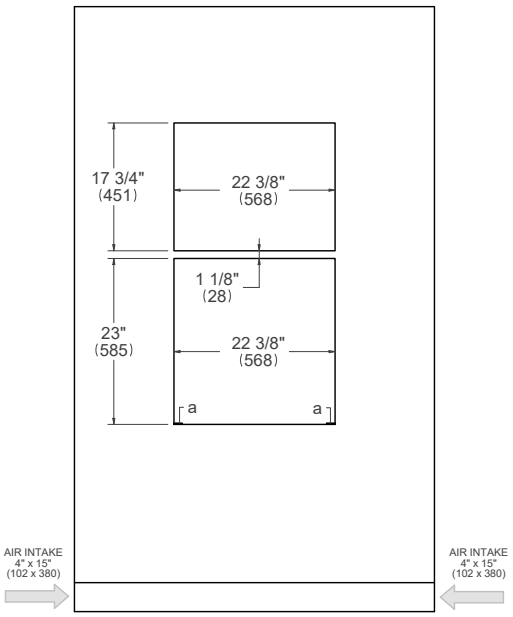

(a) Spacers - Included with appliance


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Specialty Oven +
24" Convection Single Oven
Flush installation




PROF24SOEX
PROF24FSEXV


TOP VIEW

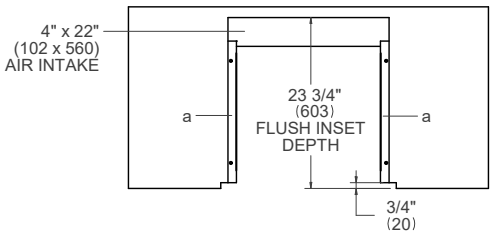

SIDE VIEW

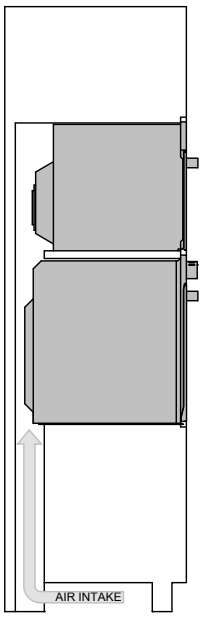

FRONT VIEW

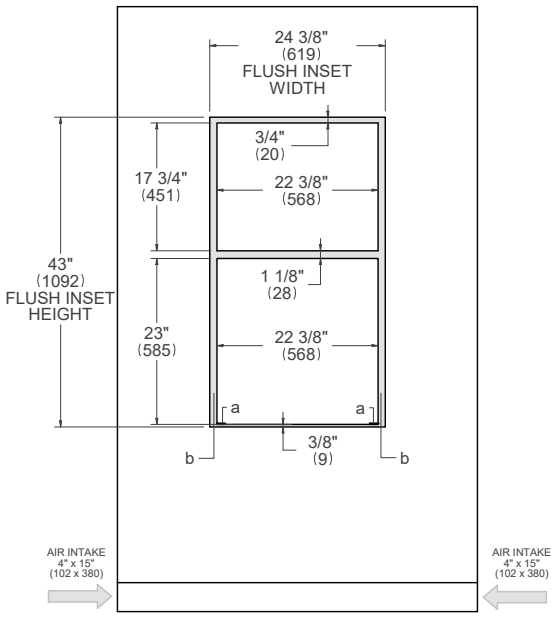


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


Side by Side
30” Convection Single Oven +
30” Specialty Oven +
30” Warming Drawer

Proud installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX
PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV
PROF30WDEX
MAST30WDEX


TOP VIEW

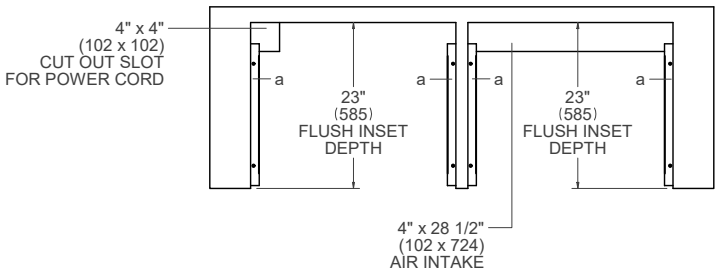


LEFT CABINET VIEW

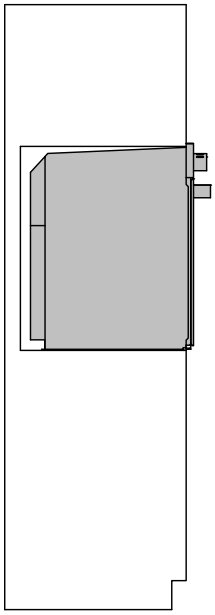

RIGHT CABINET VIEW

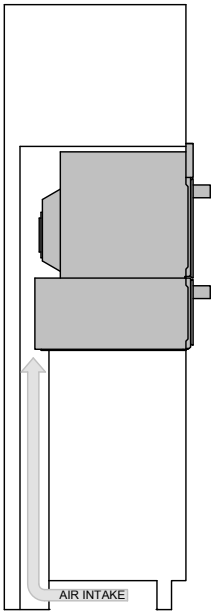

FRONT VIEW

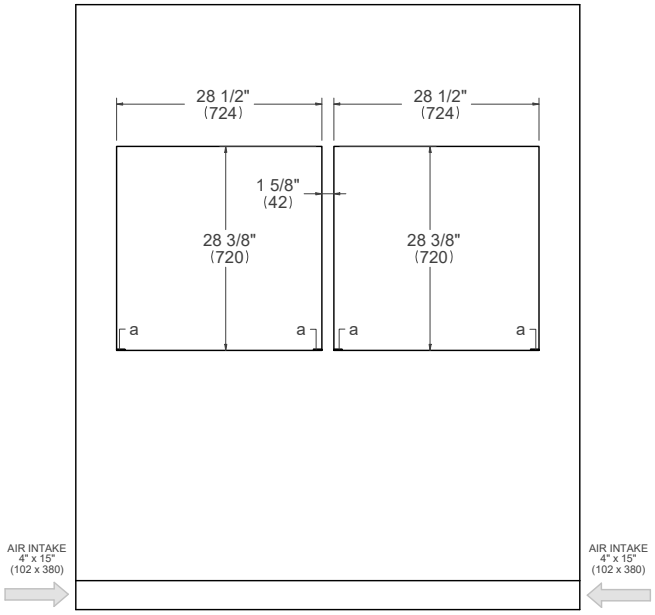


(a) Spacers - Included with appliance

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

Side by Side
30” Convection Single Oven +
30” Specialty Oven +
30” Warming Drawer

Flush installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX


PROF30FSEXT
PROF30FSEXV
MAST30FSEXT
MAST30FSEXV

PROF30WDEX
MAST30WDEX


TOP VIEW

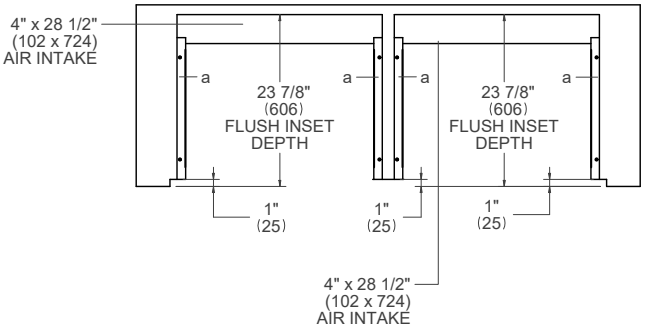


LEFT CABINET VIEW

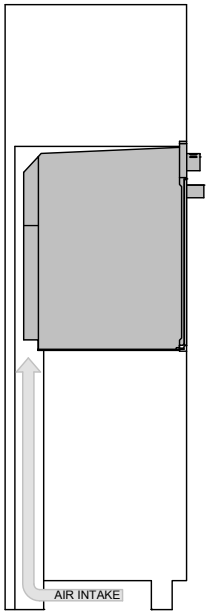

RIGHT CABINET VIEW

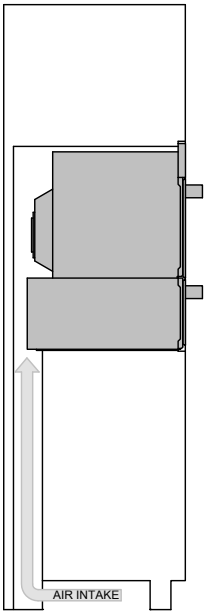

FRONT VIEW

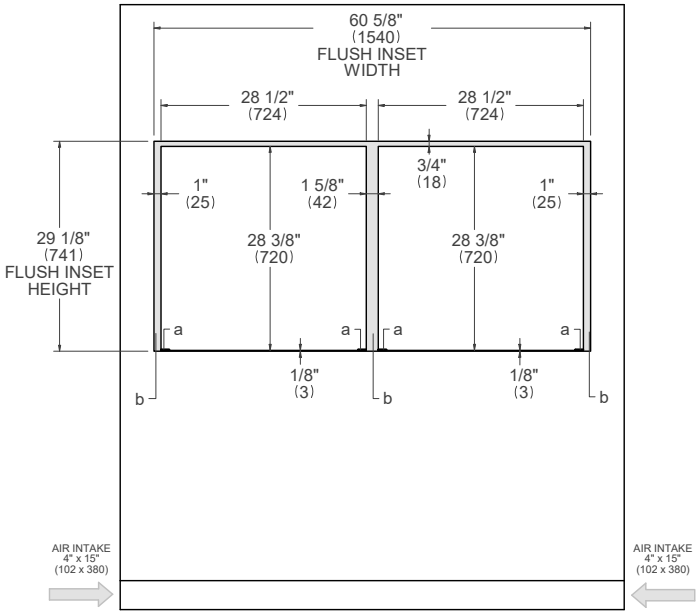


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Convection Oven + 36" Drop-in Cooktop

Flush installation non vented




PROF366QBXT MAST366QBXT PROF30FSEXT MAST30FSEXT
PROF365QBXT MAST365QBXT PROF30FSEXV MAST30FSEXV
PROF365QXE MAST365QXE


TOP VIEW – COOKTOP DETAIL

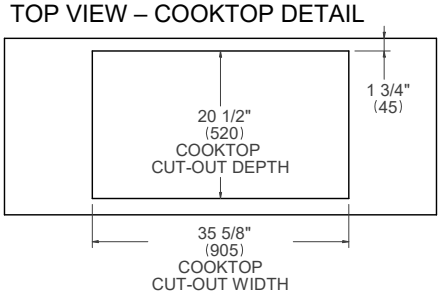


TOP VIEW – OVEN DETAIL

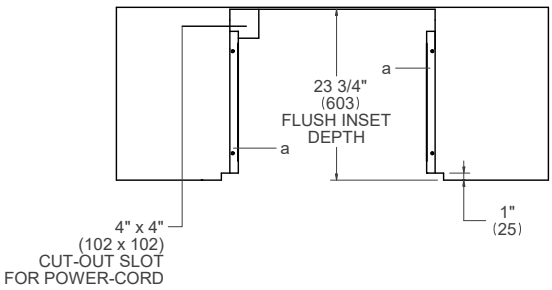

SIDE VIEW

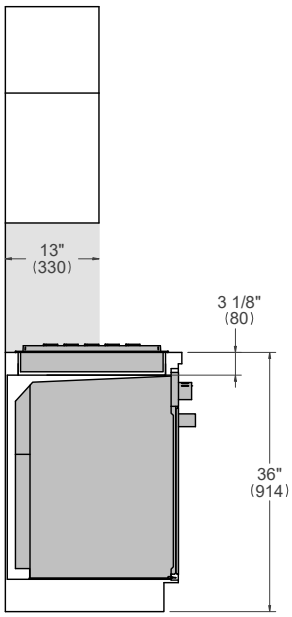

FRONT VIEW

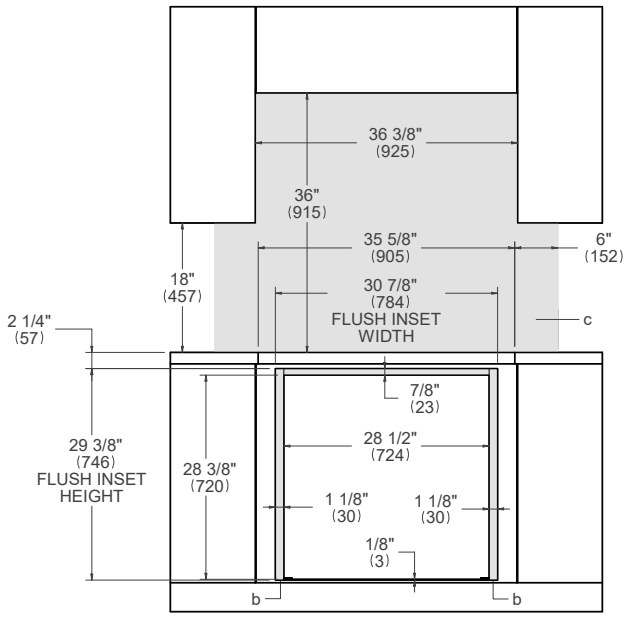


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Convection Oven + 36" Drop-in Cooktop

Flush installation vented




PROF366QBXT MAST366QBXT PROF30FSEXT MAST30FSEXT
PROF365QBXT MAST365QBXT PROF30FSEXV MAST30FSEXV
PROF365QXE MAST365QXE


TOP VIEW – COOKTOP DETAIL

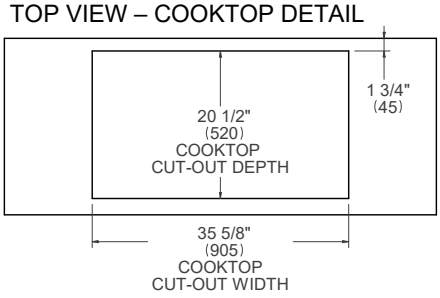


TOP VIEW – OVEN DETAIL

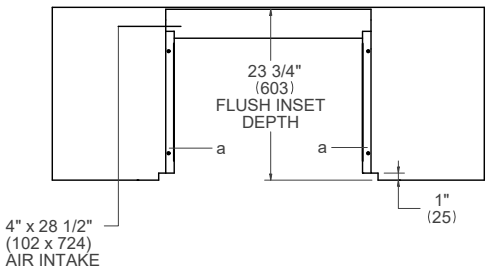

SIDE VIEW

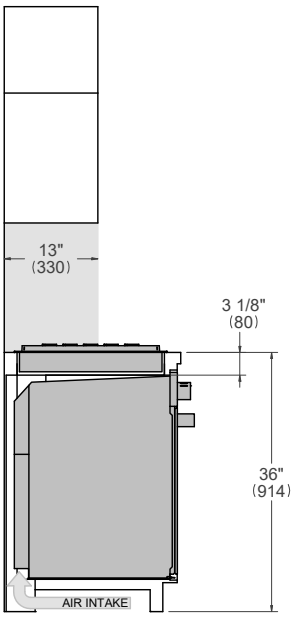

FRONT VIEW

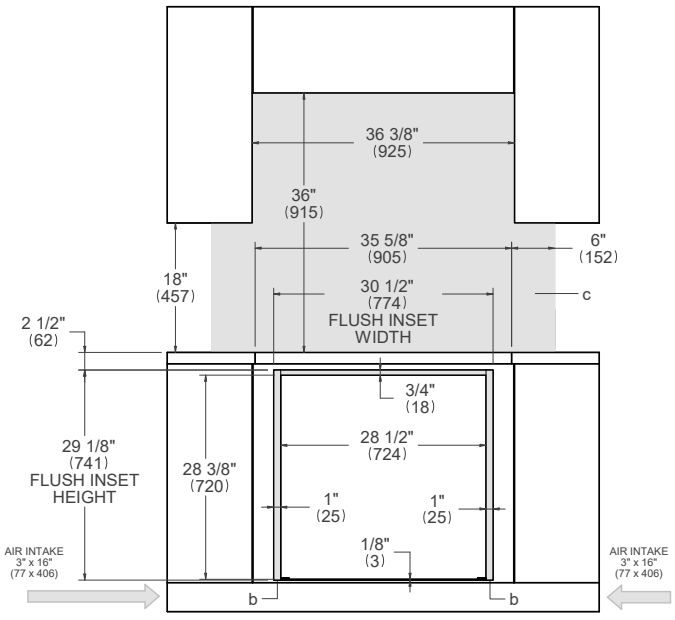


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 30" Drop-in Cooktop

Flush installation non vented




PRO304QBXT
PROF304QXE
MAST304QBXT
MAST304QXE


PROF30FSEXT
PROF30FSEXV

MAST30FSEXT
MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

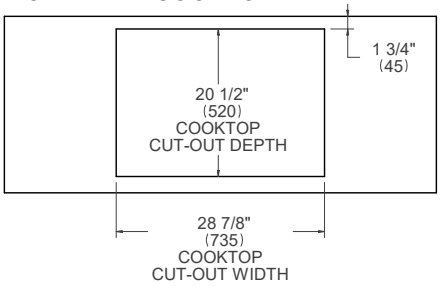


TOP VIEW – OVEN DETAIL

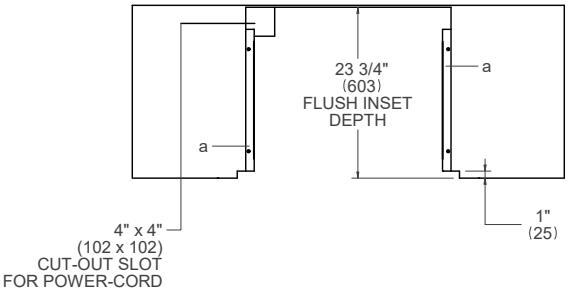

SIDE VIEW

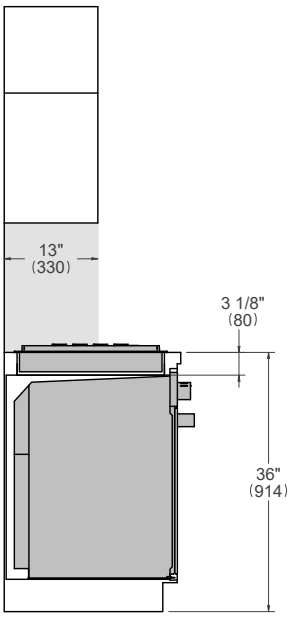

FRONT VIEW

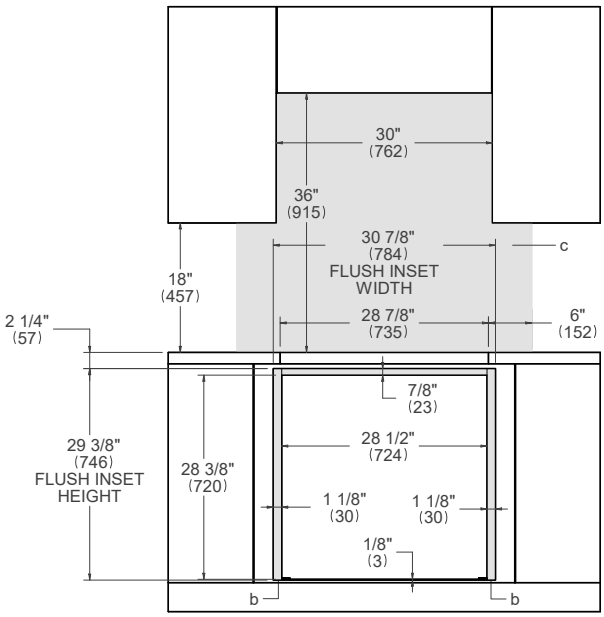


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 30" Drop-in Cooktop

Flush installation vented




PRO304QBXT
PROF304QXE
MAST304QBXT
MAST304QXE


PROF30FSEXT
PROF30FSEXV

MAST30FSEXT
MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

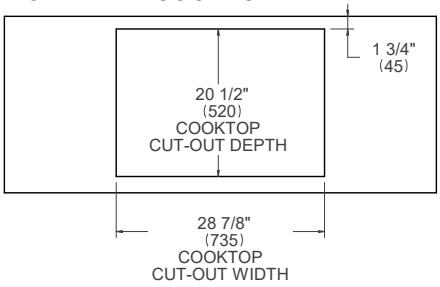


TOP VIEW – OVEN DETAIL

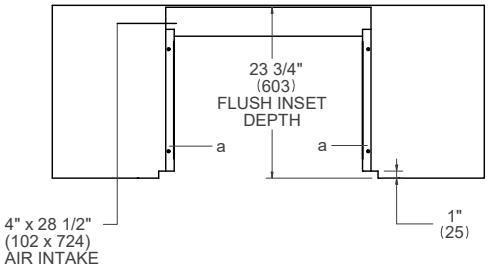

SIDE VIEW

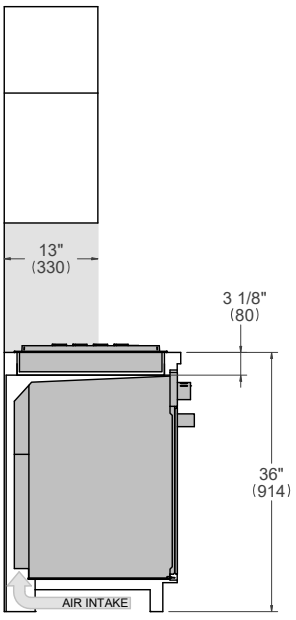

FRONT VIEW

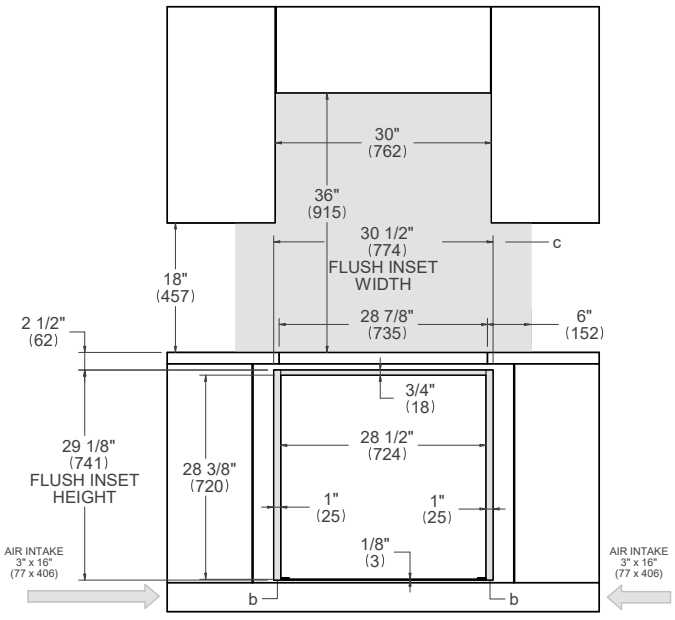


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Convection Oven + 36" Cooktop XV

Flush installation non vented




PROF365CTV PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

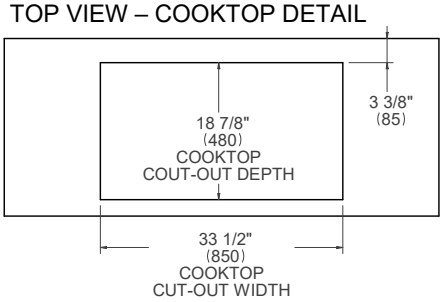


TOP VIEW – OVEN DETAIL

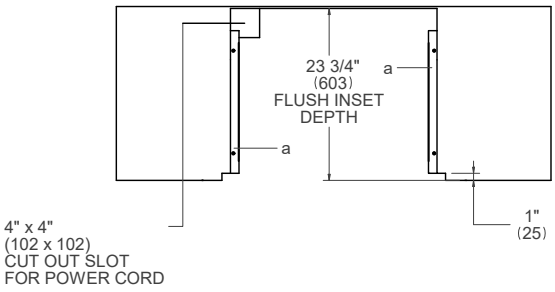

SIDE VIEW

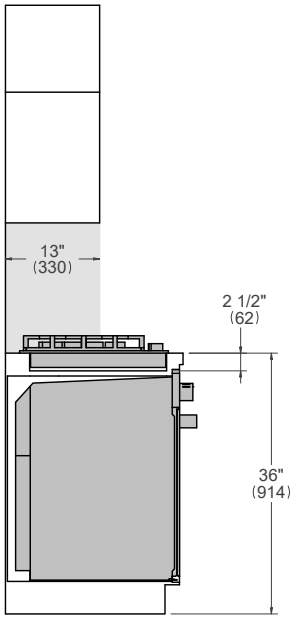

FRONT VIEW

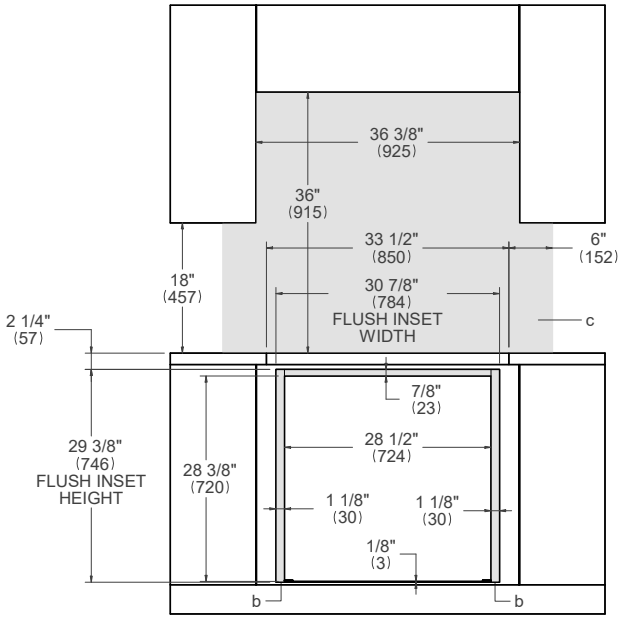


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Convection Oven + 36" Cooktop XV

Flush installation vented




PROF365CTV PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

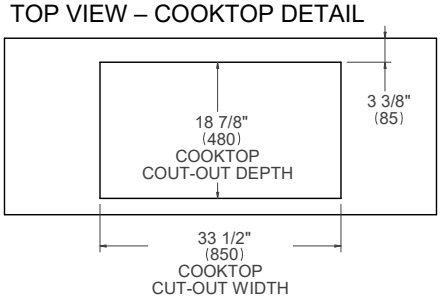


TOP VIEW – OVEN DETAIL

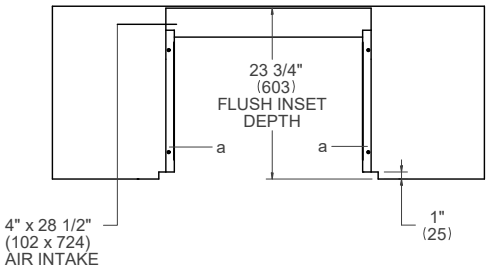

SIDE VIEW

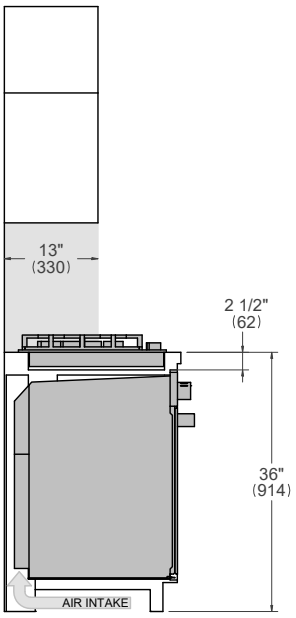

FRONT VIEW

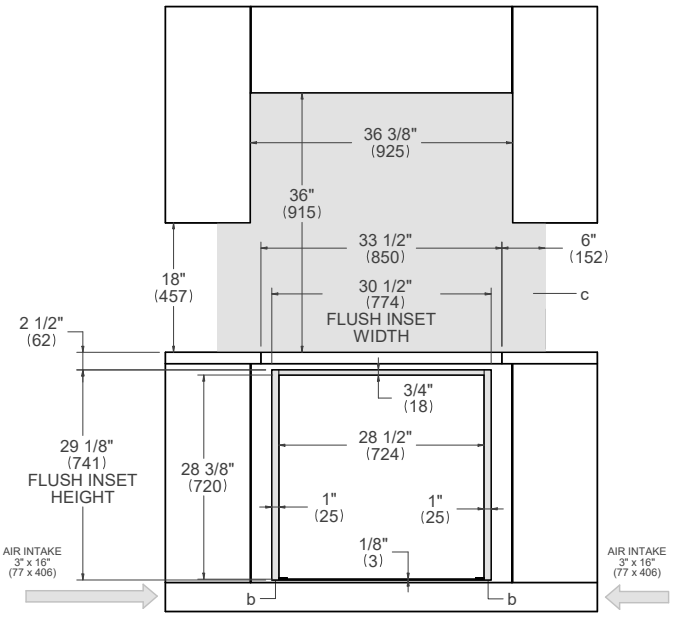


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Convection Oven + 30" Cooktop XV

Flush installation non vented




PROF305CTXV PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

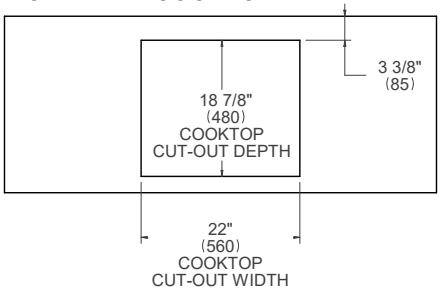


TOP VIEW – OVEN DETAIL

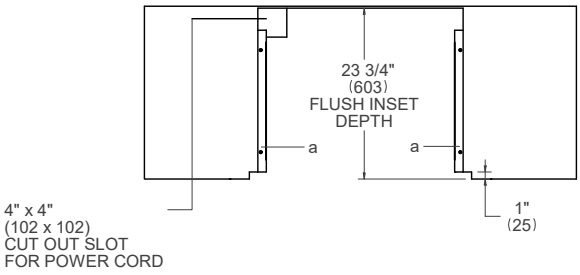

SIDE VIEW

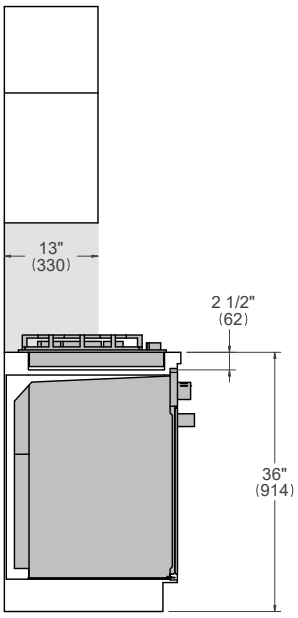

FRONT VIEW

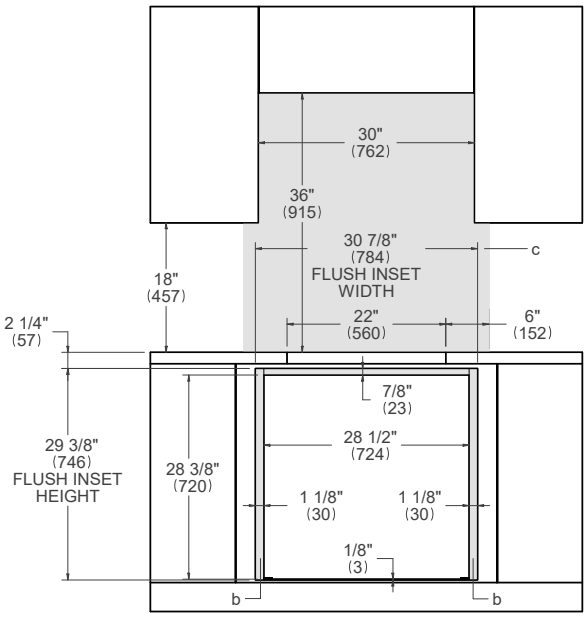


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Convection Oven + 30" Cooktop XV

Flush installation vented




PROF305CTXV PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

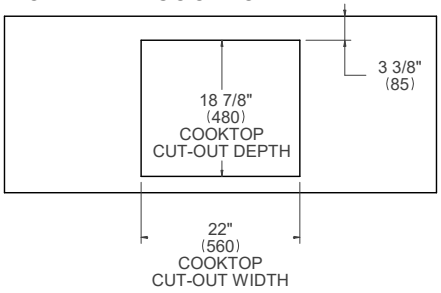


TOP VIEW – OVEN DETAIL

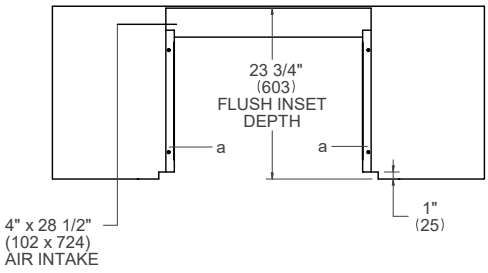

SIDE VIEW

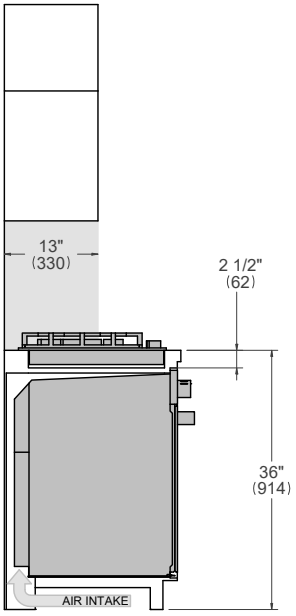

FRONT VIEW

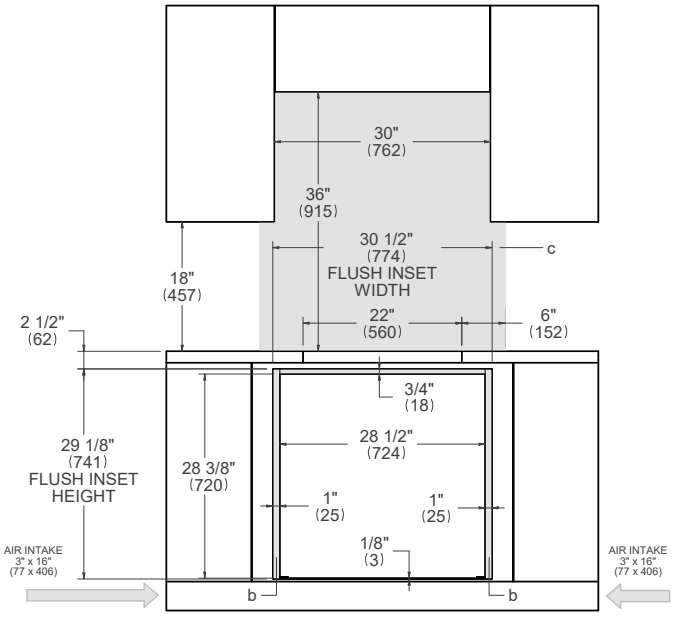


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 36" Induction Cooktop


Flush installation non vented




P365IAE

PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

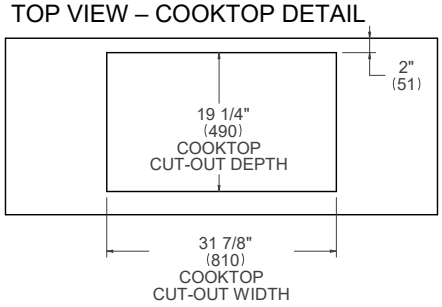


TOP VIEW – OVEN DETAIL

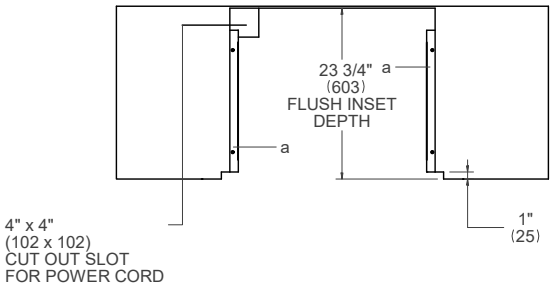

SIDE VIEW

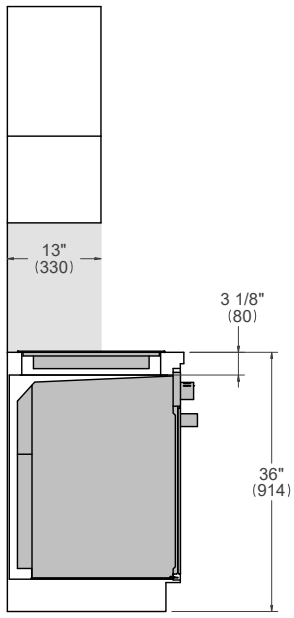

FRONT VIEW

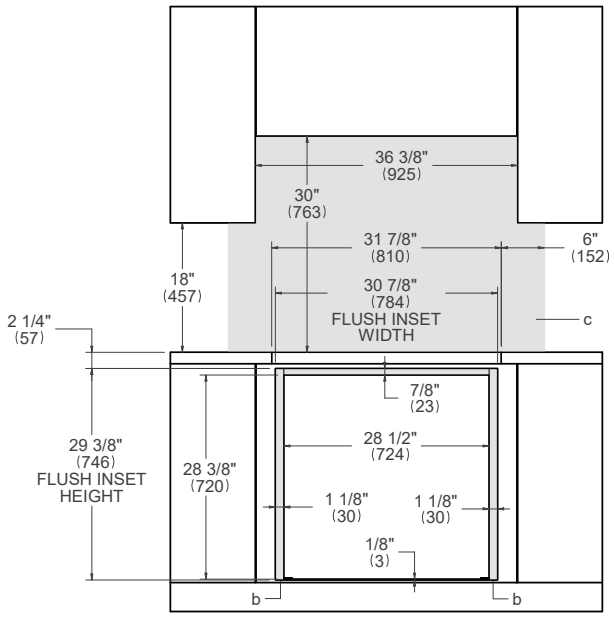


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 36" Induction Cooktop


Flush installation vented




P365IAE

PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

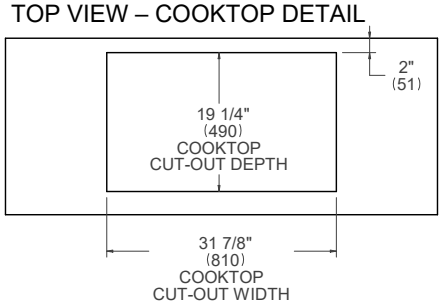


TOP VIEW – OVEN DETAIL

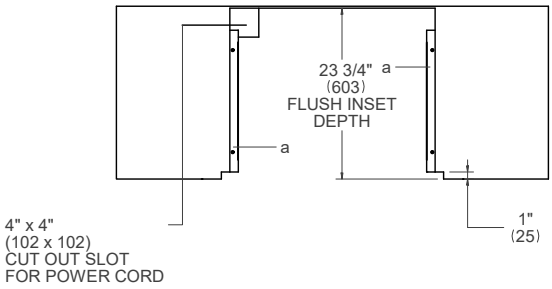

SIDE VIEW

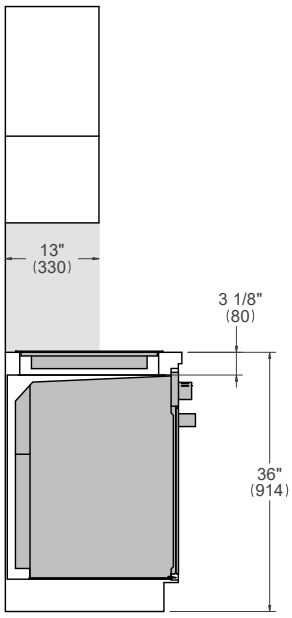

FRONT VIEW

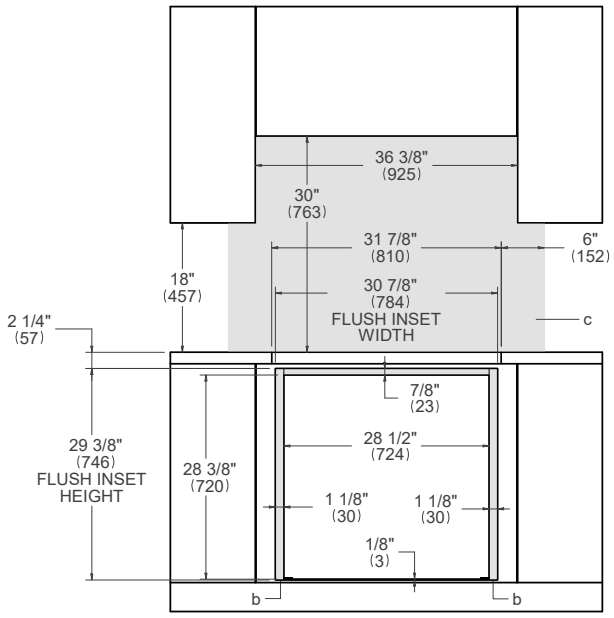


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 30" Induction Cooktop


Flush installation non vented




P304IAE

PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

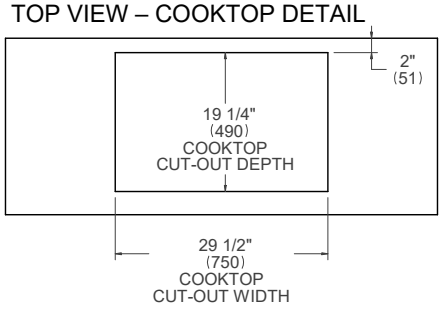


TOP VIEW – OVEN DETAIL

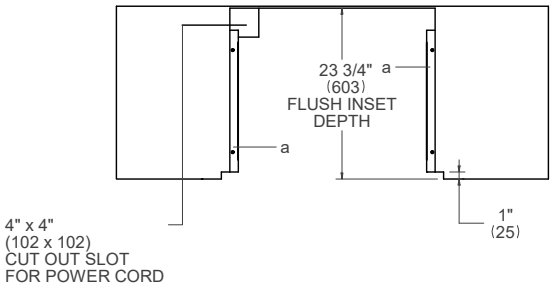

SIDE VIEW

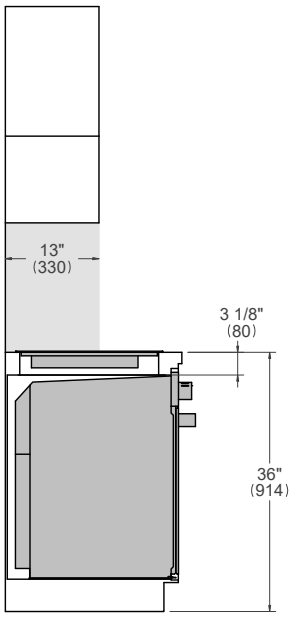

FRONT VIEW

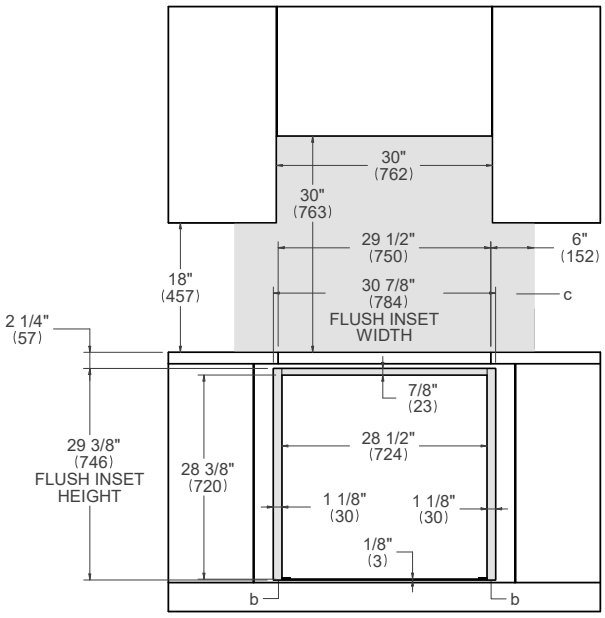


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 30" Induction Cooktop


Flush installation vented




P304IAE

PROF30FSEXT MAST30FSEXT
PROF30FSEXV MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

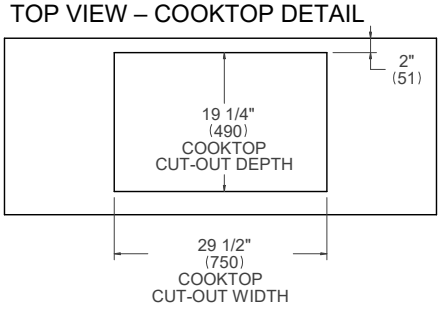


TOP VIEW – OVEN DETAIL

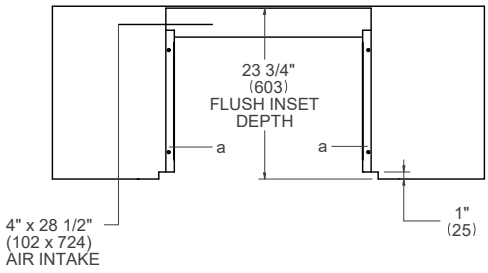

SIDE VIEW

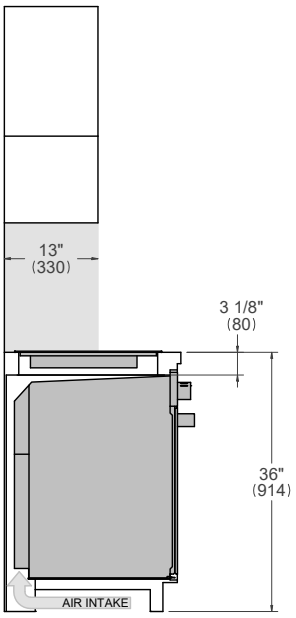

FRONT VIEW

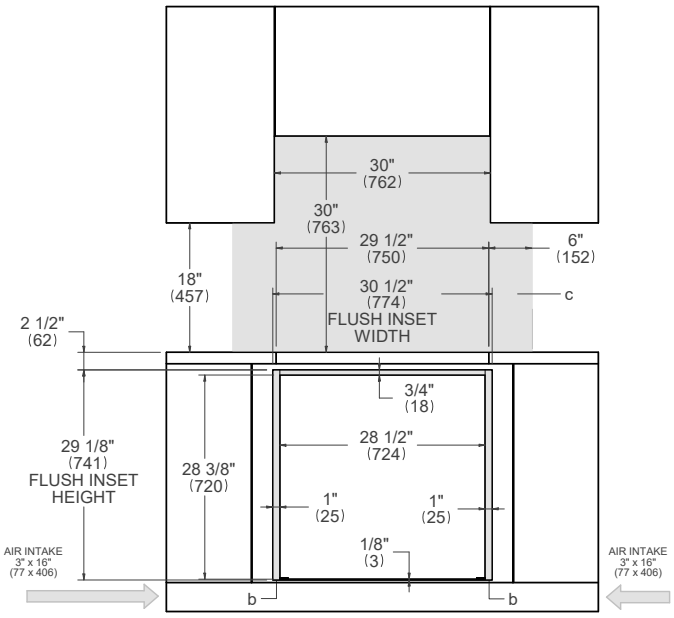


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Convection Oven + 30" Electric Ceramic Cooktop

Flush installation vented




PE304CER


PROF30FSEXT
PROF30FSEXV

MAST30FSEXT
MAST30FSEXV


TOP VIEW – COOKTOP DETAIL

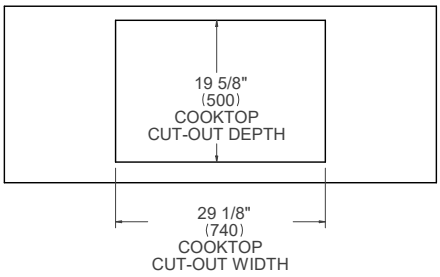


TOP VIEW – OVEN DETAIL

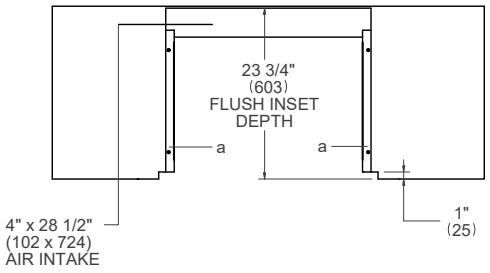

SIDE VIEW

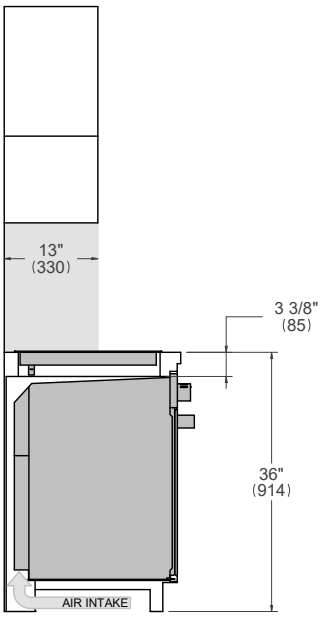

FRONT VIEW

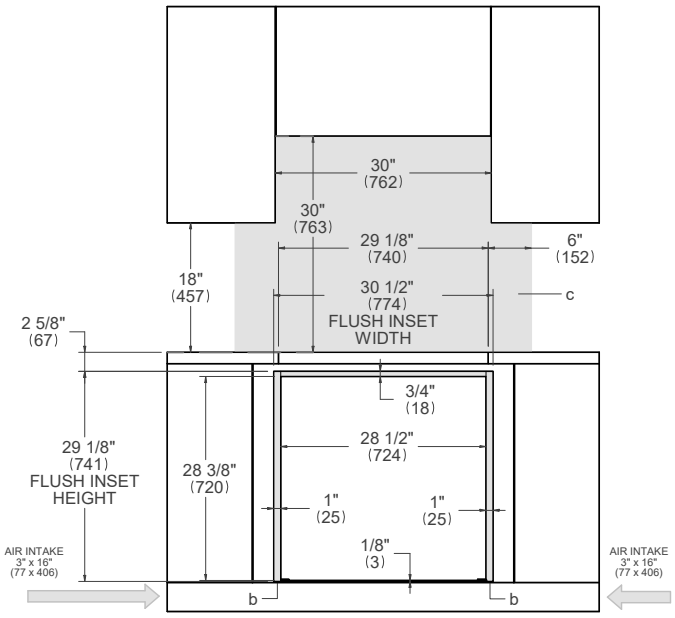


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Specialty Oven + 36" Drop-in Cooktop

Flush installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX


PROF366QBXT
PROF365QBXT
PRO365QXE

MAST366QBXT
MAST365QBXT
MAST365QXE


TOP VIEW – COOKTOP DETAIL

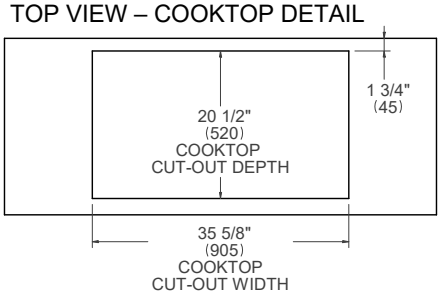


TOP VIEW – OVEN DETAIL

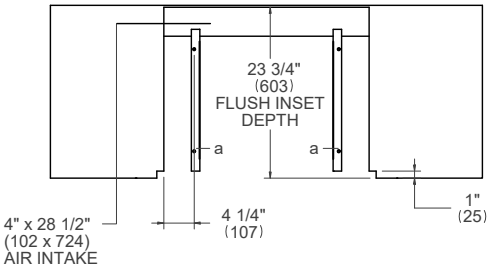

SIDE VIEW

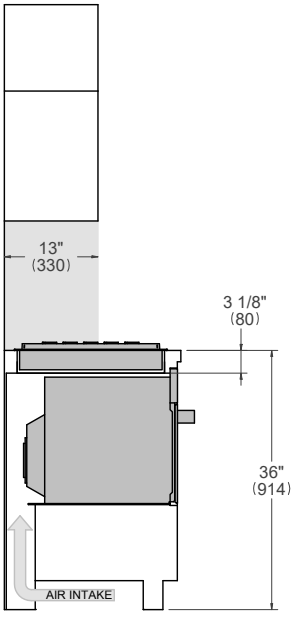

FRONT VIEW

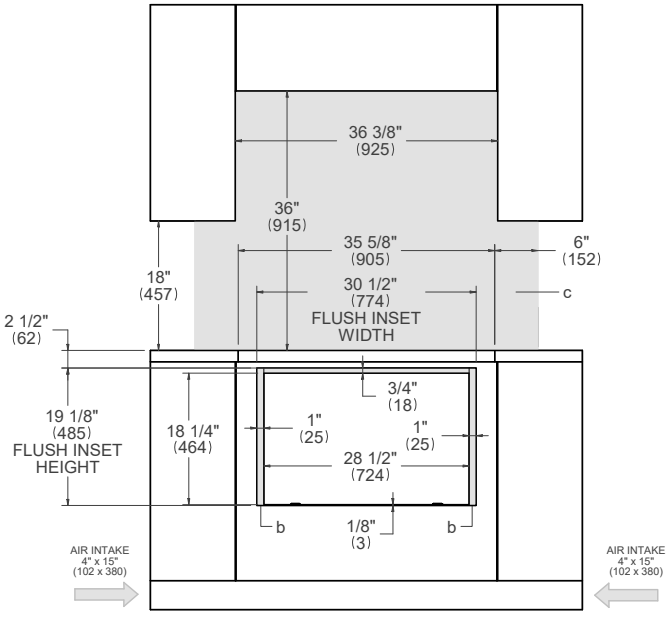


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Specialty Oven + 30" Drop-in Cooktop

Flush installation




PROF30SOEX PROF304QBXT
PROF30CSEX PROF304QXE
MAST30SOEX MAST304QBXT
MAST30CSEX MAST304QBXE


TOP VIEW – COOKTOP DETAIL

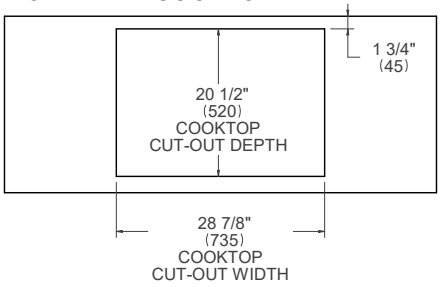


TOP VIEW – OVEN DETAIL

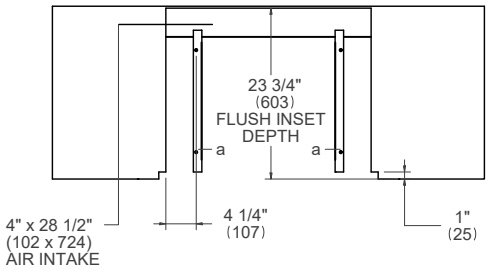

SIDE VIEW

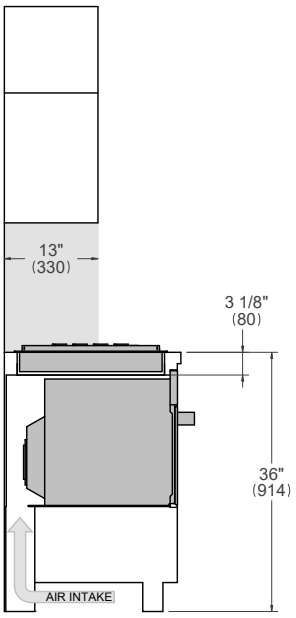

FRONT VIEW

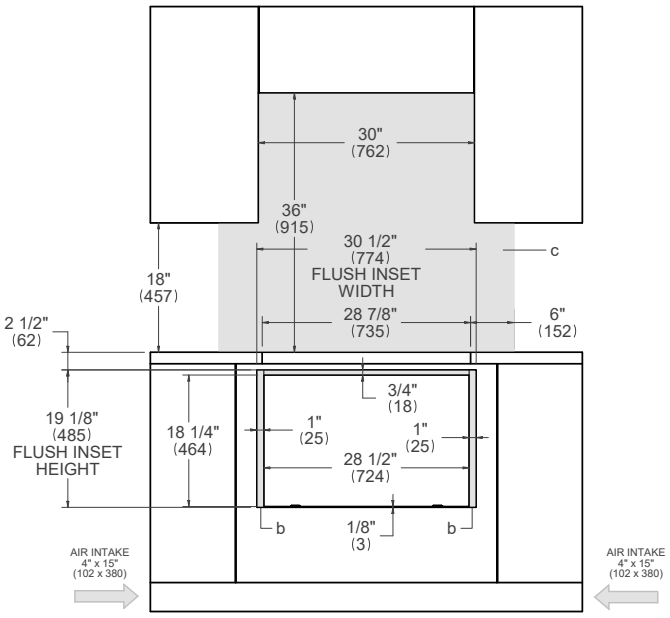


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Specialty Oven + 36" Cooktop XV


Flush installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX

PROF365CTXV


TOP VIEW – COOKTOP DETAIL

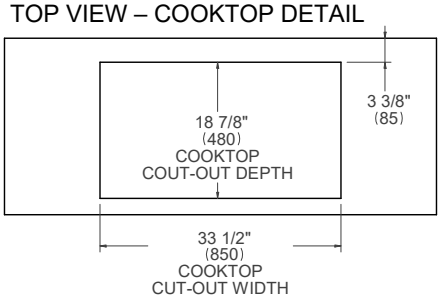


TOP VIEW – OVEN DETAIL

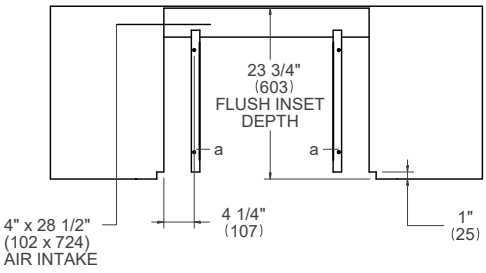

SIDE VIEW

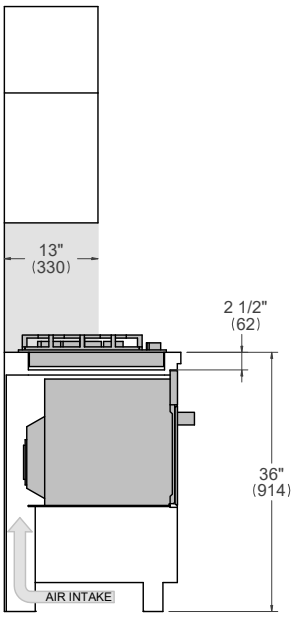

FRONT VIEW

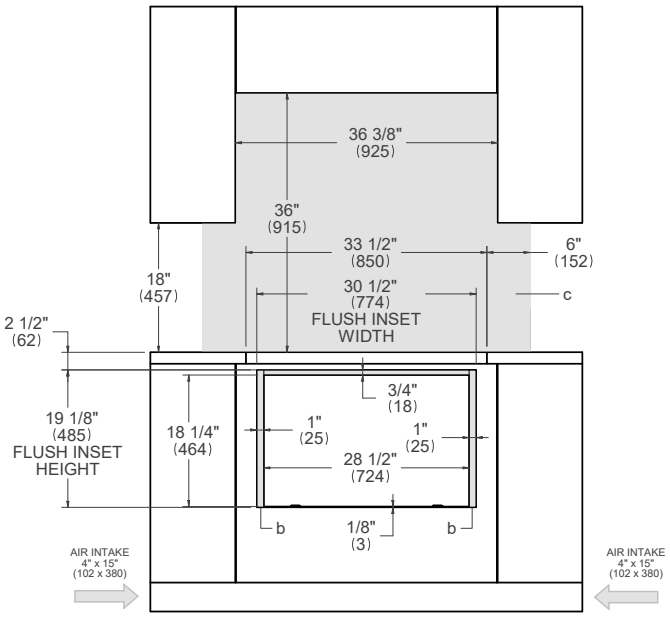


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

30" Specialty Oven + 30" Cooktop XV


Flush installation




PROF30SOEX
PROF30CSEX
MAST30SOEX
MAST30CSEX

PROF305CTXV


TOP VIEW – COOKTOP DETAIL

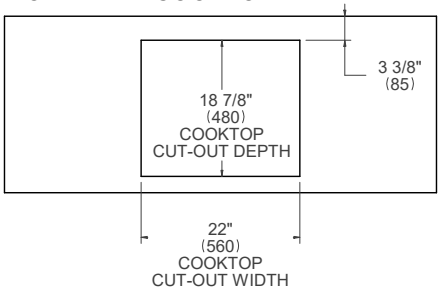


TOP VIEW – OVEN DETAIL

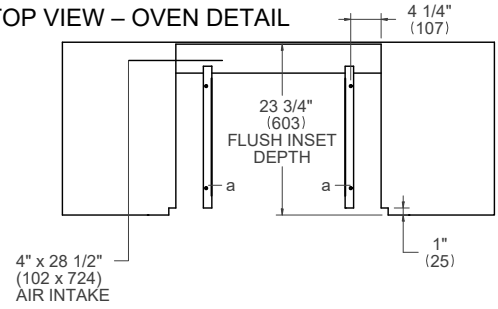

SIDE VIEW

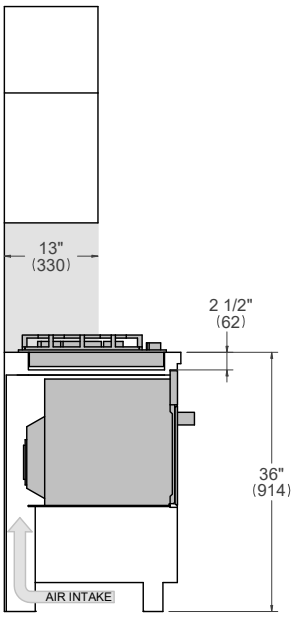

FRONT VIEW

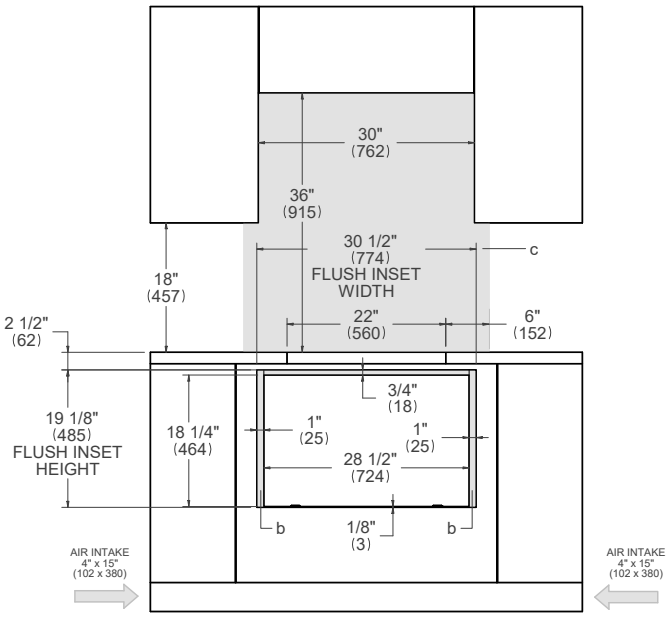


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Specialty Oven + 36" Induction Cooktop

Flush installation




PROF30SOEX P365IAE
PROF30CSEX
MAST30SOEX
MAST30CSEX


TOP VIEW – COOKTOP DETAIL

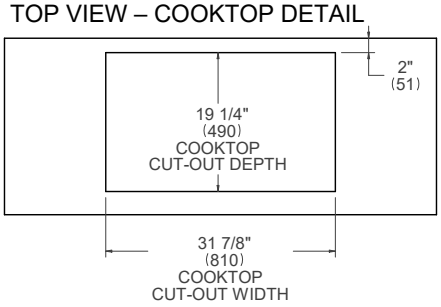


TOP VIEW – OVEN DETAIL

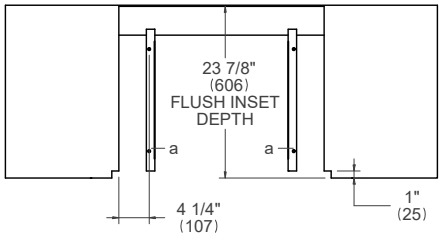

SIDE VIEW

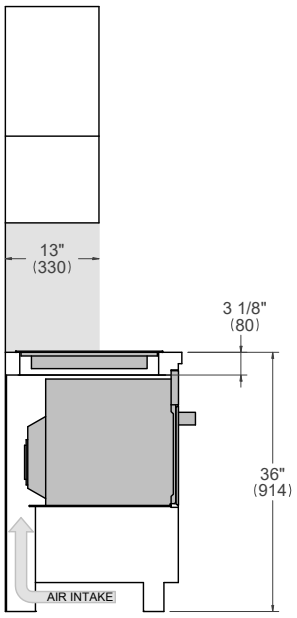

FRONT VIEW

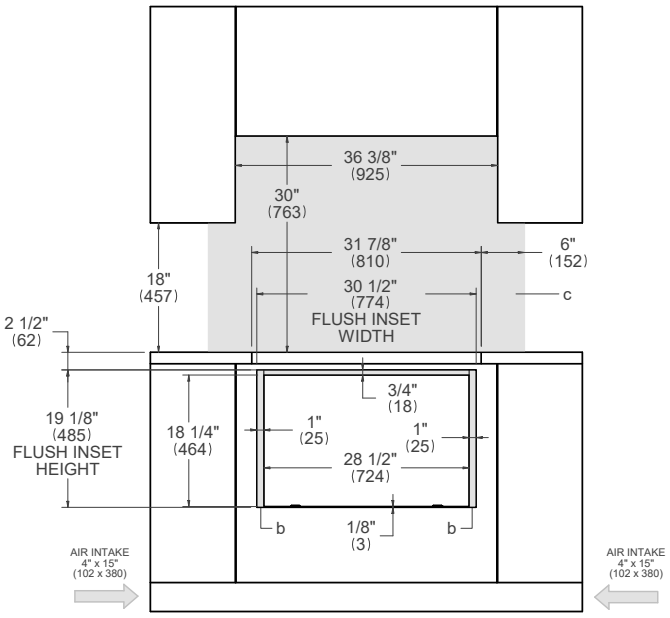


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


30" Specialty Oven + 30" Induction Cooktop

Flush installation




PROF30SOEX P304IAE
PROF30CSEX
MAST30SOEX
MAST30CSEX


TOP VIEW – COOKTOP DETAIL

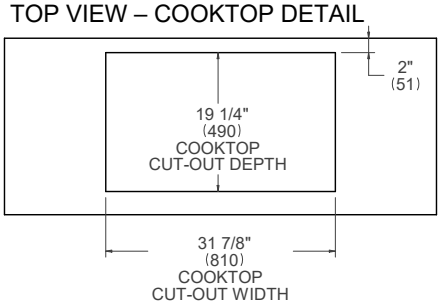


TOP VIEW – OVEN DETAIL

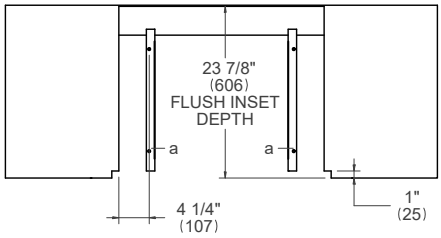

SIDE VIEW

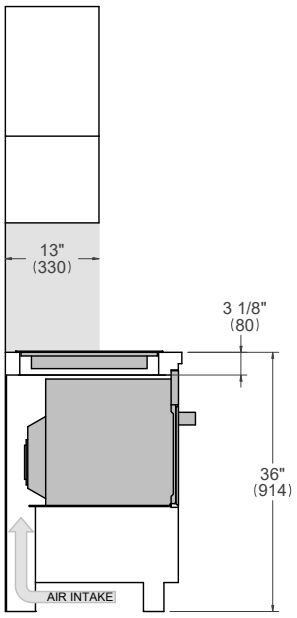

FRONT VIEW

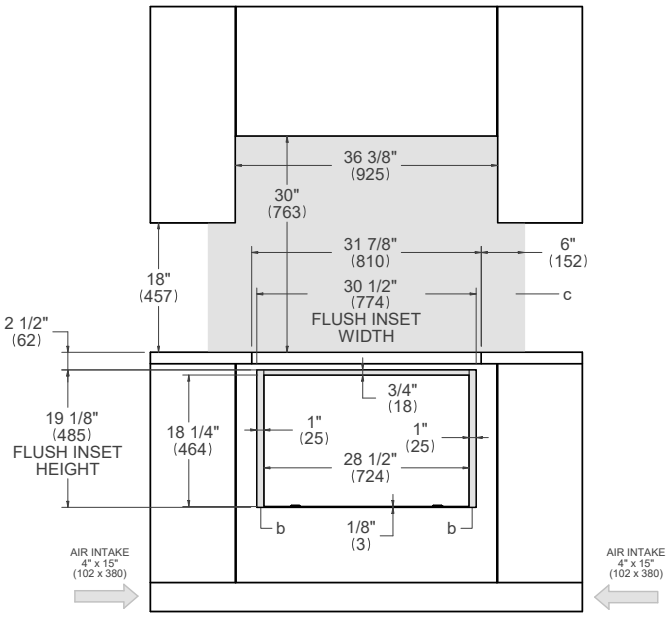


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Convection Oven + 36" Drop-in Cooktop

Flush installation




PROF24FSEXV


PROF366QBXT
PROF365QBXT
PRO365QXE

MAST366QBXT
MAST365QBXT
MAST365QXE


TOP VIEW – COOKTOP DETAIL

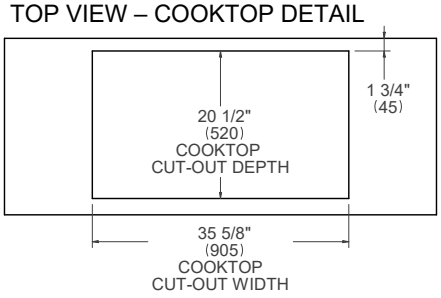


TOP VIEW – OVEN DETAIL

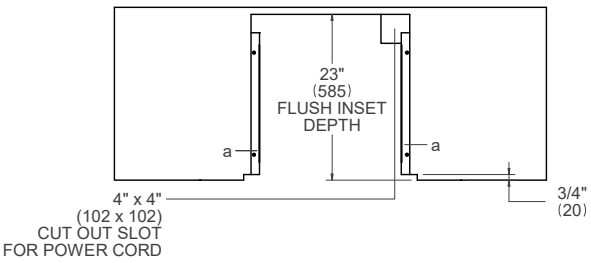

SIDE VIEW

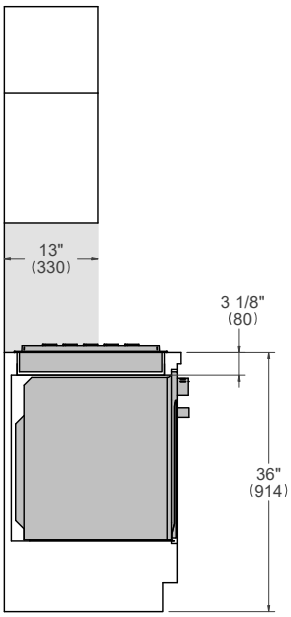

FRONT VIEW

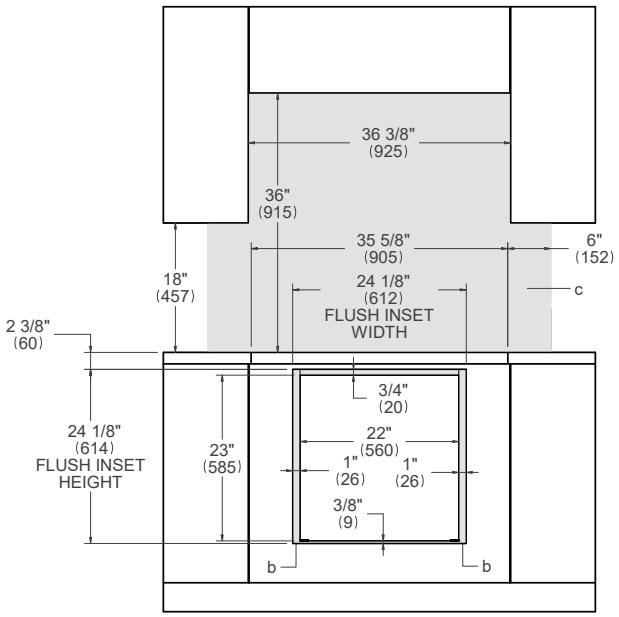


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24” Convection Oven + 30” Drop-in Cooktop


Flush installation




PROF24SOEX

PROF304QBXT
PROF304QXE
MAST304QBXT
MAST304QXE


TOP VIEW – COOKTOP DETAIL

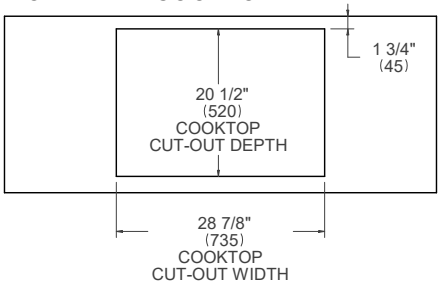


TOP VIEW – OVEN DETAIL

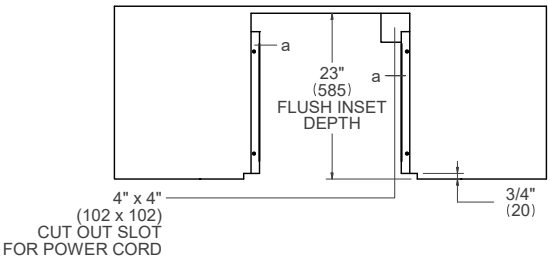

SIDE VIEW

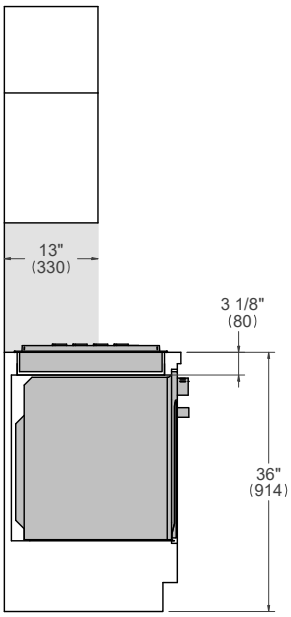

FRONT VIEW

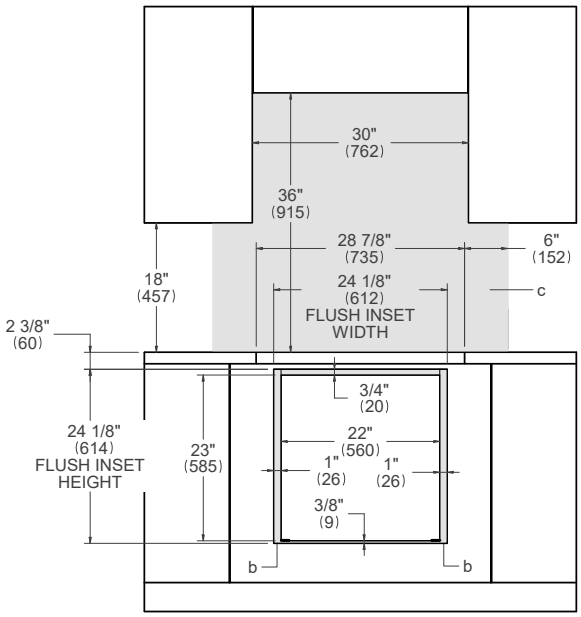


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Convection Oven + 36” Cooktop XV

Flush installation




PROF24FSEXV PROF365CTXV


TOP VIEW – COOKTOP DETAIL

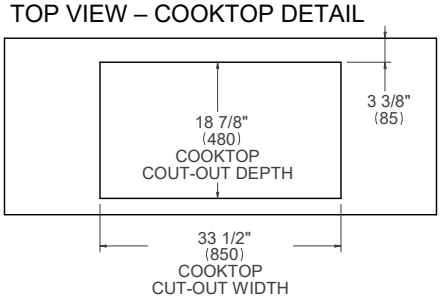


TOP VIEW – OVEN DETAIL

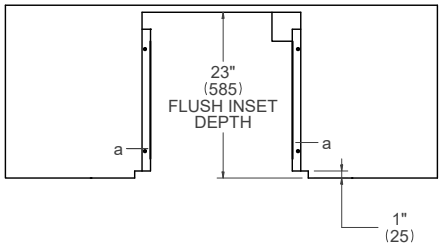

SIDE VIEW

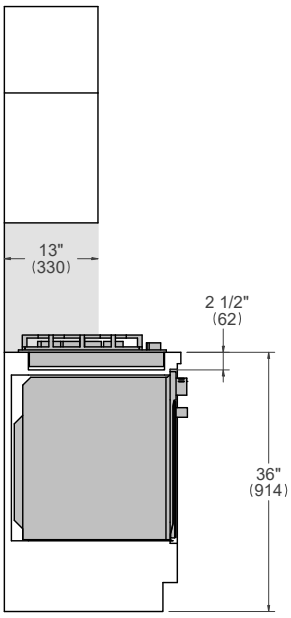

FRONT VIEW

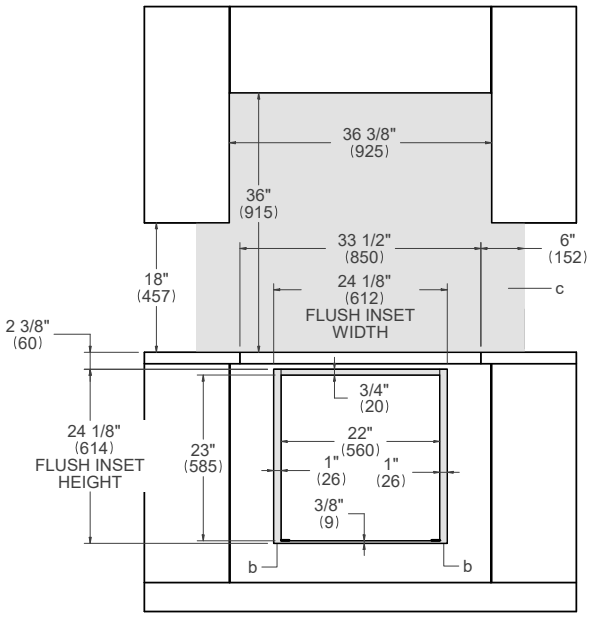


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Convection Oven + 30” Cooktop XV

Flush installation




PROF24FSEXV PROF305CTXV


TOP VIEW – COOKTOP DETAIL

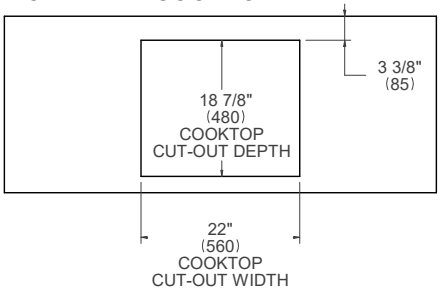


TOP VIEW – OVEN DETAIL

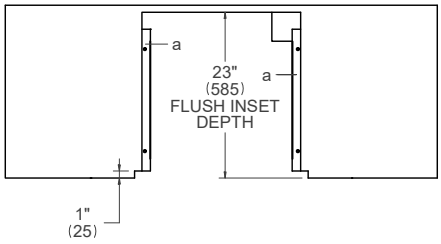

SIDE VIEW

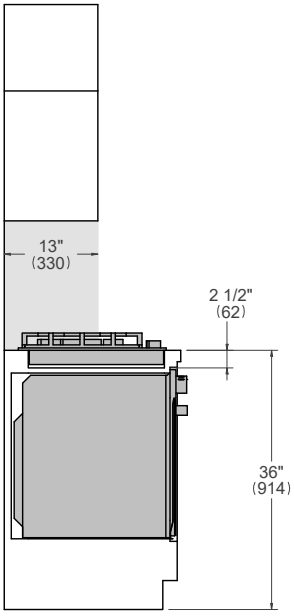

FRONT VIEW

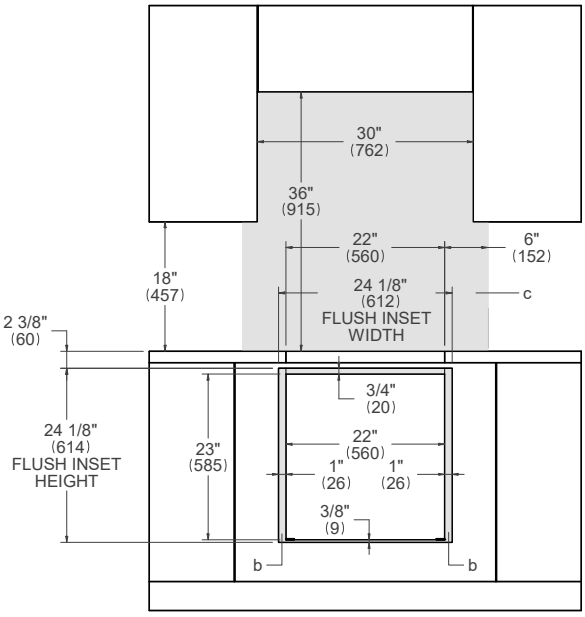


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Convection Oven + 24" Cooktop XV

Flush installation




PROF24FSEXV PROF244CTXV


TOP VIEW – COOKTOP DETAIL

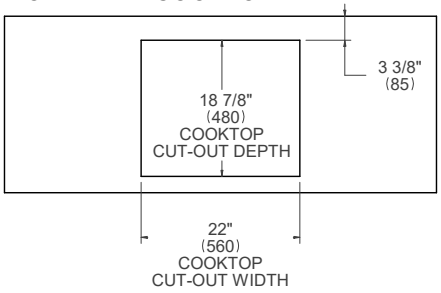


TOP VIEW – OVEN DETAIL

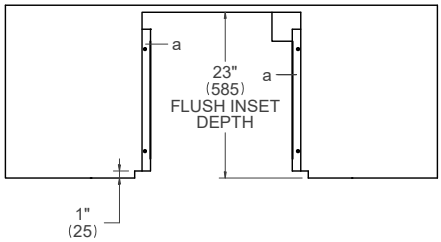

SIDE VIEW

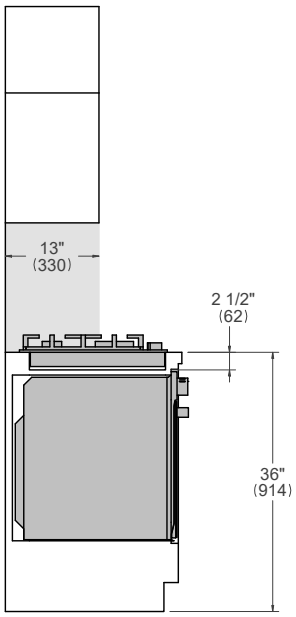

FRONT VIEW

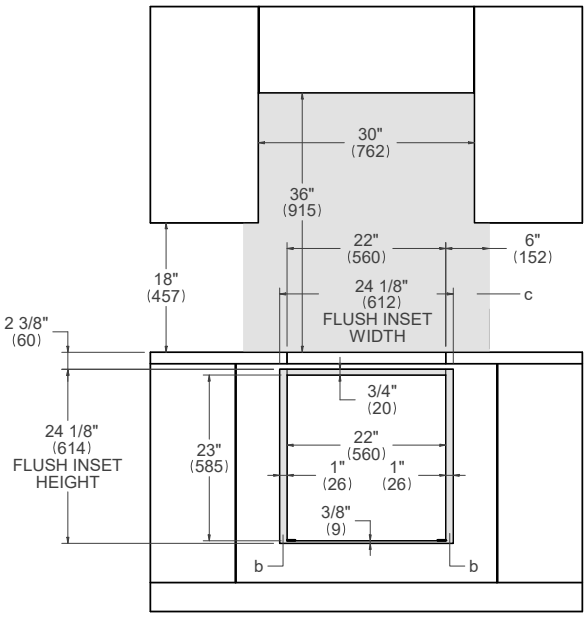


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Convection Oven + 36” Induction Cooktop

Flush installation




PROF24FSEXV P365IAE


TOP VIEW – COOKTOP DETAIL

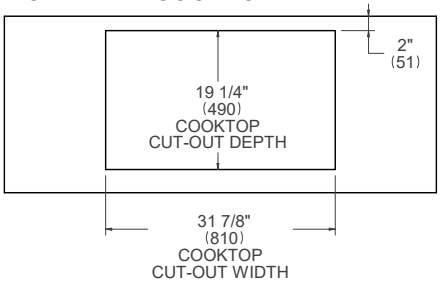


TOP VIEW – OVEN DETAIL

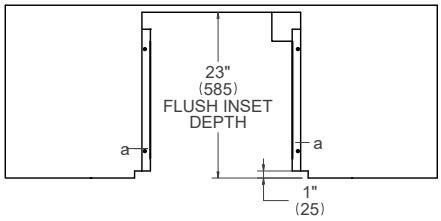

SIDE VIEW

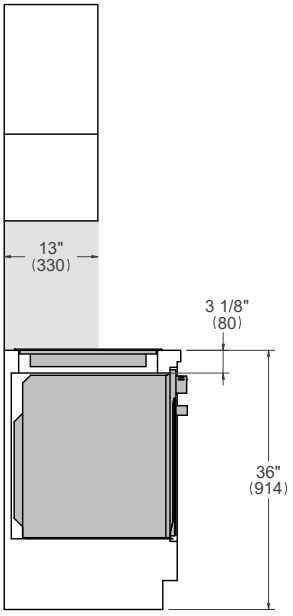

FRONT VIEW

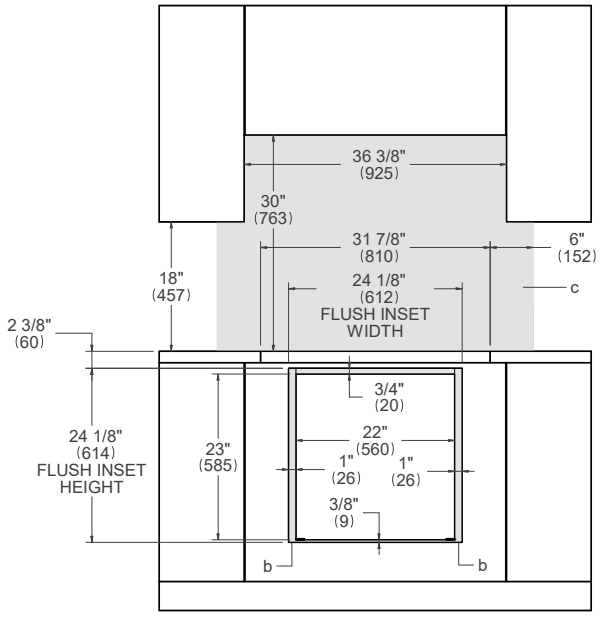


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Convection Oven + 30" Induction Cooktop

Flush installation




PROF24FSEXV P304IAE


TOP VIEW – COOKTOP DETAIL

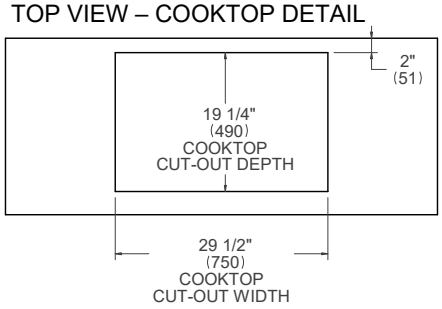


TOP VIEW – OVEN DETAIL

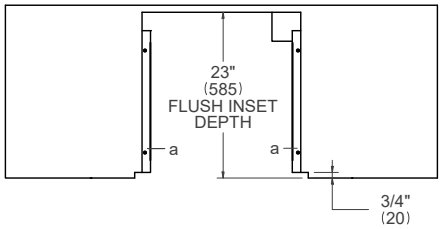

SIDE VIEW

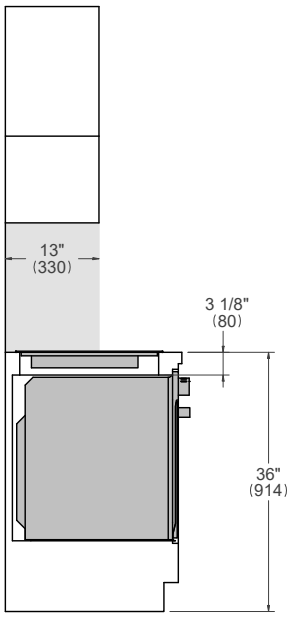

FRONT VIEW

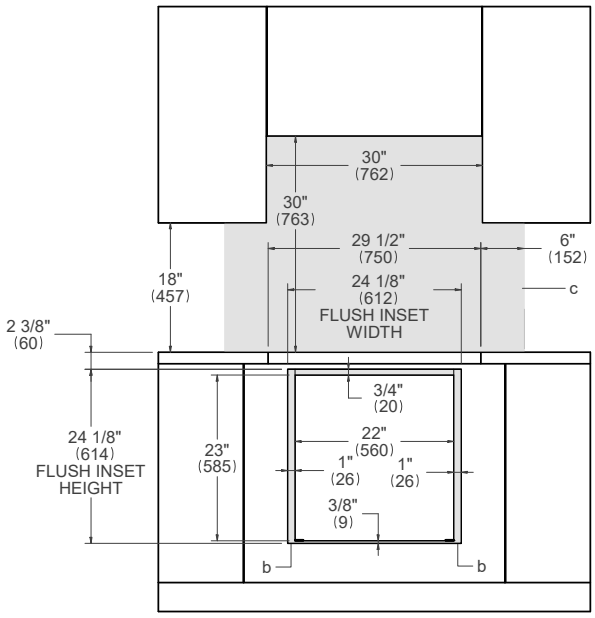


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Convection Oven + 30” Electric Ceramic Cooktop

Flush installation




PE304CER PROF24FSEXV


TOP VIEW – COOKTOP DETAIL

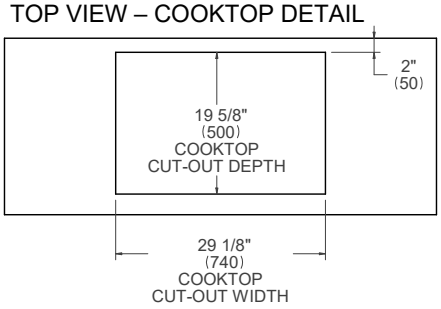


TOP VIEW – OVEN DETAIL

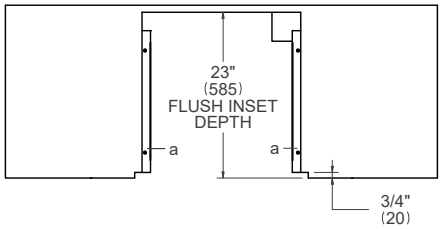

SIDE VIEW

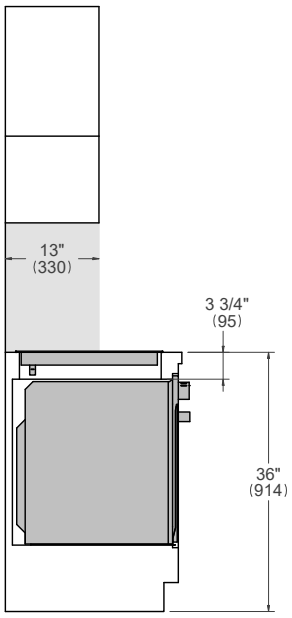


FRONT VIEW

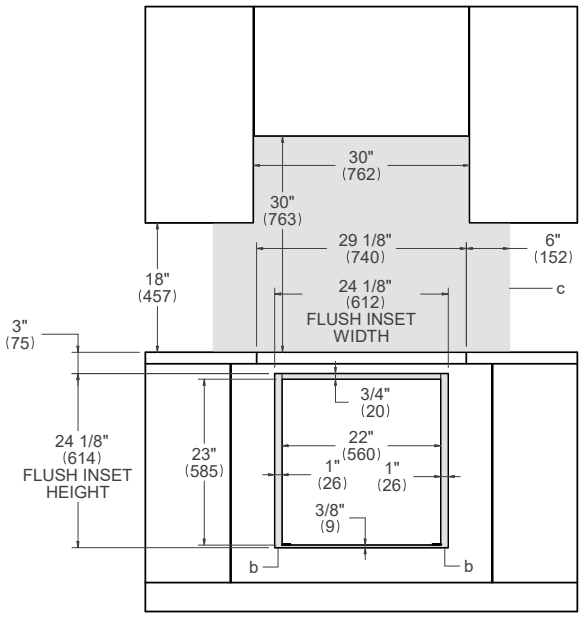

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Convection Oven +
24" Electric Ceramic Cooktop
Flush installation




PE244CER PROF24FSEXV


TOP VIEW – COOKTOP DETAIL

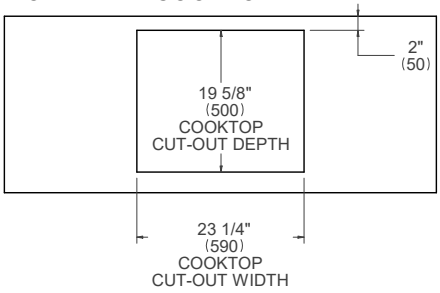


TOP VIEW – OVEN DETAIL

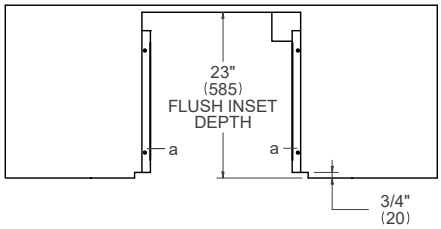

SIDE VIEW

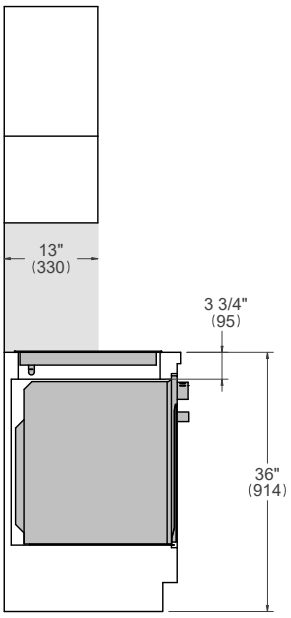

FRONT VIEW

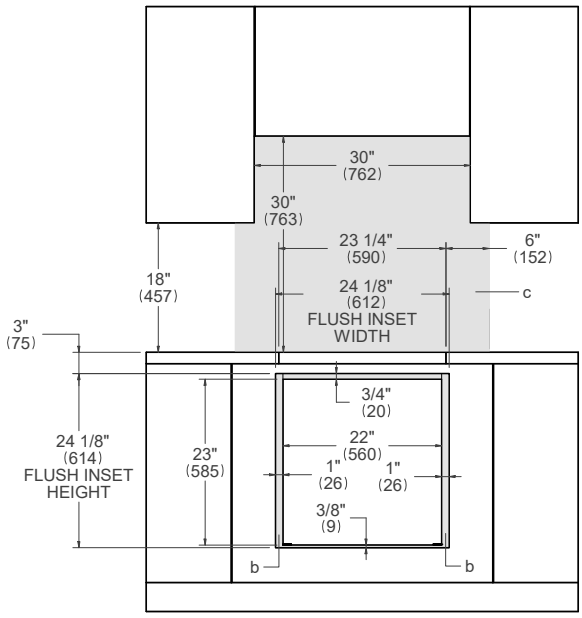


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Specialty Oven + 36" Drop-in Cooktop

Flush installation




PROF24SOEXV MAST366QBXT
PROF366QBXT MAST365QBXT
PROF365QBXT MAST365QXE
PROF365QXE


TOP VIEW – COOKTOP DETAIL

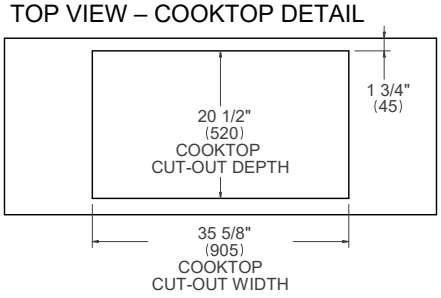


TOP VIEW – OVEN DETAIL

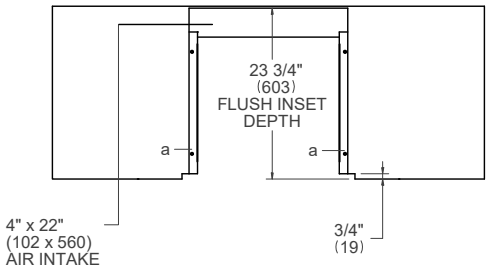

SIDE VIEW

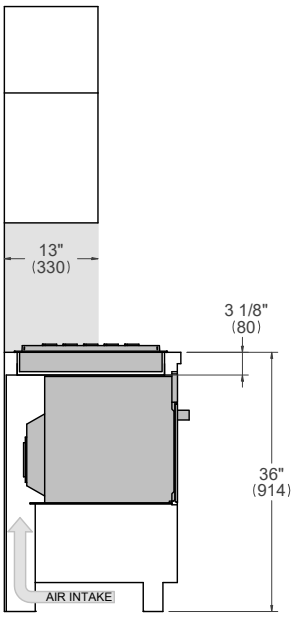

FRONT VIEW

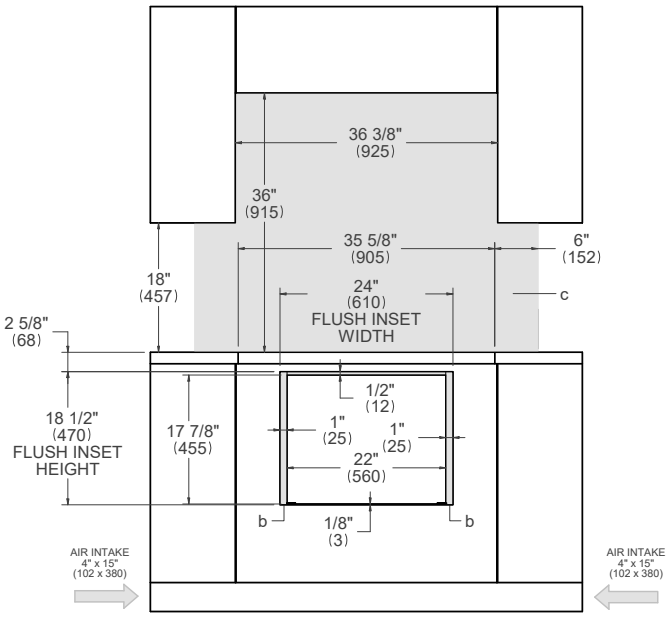


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Specialty Oven + 30" Drop-in Cooktop


Flush installation




PROF24SOEX

PROF304QBXT
PROF304QXE
MAST304QBXT
MAST304QXE


TOP VIEW – COOKTOP DETAIL

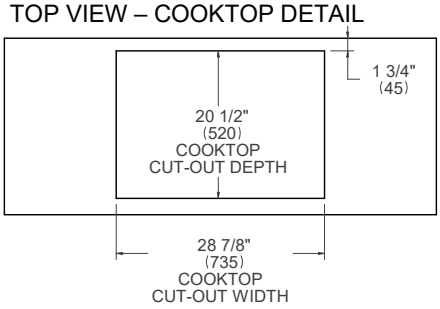


TOP VIEW – OVEN DETAIL

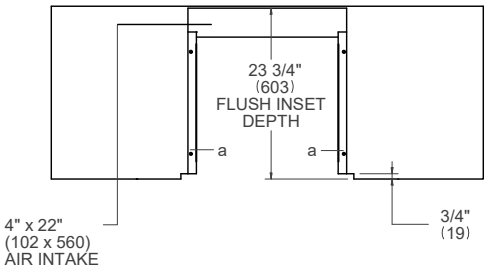

SIDE VIEW

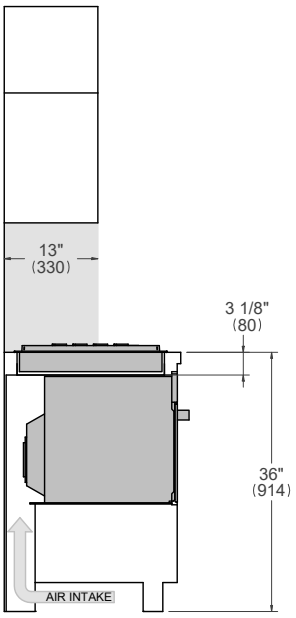

FRONT VIEW

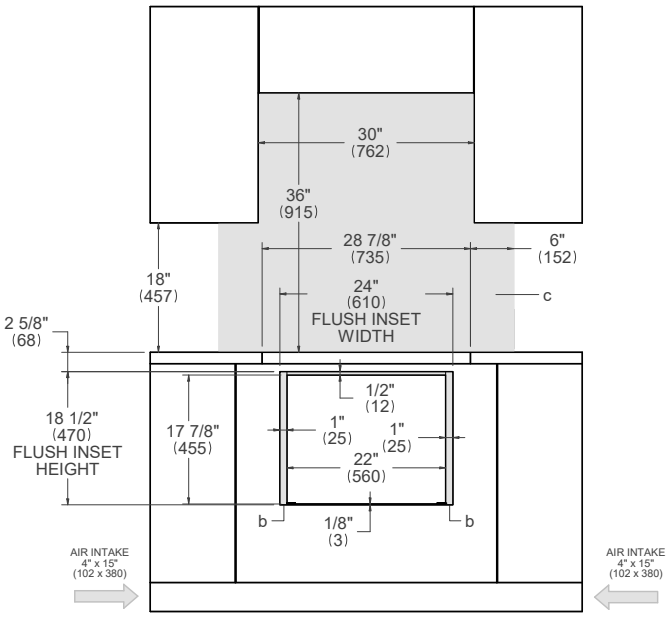


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Specialty Oven + 36" Cooktop XV

Flush installation




PROF24SOEX PROF365CTXV


TOP VIEW – COOKTOP DETAIL

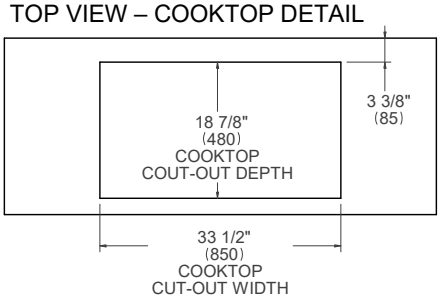


TOP VIEW – OVEN DETAIL

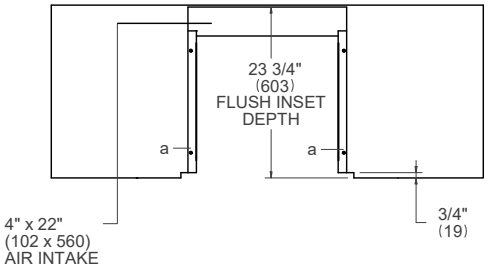

SIDE VIEW

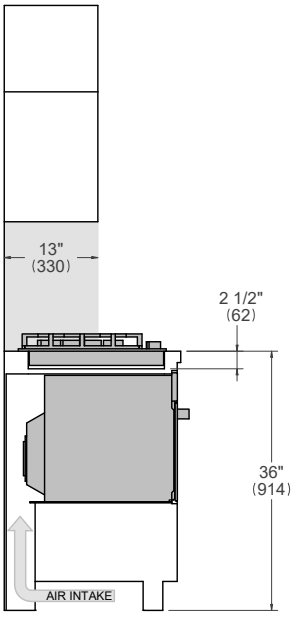

FRONT VIEW

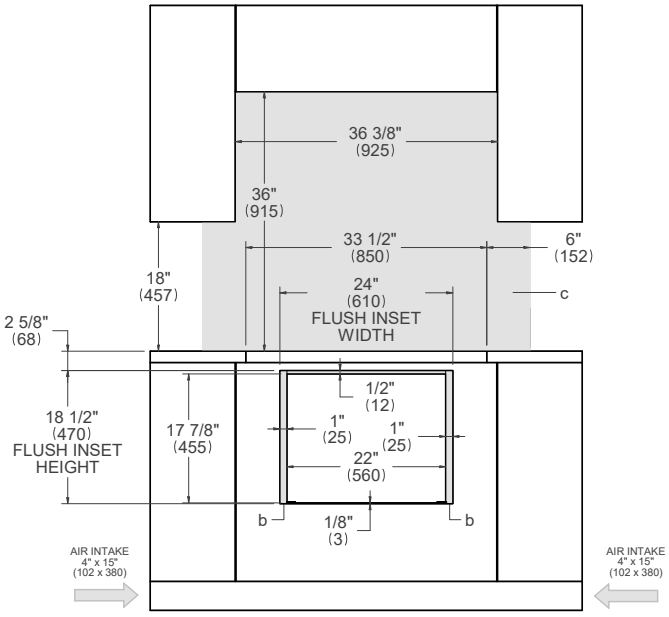


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Specialty Oven + 30" Cooktop XV

Flush installation




PROF24SOEX PROF305CTXV


TOP VIEW – COOKTOP DETAIL

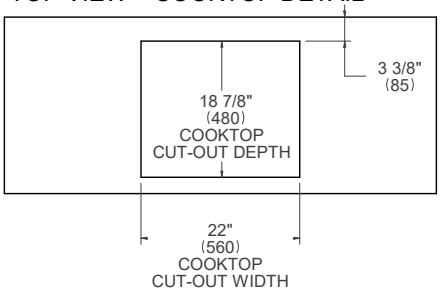


TOP VIEW – OVEN DETAIL

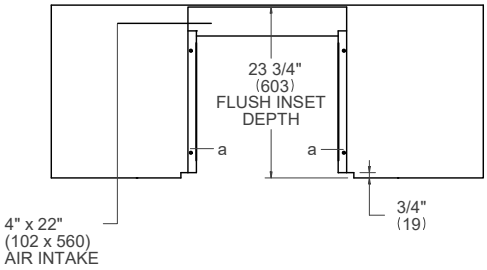

SIDE VIEW

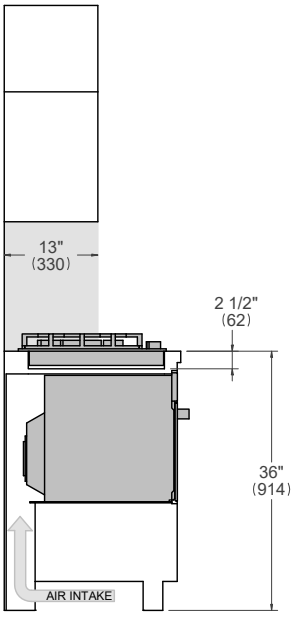

FRONT VIEW

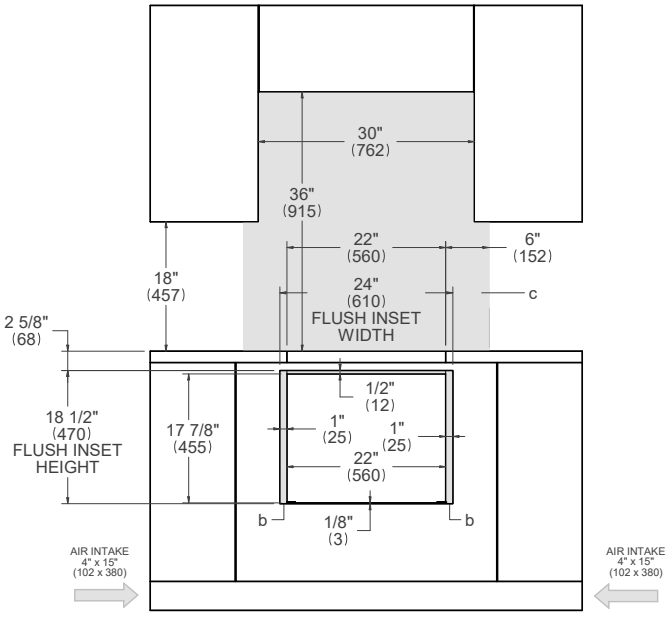

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Specialty Oven + 24" Cooktop XV


Flush installation

PROF24SOEX PROF244CTXV


TOP VIEW – COOKTOP DETAIL

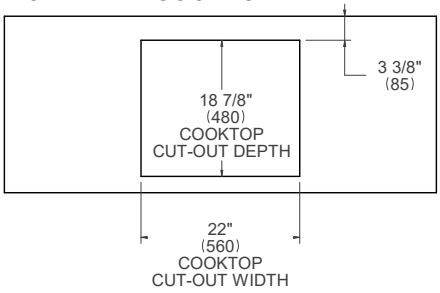


TOP VIEW – OVEN DETAIL

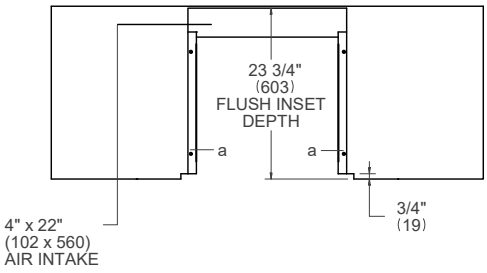

SIDE VIEW

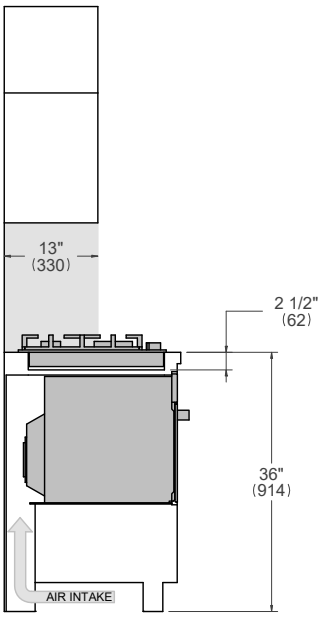

FRONT VIEW

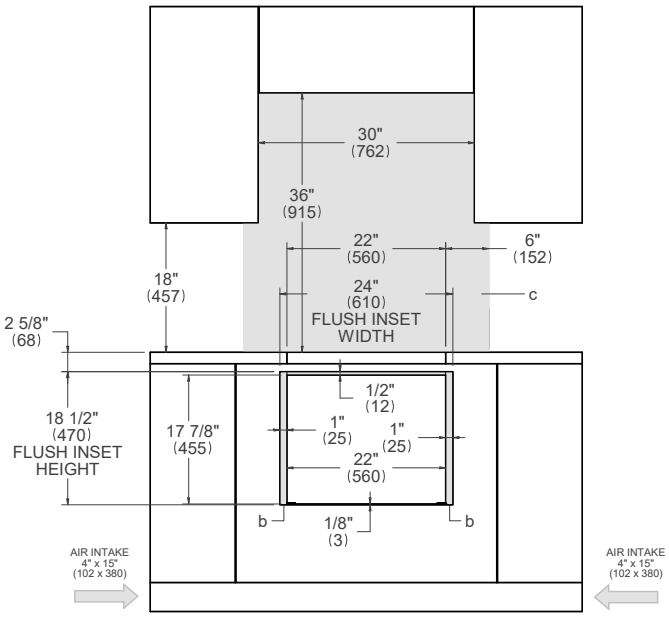


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Specialty Oven + 36" Induction Cooktop

Flush installation




PROF24SOEX P365IAE


TOP VIEW – COOKTOP DETAIL

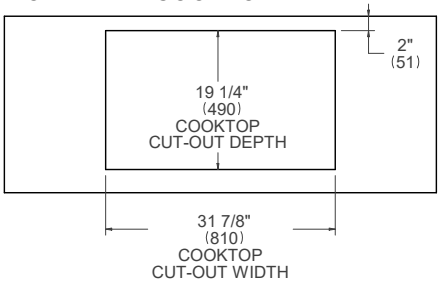


TOP VIEW – OVEN DETAIL

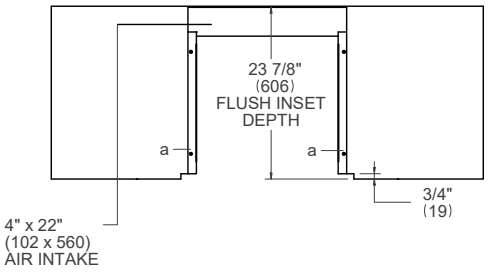

SIDE VIEW

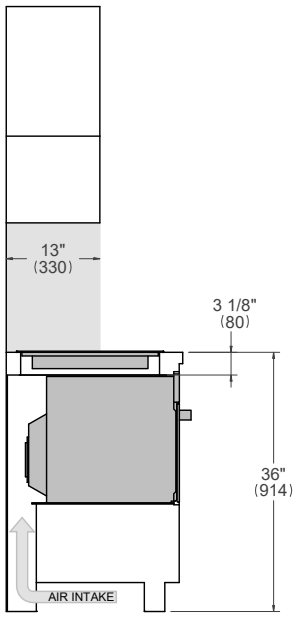

FRONT VIEW

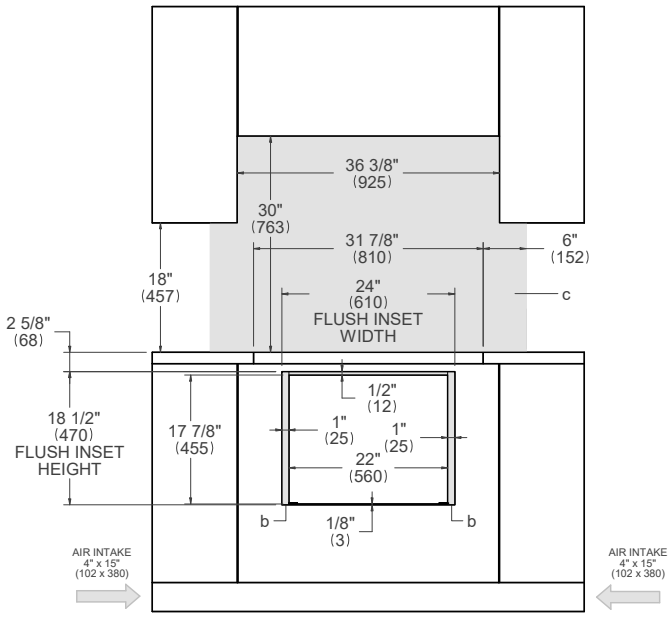


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Specialty Oven + 30" Induction Cooktop

Flush installation




PROF24SOEX P304IAE


TOP VIEW – COOKTOP DETAIL

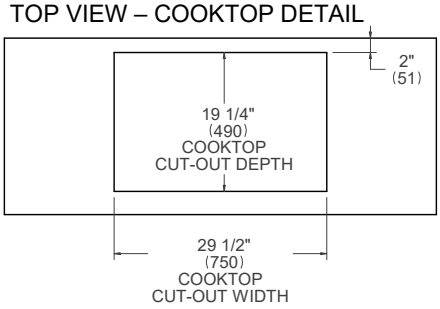


TOP VIEW – OVEN DETAIL

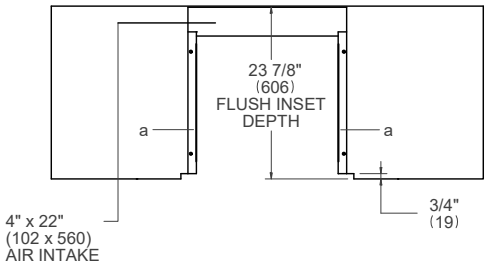

SIDE VIEW

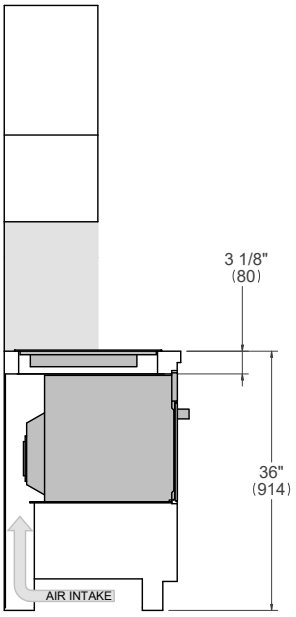


FRONT VIEW

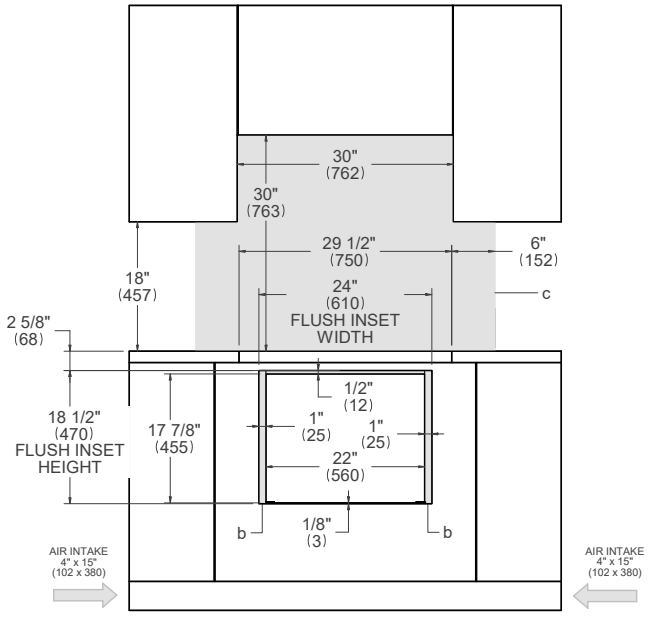

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Specialty Oven +
30" Electric Ceramic Cooktop
Flush installation




P304CER PROF24SOEX


TOP VIEW – COOKTOP DETAIL

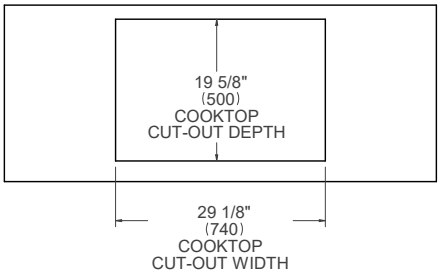


TOP VIEW – OVEN DETAIL

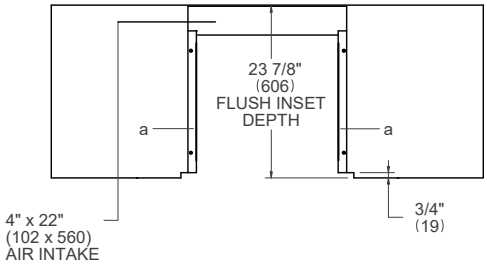

SIDE VIEW

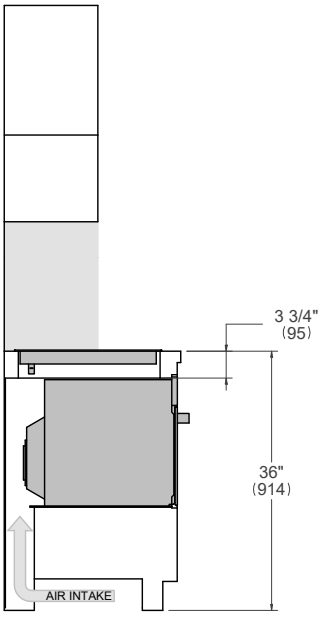


FRONT VIEW

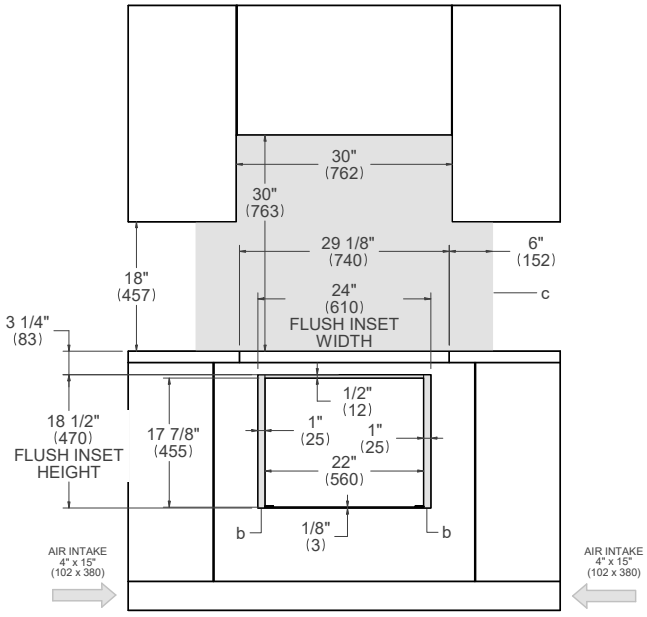

(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Specialty Oven +
24" Electric Ceramic Cooktop
Flush installation




PE244CER PROF24SOEX


TOP VIEW – COOKTOP DETAIL

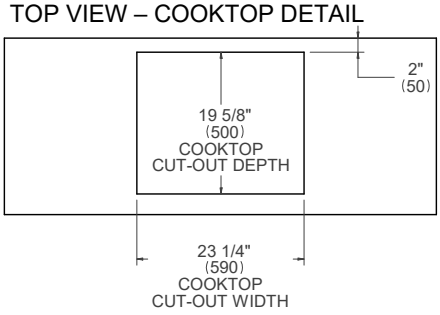


TOP VIEW – OVEN DETAIL

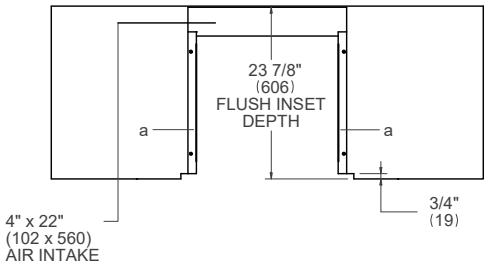

SIDE VIEW

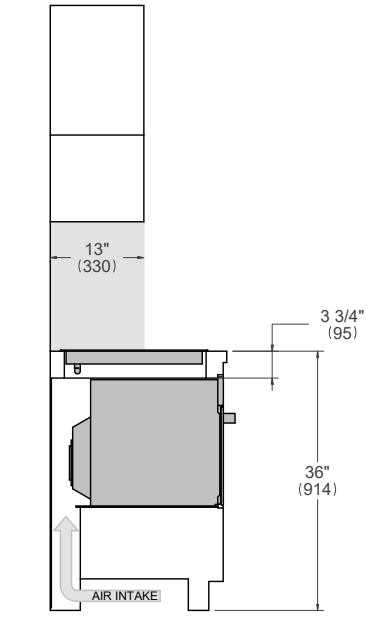

FRONT VIEW

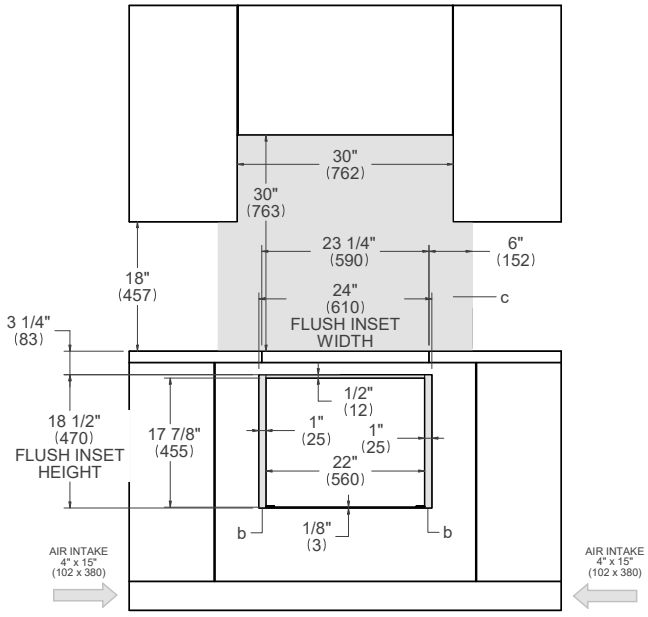


(a) Spacers - Included with appliance
(b) Visible Area - Match finish to outside cabinet panels
(c) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Microwave Drawer + 36" Drop-in Cooktop

Flush installation




PROF366QBXT MAST366QBXT MD24X
PROF365QBXT MAST365QBXT
PROF365QXE MAST365QXE


TOP VIEW – COOKTOP DETAIL

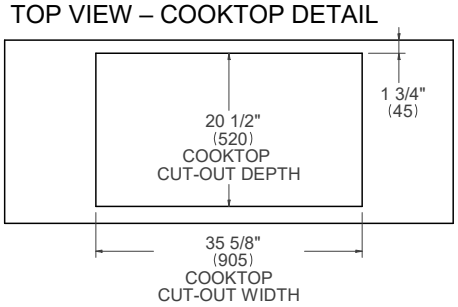


TOP VIEW – OVEN DETAIL

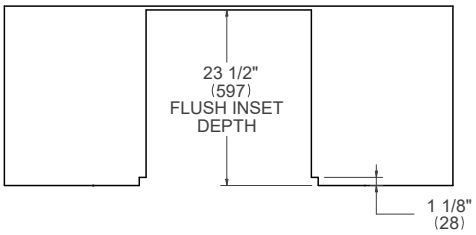

SIDE VIEW

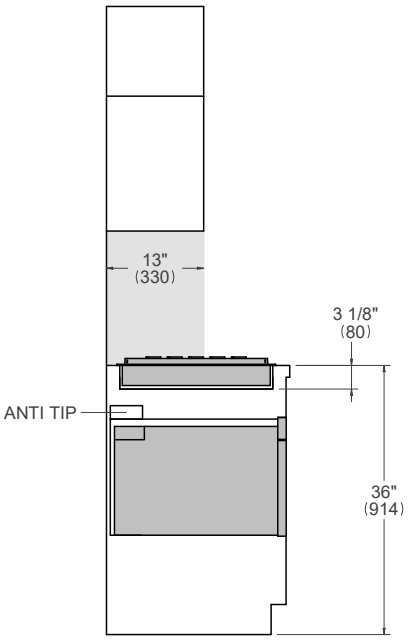

FRONT VIEW

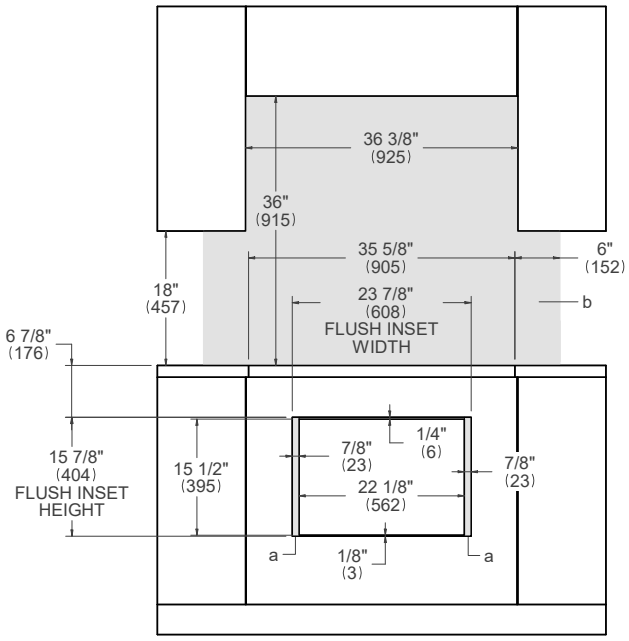


(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Microwave Drawer + 30" Drop-in Cooktop

Flush installation




PROF304QBXT MAST304QBXT MD24X
PROF304QXE MAST304QXE


TOP VIEW – COOKTOP DETAIL

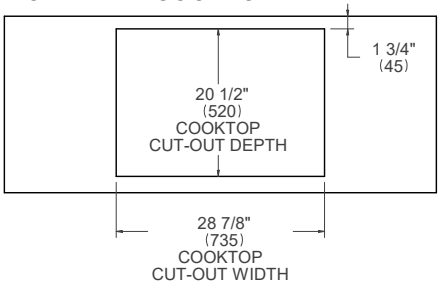


TOP VIEW – OVEN DETAIL

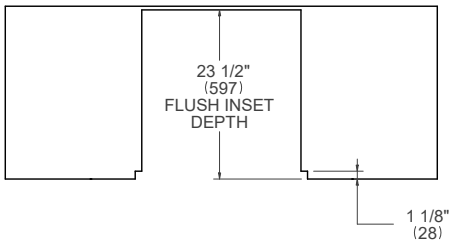

SIDE VIEW

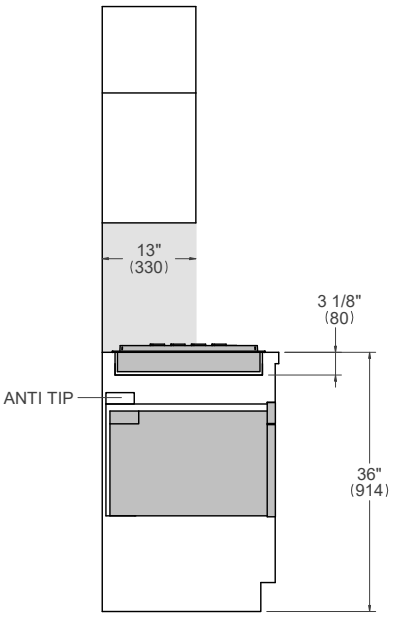

FRONT VIEW

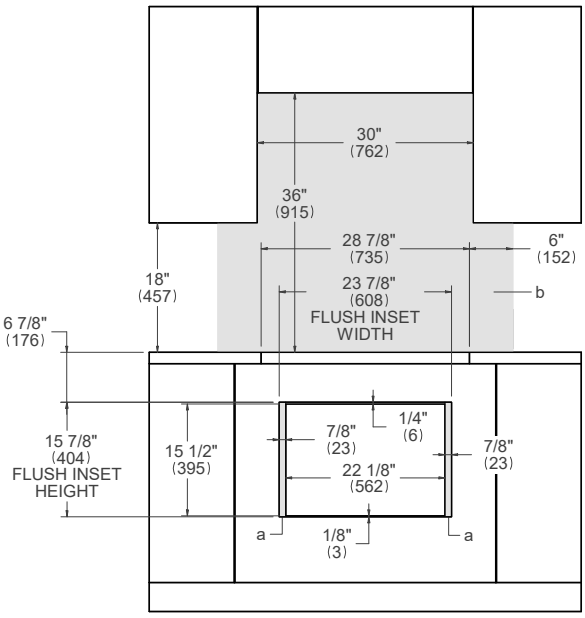


(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Microwave Drawer + 36" Cooktop XV

Flush installation




PROF365CTXV MD24X


TOP VIEW – COOKTOP DETAIL

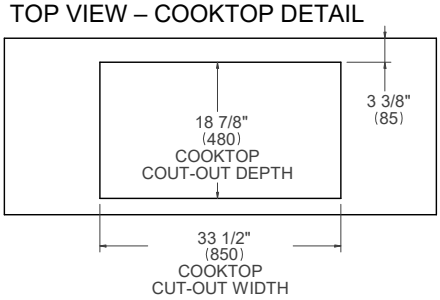


TOP VIEW – OVEN DETAIL

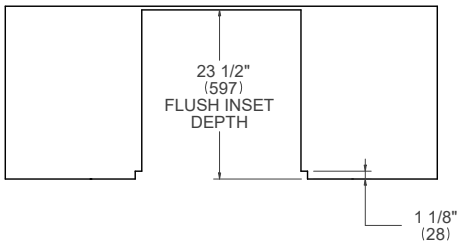

SIDE VIEW

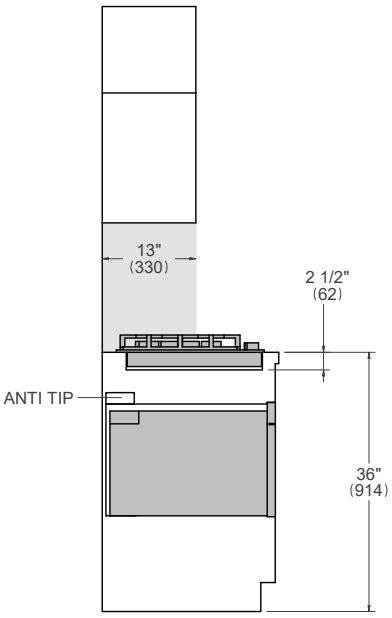

FRONT VIEW

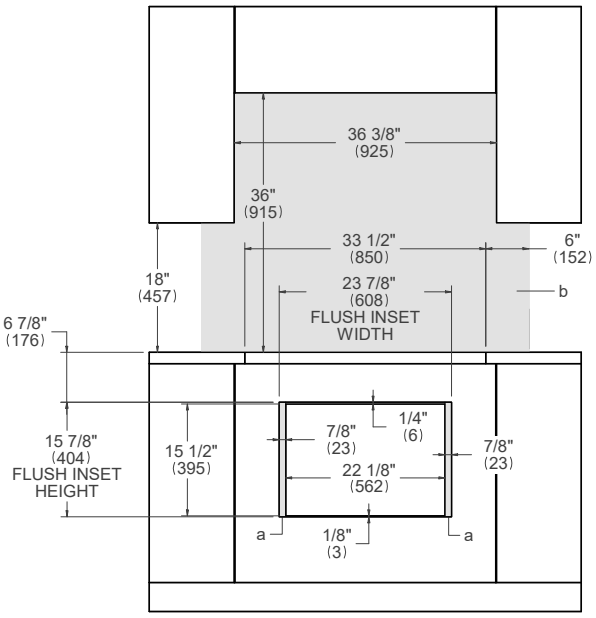


(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24" Microwave Drawer + 30" Cooktop XV

Flush installation




PROF305CTXV MD24X


TOP VIEW – COOKTOP DETAIL

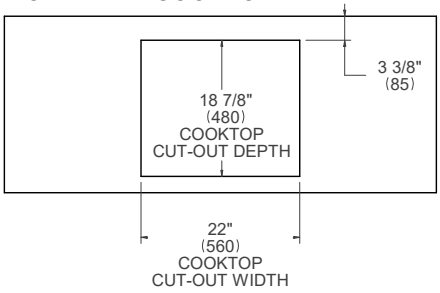


TOP VIEW – OVEN DETAIL

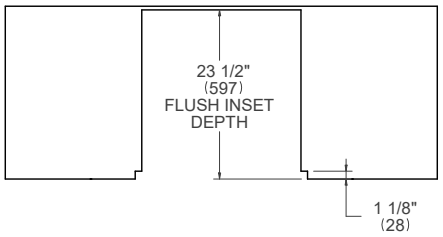

SIDE VIEW

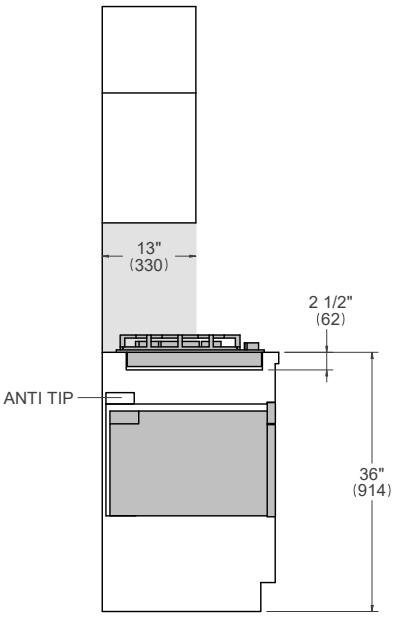

FRONT VIEW

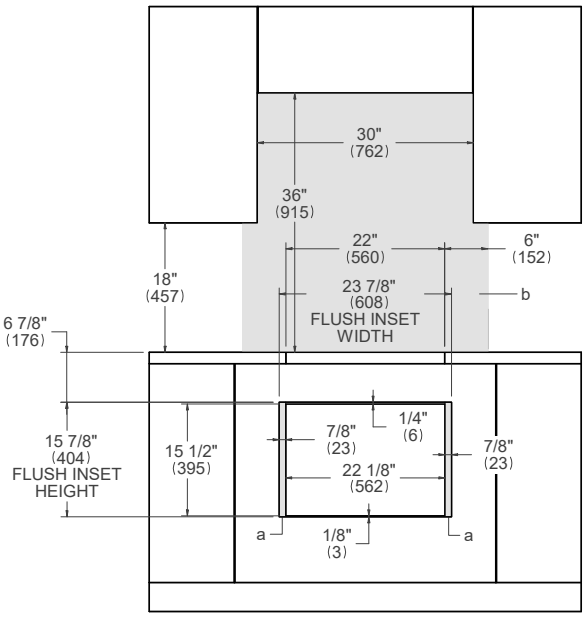

(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Microwave Drawer + 24" Cooktop XV


Flush installation

PROF244CTXV MD24X


TOP VIEW – COOKTOP DETAIL

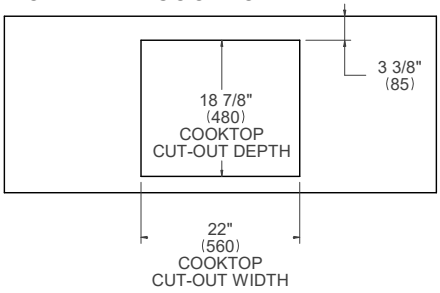


TOP VIEW – OVEN DETAIL

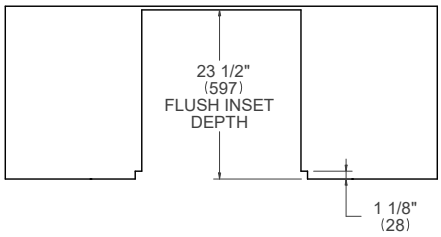

SIDE VIEW

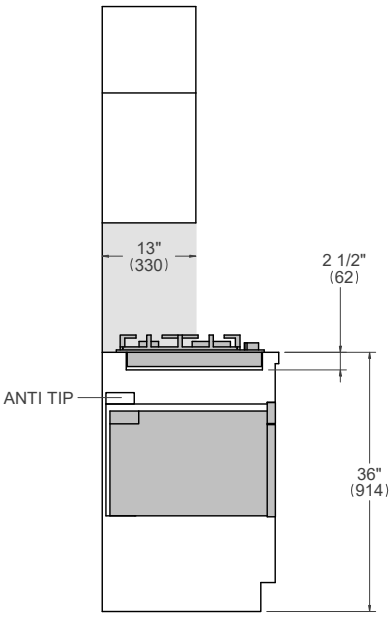

FRONT VIEW

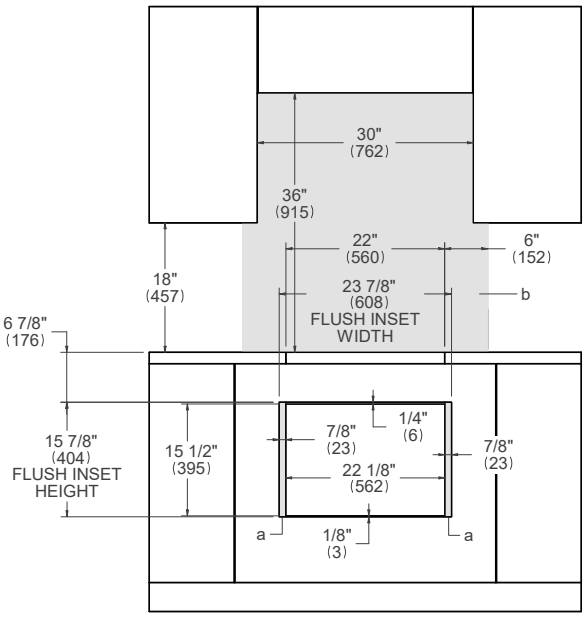


(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Microwave Drawer + 36” Induction Cooktop

Flush installation




P365IAE MD24X


TOP VIEW – COOKTOP DETAIL

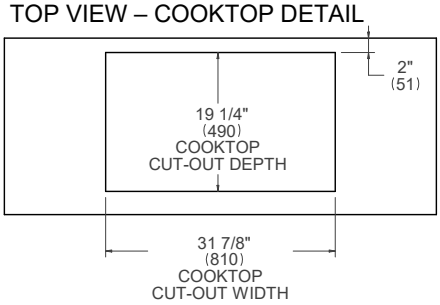


TOP VIEW – OVEN DETAIL

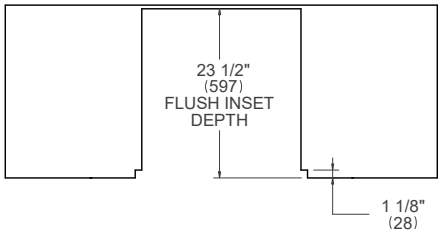

SIDE VIEW

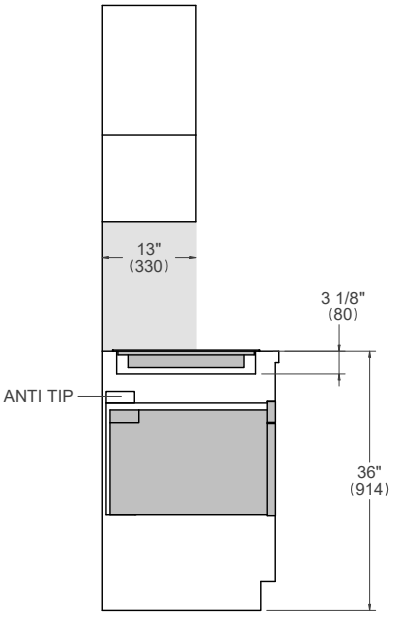

FRONT VIEW

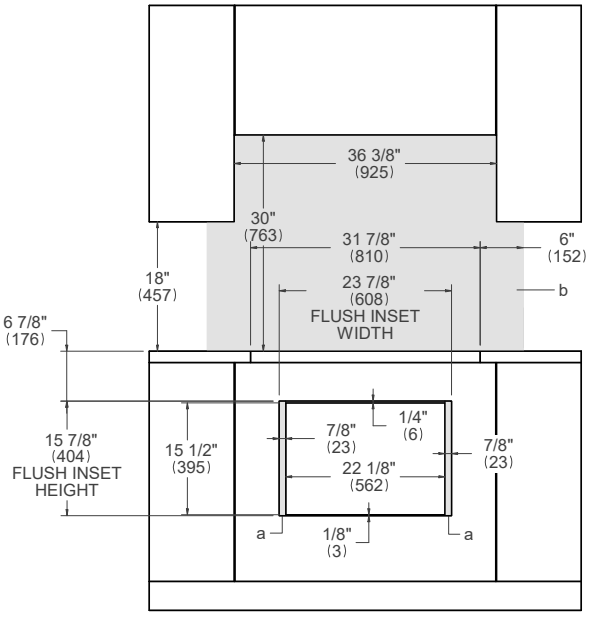


(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Microwave Drawer + 30” Induction Cooktop

Flush installation




PE304IAE MD24X


TOP VIEW – COOKTOP DETAIL

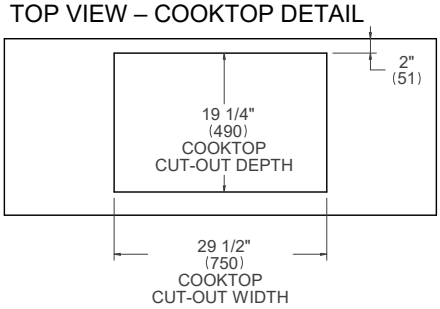


TOP VIEW – OVEN DETAIL

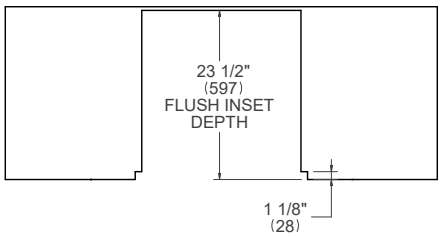

SIDE VIEW

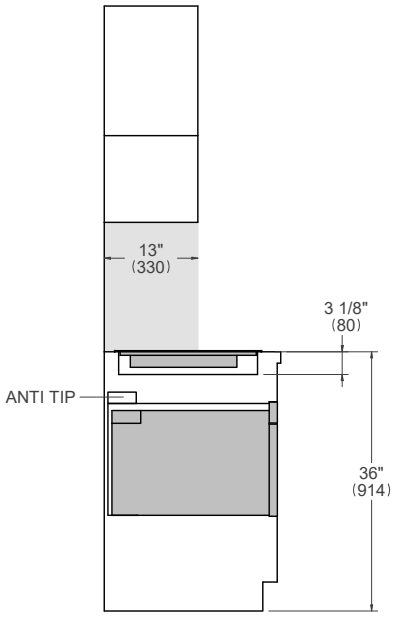

FRONT VIEW

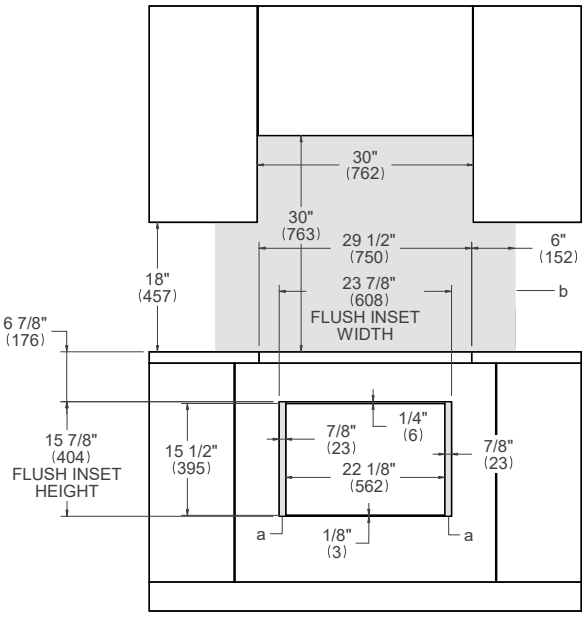


(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.


24” Microwave Drawer + 30” Electric Ceramic Cooktop

Flush installation




PE304CER MD24X


TOP VIEW – COOKTOP DETAIL

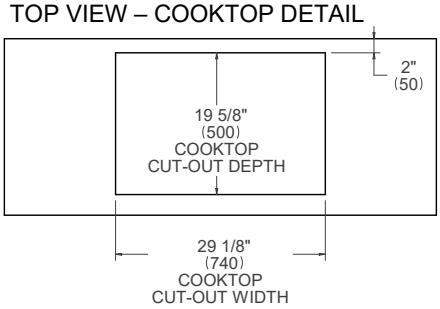


TOP VIEW – OVEN DETAIL

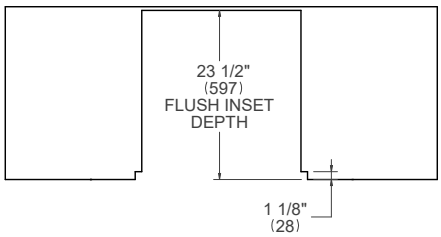

SIDE VIEW

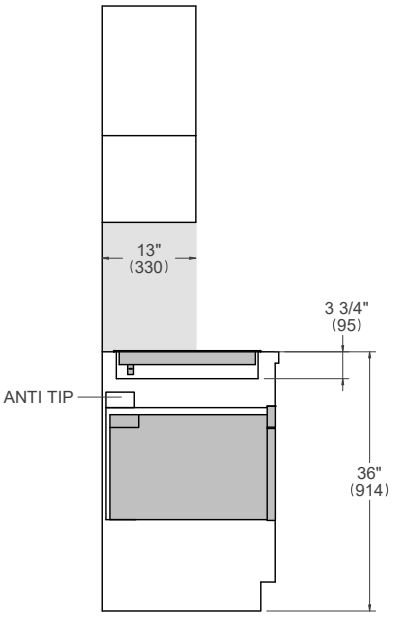


FRONT VIEW

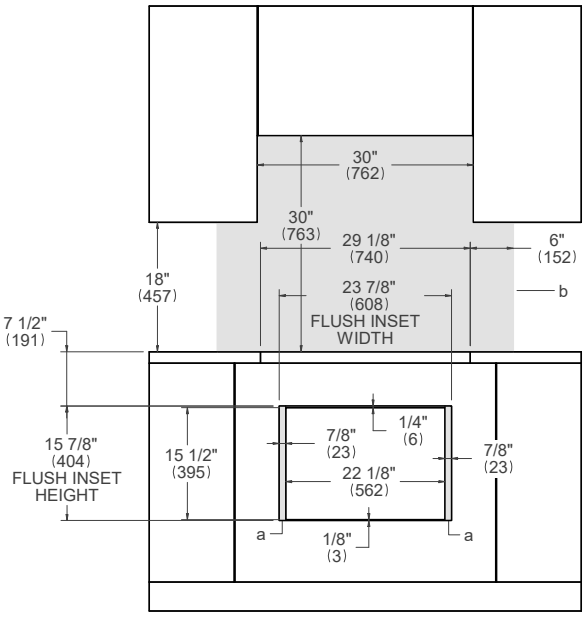

(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area


For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

24" Microwave Drawer +
24" Electric Ceramic Cooktop
Flush installation




PE244CER MD24X


TOP VIEW – COOKTOP DETAIL

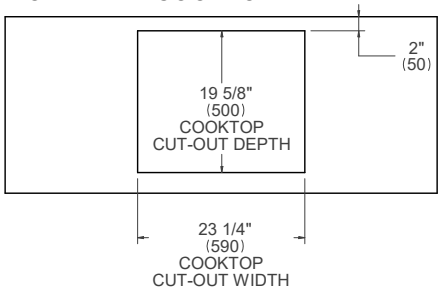


TOP VIEW – OVEN DETAIL

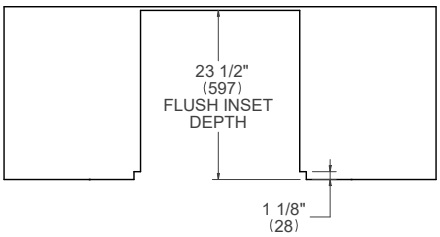

SIDE VIEW

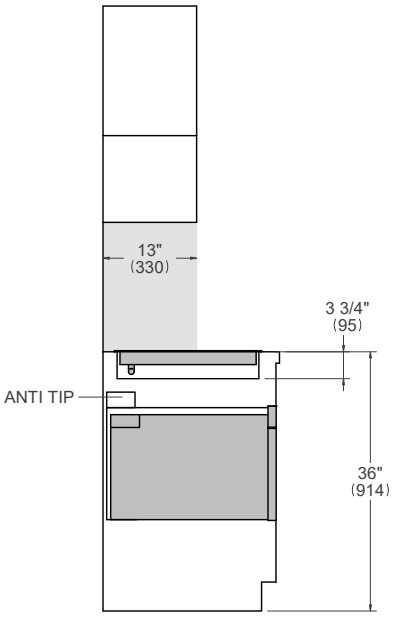

FRONT VIEW

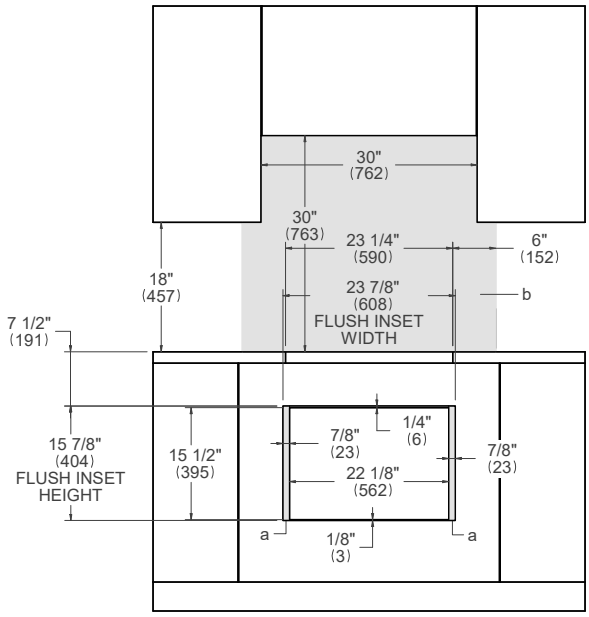

(a) Visible Area - Match finish to outside cabinet panels
(b) Combustible material cannot be installed within shaded area

For electrical and gas supply please see single installation requirements. Placement within the opening may require additional cabinet depth.

BERTAZZONI.COM



TO COOK BEAUTIFULLY