

WFTV10733XC

24" Front-Load Washer



GENERAL PROPERTIES

Style	Front Load
Capacity	2.3 cu. ft.
Control Type	Digital Display (White LED)
Connectivity	WiFi thru HomeWhiz™
Matching Dryer	HPD24414W

FEATURES

Maximum Spin Speed	1400 RPM
Variable Spin Speed	Yes
Unbalance Detection System	Yes
Automatic Temperature Control	Yes
Interior Light	Yes
Internal Water Heater	Yes
Delay Start Time (Ending In)	0-24 Hours
Remaining Time Indicator	Yes
Dispenser Drawer	Detergent, Fabric Softener, Bleach
Door Lock Indicator	Yes

PREMIUM TECHNOLOGY



RECYCLED TUB™ (INDUSTRY FIRST)

The Beko washtub uses 60 recycled plastic water bottles in its manufacture. Recycled plastic bottles are transformed into high performance materials, which is kinder to the planet without compromising performance or durability.



STEAMCURE™

Steam introduced at the beginning of the cycle helps pretreat and loosen stains, for smarter, better cleaning.

*Tested by internal laboratories



FAST+

If you think life is too short to sit around and wait for the washing machine to be done, here's something to get back time. The Fast+ function senses the type of fabric and the amount of clothes automatically, optimizing the washing program and letting you reduce program duration up to 55%* at the touch of a button.

24" Front-Load Washer

FEATURES CONTINUED

Child Lock	Yes
Overflow Safety w/ Automatic Draining	Yes
Program Follower	Yes
Automatic Water Adjustment System	Yes
ProSmart Inverter Motor	Yes
Silence Level - Washing	52 dBA
Silence Level - Spinning	76 dBA
Adjustable Leveling Legs	4
Stackable	Yes

EFFICIENCY

Energy Efficiency Class	CEE Tier 2
ENERGY STAR® Certified	Yes
Total Annual Energy Consumption (kWh)	106 kWh/year

CYCLES

Number of Cycles	15
Normal	Yes
Heavy Duty / Whites	Yes
Mixed Fabric	Yes
Wrinkle Free	Yes
Allergen / Pet Care+	Yes
Jeans / Dark Wash	Yes
Hand Wash	Yes
Organic Wash	Yes
Quick Wash	Yes
Rinse	Yes
Steam Therapy	Yes
AquaIntense Wash	Yes
Fitness Wear	Yes
Tub Clean	Yes

CYCLES CONTINUED

Spin & Drain	Yes
Download Cycles	Yes (Mixed Fabric, Delicates, Organic Wash, Cold Wash, Bedding/Bulky)

OPTIONS

Heavy Soil	Yes
Soak	Yes
Steam	Yes
Extra Rinse	Yes
Fast+	Yes
Remote Control	Yes
Temperature Selection	Yes
Spin Speed Selection	Yes

MATERIALS AND FINISHES

Drum Material	Stainless Steel
Cabinet	White
Door Rim	Chrome
Cycle Selector Knob	Black with Chrome Rim

TECHNICAL INFORMATION

Total Power (W)	1,100 W
Volts / Frequency	120 V / 60Hz
Rated Amps (A) / Min. Circuit Breaker	10 A / 15 A
Circuit Required for Laundry Pair	30A Dedicated (washer can plug into matching dryer)
Power Cord	Included, 3-Wire (NEMA 6-15R)
Power Cord Length	4.99 ft.
Drain Hose Length	62 1/2 in.
Inlet Hose Length	57 in.
Door Hinge	Left Side (Not Reversible)

WFTV10733XC



24" Front-Load Washer

DIMENSIONS & WEIGHT



Product Dimensions (HxWxD) (in)	33 1/4 x 23 7/16 x 22 3/8
Product Depth with Door Open (in)	40 15/16
Required Cutout Size (HxWxD) (in)	34 x 25 x 23 1/2
Carton (H x W x D) (in)	35 x 26 1/5 x 28
Product Weight (lbs)	167.55
Shipping Weight (lbs)	174.17

ACCESSORIES (INCLUDED)

Hot and Cold Water Supply Hoses	Yes
---------------------------------	-----


WARRANTY

Entire Appliance	2-year Limited Warranty (Parts & Labor)
Circuit Board and Washer Drum	5-year Limited Warranty (Parts Only Years 3-5)
Stainless Steel Drum	Lifetime (Parts Only After 2 Years)

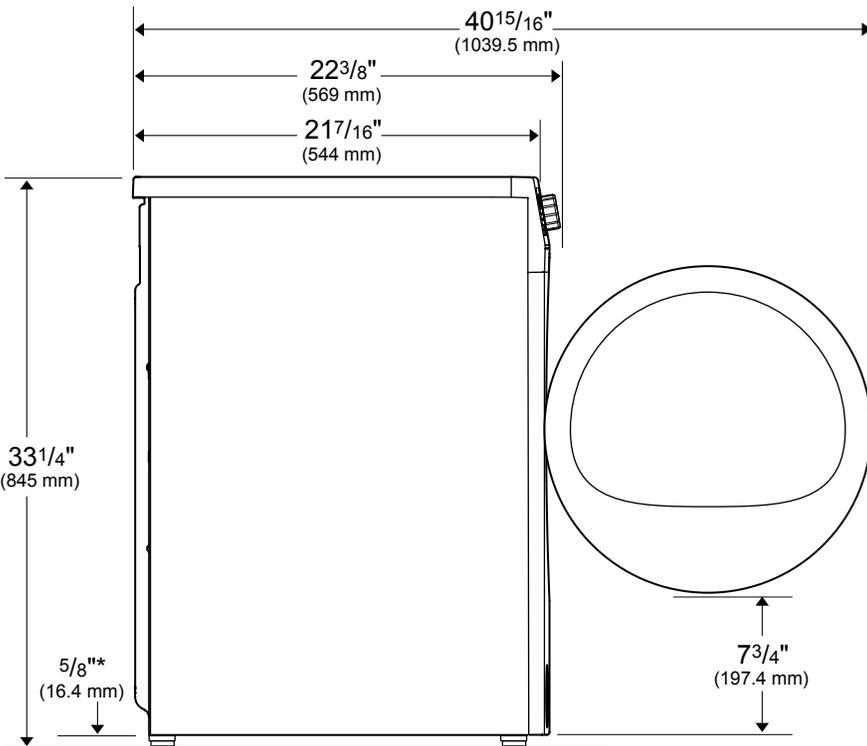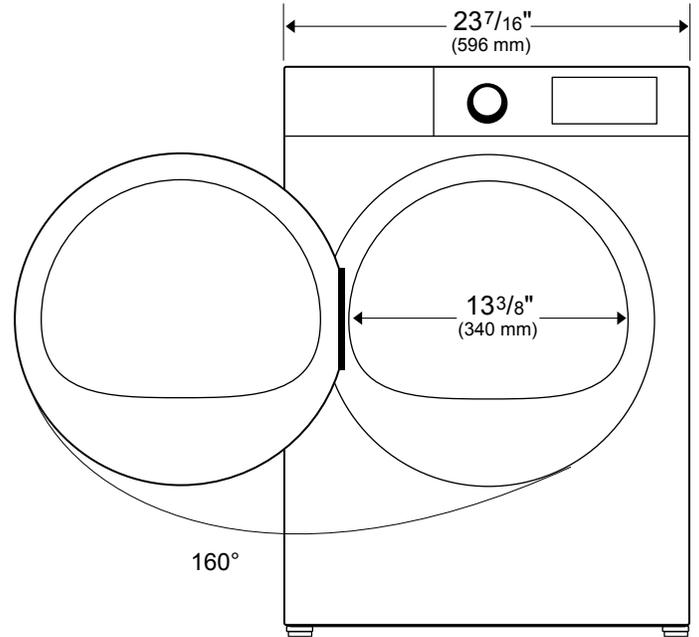


*Adjustable to 1" max. (25.4 mm)

Drainage

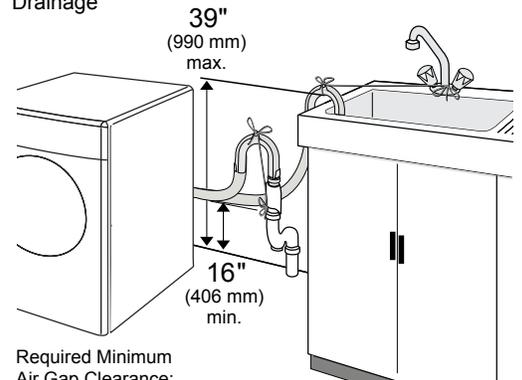

Required Minimum Air Gap Clearance:
 1/2" (13 mm) Top
 1/2" (13 mm) Sides
 1/2" (13 mm) Back

Water Supply Connection

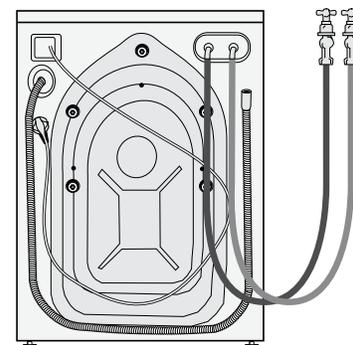


WFTV10733XC



24" Front-Load Washer

Clearances for Undercounter Installation

Only Washer

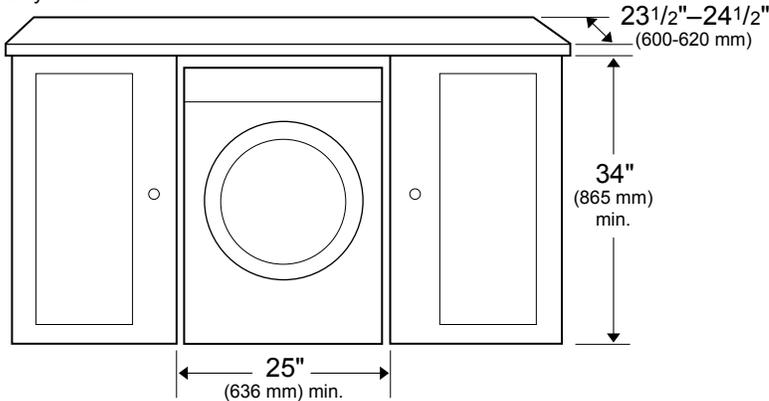


Required Minimum Clearances:
(Stand Alone, Side by Side, or Stacked)

Washer	Vented Dryer	Heat Pump Dryer
Top: 1" (25 mm)	Top: 1" (25 mm)	Top: 1" (25 mm)
Sides: 1/2" (13 mm)	Sides: 3/16" (4 mm)	Sides: 1/2" (13 mm)
Rear: 1/2" (13 mm)	Rear: 4" (101.6 mm)	Rear: 1/2" (13 mm)
Front: xxxxx	Front: 3/16" (5 mm)	Front: 3/16" (5 mm)


Clearances for Undercounter Installation

Both Washer and Vented Dryer

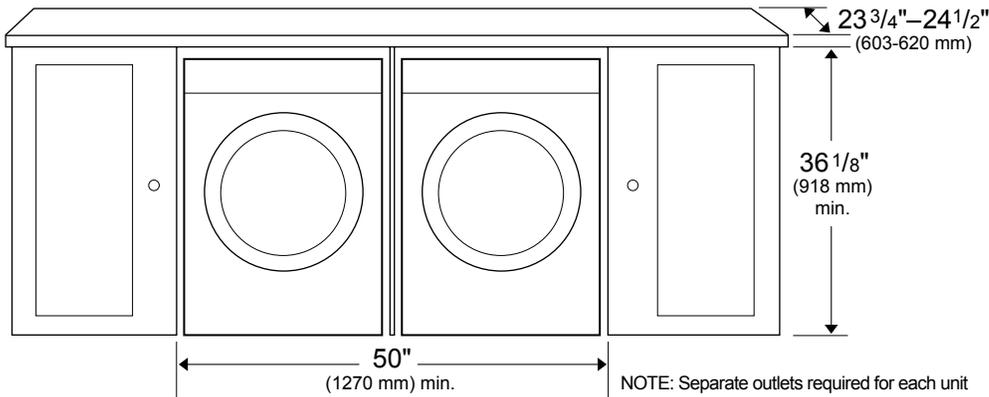

Clearances for Undercounter Installation

Both Washer and Heat Pump Dryer

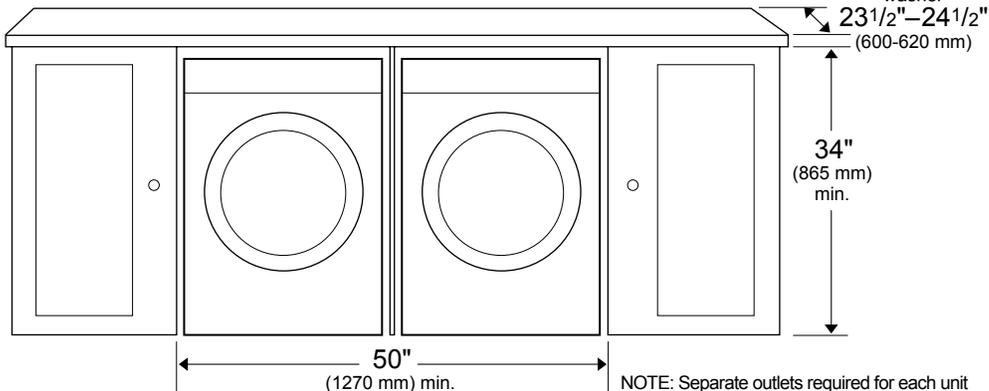

Closet Door Ventilation Requirement

Washer:
A louver having minimum 23 in2 (148 cm2) air opening located at 3 in (7.62 cm) distance from the bottom of closet door.

Vented Dryer:
A louver having minimum 46 in2 (297 cm2) air opening located at 3 in (7.62 cm) distance from the top of closet door.


Heat Pump Dryer:
Closet door must have 2 openings, one located 3.2 inches (8 cm) from bottom of door having a minimum area of 16 in2 (103 cm2) and the other one located 3 inches (7.5 cm) from top of door having a minimum area of 46 in2 (294 cm2).

WFTV10733XC



24" Front-Load Washer

Stacked Installation – Washer and Ventless Heat Pump Dryer

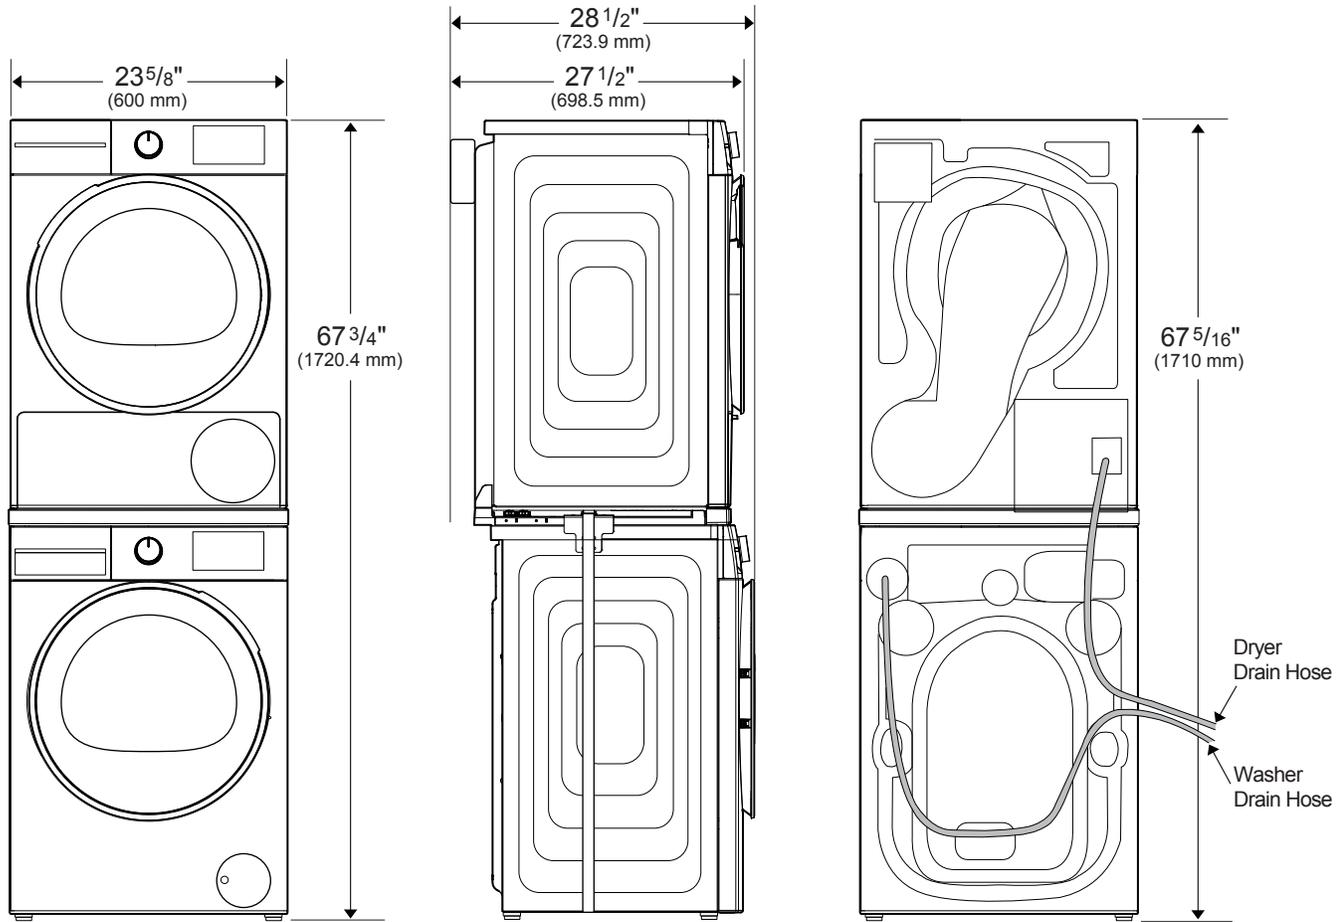


NOTE: Separate outlets required for each unit

WFTV10733XC



24" Front-Load Washer

Stacked Installation – Washer and Vented Dryer

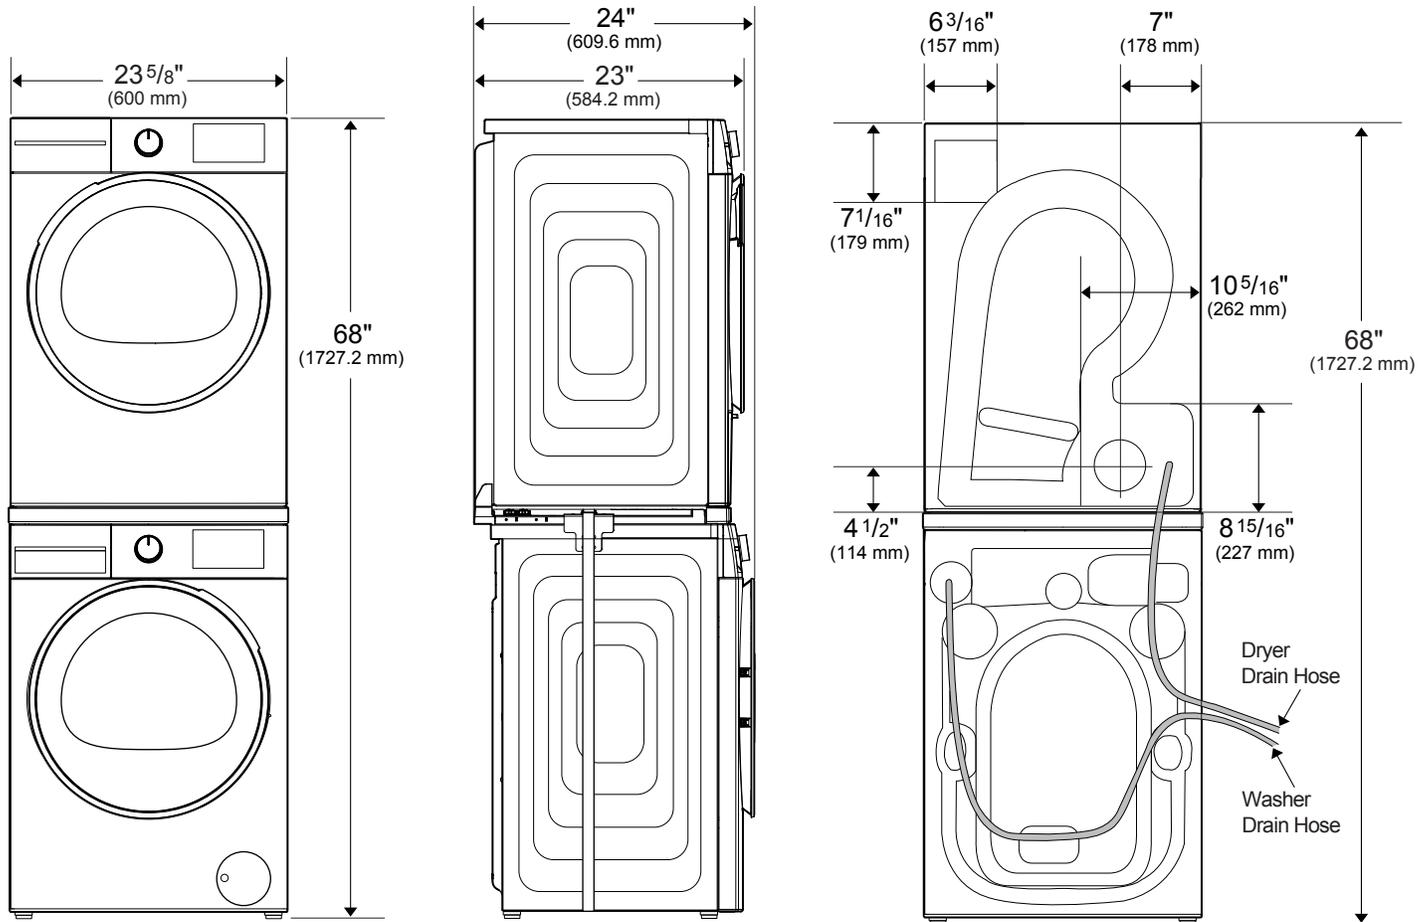

NOTE: Separate outlets required for each unit

NOTE TO THE INSTALLER: All height, width, and depth dimensions are shown in inches (as well as metric). Beko U.S., Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website, www.BekoAppliances.com, or call 888.352.2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials, or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.