

## **30 INCH PRO-STYLE DUAL FUEL RANGE**


#### BDFP34550SS / BDFP34550CSS

# **Contemporary European Design**

Winner of the prestigious iF Design award, Blomberg ranges bring sophistication, thoughtfulness, and cutting-edge technology to the kitchen, harmonizing elegance with chef-worthy functionality with the effortless style your upscale home deserves. This balance is evident in every feature, from the sleek oven handle and sculpted ergonomic knobs to the beautiful LED lights under the bullnose that illuminate the controls and programmable electronic timer.



# **In Harmony with Your Life**



#### 20,000 BTU Burners

Ingenious Blomberg technology can actually help you refine your culinary skills! Flexible-power burners offer pre-set options for more precise cooking at different temperatures. The 20,000 BTU setting delivers high heat to speed up preparation with a fast boil or sizzle. Switching to the 675 BTU setting automatically adjusts to gentler heat, ideal for simmering delicate sauces, melting chocolate, or cooking fluffy rice like an expert.



#### Programmable Self-Clean Oven

Time is the ultimate luxury, and Blomberg ranges protect yours with high-tech programmable self-cleaning oven technology that lets you set exactly the right cycle. Set it for three hours, four hours, or five hours depending on the level of cleaning required. There's no need to scrub hard-to-reach surfaces, scrape up stubborn spills, or use harsh chemicals. At the end of the cycle, simply wipe away ash with a cloth.



#### **Industry-leading Oven Capacity**

Blomberg knows you can never have too much room in your oven, especially when you're entertaining. That's why we feature the largest oven capacity available in a 30-inch range, with 5.7 cu. ft. of cooking space to accommodate everything from holiday roasts to full-size commercial baking sheets. Dual interior lights and a large viewing window make it easy to monitor what's cooking.



#### **Auto Re-Ignition**

Blomberg ranges are designed to be intelligent as well as stylish and efficient. Safety is built in, with automatic re-ignition should a gust of wind, a spill, or a boil-over extinguish the burner flame at any time during cooking.



### **30 INCH PRO-STYLE DUAL FUEL RANGE**

#### BDFP34550SS / BDFP34550CSS



### Cooktop

5 gas burners

20,000 Btu power burner with simmering

Dual simmering burners

Oval shaped center burner

Auto re-lanition

Easy to clean enamel burner plate

Electronic ignition knob integrated

Cast iron continuous pan supports

#### Range

Convection cooking

Self-clean oven

Industry leading oven capacity 5.7 cu. ft.

Sabbath mode

Bull nose lighting

Cool touch door

3 Wire heavy duty racks

Full extension telescopic rack

Easy to clean enamel oven interior

Interior lighting

Adjustable feet

LPG conversion kit

#### **Accessories**

Griddle optional Side trim kit optional Island trim included

#### **Dimensions**

H x W X D: 37 ½"x 29 13/16" x 29 5/16" Height includes 1 ½" for back guard Depth includes knobs & handle

GENERAL	BDFP34550SS / BDFP34550CSS
Туре	Freestanding
Size	30"
Color	Stainless Steel
Side Walls	Black
Control type	Knob control with multi functions
FUNCTIONS	
Multi-dimensional Cooking	No
Convention Cooking	Yes
Bottom Heater	Yes
Convection	Yes
Broiler	Yes
Broil Convection broiler	Electric
Convection proller  Convection roast	Yes Yes
	No
True European convection SPECIAL FEATURES	NO
12/24-hour clock format	
	Ontional
Splash Back Island Trim	Optional Included
Simmering	Yes
Cooling Fan	Yes
Cavity Enameling Color	Black
Oven Lights	2 x Halogen
Adjustable Feet	Yes
Anti-tip (tilting) bracket	Yes
Bottom Compartment	No
Fuel Type	NG+Electric
LPG Conversion Kit	Yes
OVEN DOOR(S)	
Oven Glass Window	"O" Shaped Metal + Glass
Door Cooling System	Cool Door -4 Pane Heat Resistant Glass(fixed)
Net Capacity cu. ft.	5.7 cu. ft.
Bottom Heating Element Wattage	2400W
Upper Heating Element Wattage	3500W
Convection Element Wattage	-
Low Grill (Broil)	2000W
Grill (Broil)	2000W
ACCESSORIES / OVEN CAVITY	Ohaveira asif ala ara Olaviala
Rack Positions	Stay in self clean – 6 levels
Telescopic Pull-out Shelf System Pyrolytic Self Cleaning	1 Level (Full Extension) Yes
	Vec
Sabbath Mode Broiler Pan	Yes 1
Broiler Pan	1
Broiler Pan Wok adapter	1 Yes
Broiler Pan Wok adapter Chromed racks	1
Broiler Pan Wok adapter Chromed racks COOKTOP	1 Yes 3
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration	1 Yes 3
Broiler Pan Wok adapter Chromed racks COOKTOP	1 Yes 3 5 Gas 20,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left	1 Yes 3 5 Gas 20,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU Continuous cast iron 3
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in)	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height	1 Yes 3  5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½"
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16"
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width Overall dim - depth	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 20,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16"
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width Overall dim - depth Weight (lb./kg)	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16"
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (Ib./kg) POWER / RATINGS	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 268 lbs./121.5 kg
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (Ib./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz	1 Yes 3  5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 268 lbs./121.5 kg
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 20,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 268 lbs./121.5 kg
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable	1 Yes 3  5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 268 lbs./121.5 kg
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable INSTRUCTIONS FOR USE	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 268 lbs./121.5 kg
Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable	1 Yes 3 5 Gas 20,000 BTU 4,000 BTU 20,000 BTU 20,000 BTU 10,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition - 36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 268 lbs./121.5 kg


<sup>\*</sup>Canada model (BDFP34550CSS) has 4 prong power supply cord




## **30 INCH PRO-STYLE DUAL FUEL RANGE**

#### BDFP34550SS / BDFP34550CSS

## **Dimensions and Installation**

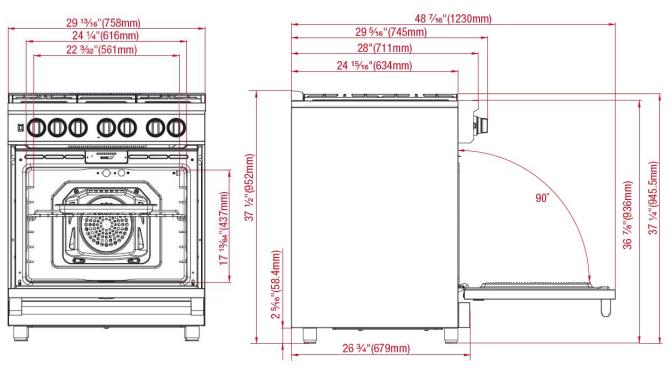

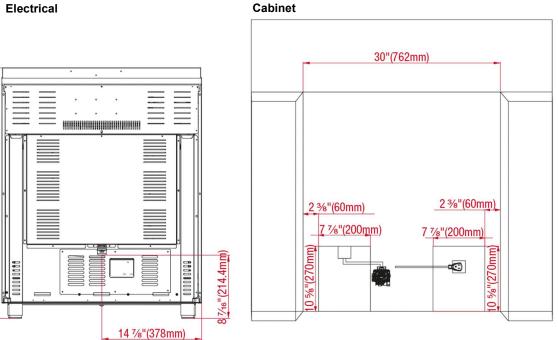

NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.us or call 888 352 2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.