


JLA-e110-CatalogSheet.pdf

Info	
Input Grounding: Selectable (Isolated or Grounded)	Electrical
Level Control: Variable: full mute to +15 dB over reference gain	Electrical
Power Modes: Off, On or Automatic Signal-Sensing	Audio
Crossover Filter: 24 dB per octave with Linkwitz-Riley alignment	Driver
Crossover Frequency Range: Variable: 25 Hz – 130 Hz	Network
Polarity: 0 or 180 degrees	Crossover
Phase: Variable from 0 – 280 degrees, referenced to 80 Hz	Bandwidth

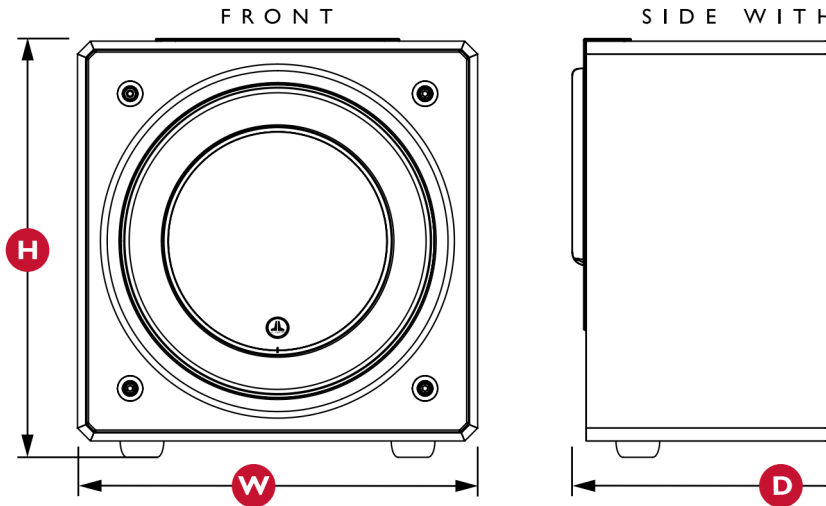

"JL Audio", "E-Sub", "Ahead of the Curve" and the JL Audio logo are registered trademarks
©2013 JL Audio, Inc. • U.S. PATENTS: #5,734,734 #6,601,844 Other U.S. & Foreign patents per
Due to our policy of continuous product development, all specifications are subject to change

Download

Share

www.jlaudio.com



JLA-CR1-CatalogSheet.pdf

(0)


[Download](#)
[Share](#)


JLA-e112-CatalogSheet.pdf

(0)


[Download](#)
[Share](#)



JLA-e110-CatalogSheet.pdf

Select All

1 - 5 of 5

Sort by Date Added ▼

Thumbnail ▼

✓

Download

Share