



Choose how you wash with this top load washer. Take out the Removable Agitator for extra capacity for bedding or bulky items, or keep it in to break down tough soils. ActiveFall™ Wash cascades water down through the basket, helping detergent reach every item for an even clean*. Fill up on detergent and skip refills with the Load & Go™ Bulk Dispenser for up to 20 loads**, and get a smarter clean tailored to your mixed loads with AI Wash.

*One select cycles
**Based on an 8-lb load with Delicates Basket option off

Top Features

- Removable Agitator
- ActiveFall™ Wash
- Load & Go™ Bulk Dispenser

Manuals & Literature:

 [Dimension Guide](#)

Whirlpool® 6.0 - 6.1 cu. ft. IEC Smart Top Load Washer with the Removable Agitator

WTW8507TW

Available Finishes/Colours



WTW8507TW
White



WTW8507TR
Radiant Silver



WTW8507TL
Other

Dimensions		Modifiers	
Depth	27.88	Number Of Wash Rinse Temperatures	5
Height	41.25	Soil Selections	Extra Heavy; Extra Light; Heavy; Light; Normal
Width	27.38		
Modifiers			
Delay Start	Up to 8 hours	Exterior	
Temperature Selections	Cold; Cool; Tap Cold; Warm; Hot	Adjustable Feet	Yes
		Lid Door Finish	Edge Glass
Number Of Rinse Options	4	Lid Door Lock	Yes
Number Of Water Levels	4	Slow Close Lid	Yes
Pre Soak	120 minutes		
Rinse Temperature	Cold	Details	
Spin Speed Selections	Fast; Medium; Off; Quiet	Wash Action	2 in 1 Removable Agitator
Water Levels	Auto; High; Max Fill; Medium	Suspension System	4 Springs 4 Dampers
		Out Of Balance Sensing	Yes
Number Of Soil Levels	5	Maytag Commercial Components	No
Number Of Spin Speeds	4		



Dimension Guide



Whirlpool® Top Load Washer with Deep Fill option

WTW8507TW
WTW8507TR
WTW8507TL
WTW8509TW
WTW8509TR
WTW8509TL

DETAILED PLANNING DIMENSIONS


WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Safety and Installation Instructions or Product Guide, before installing and operating this appliance.

Electrical Requirements		
WTW8507TW WTW8507TR WTW8507TL WTW8509TW WTW8509TR WTW8509TL	5.3 cu. ft. DOE (US)	6.1 cu. ft. IEC (CAN)
Minimum Circuit Amperage Rating	15 A	
Operating Voltage	120 V - AC only	
Operating Frequency	60 Hz	

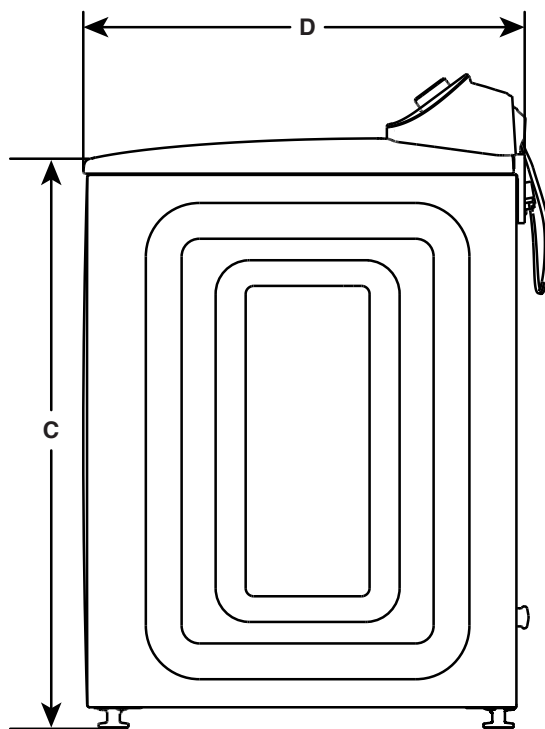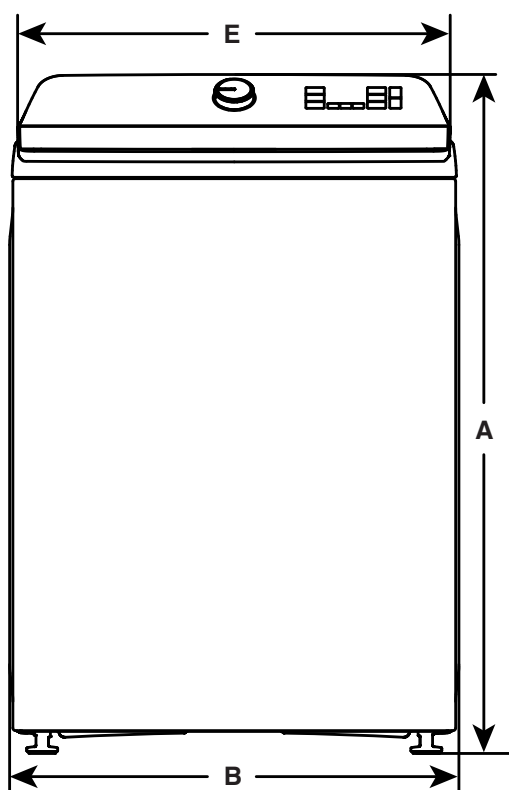

Product Dimensions					
WTW8507TW WTW8507TR WTW8507TL WTW8509TW WTW8509TR WTW8509TL		5.3 cu. ft. DOE (US)		6.1 cu. ft. IEC (CAN)	
		in (min)	mm (min)	in (max)	mm (max)
A	Height (with feet)	41¼	1048	42⅞	1070
B	Width	27⅜	695	-	-
C	Top of Lid Height (with feet)	36⅞	937	37¾	959
D	Depth	27⅞	708	28¾	730
E	Width of Lid	26⅞	670	-	-


DETAILED PLANNING DIMENSIONS

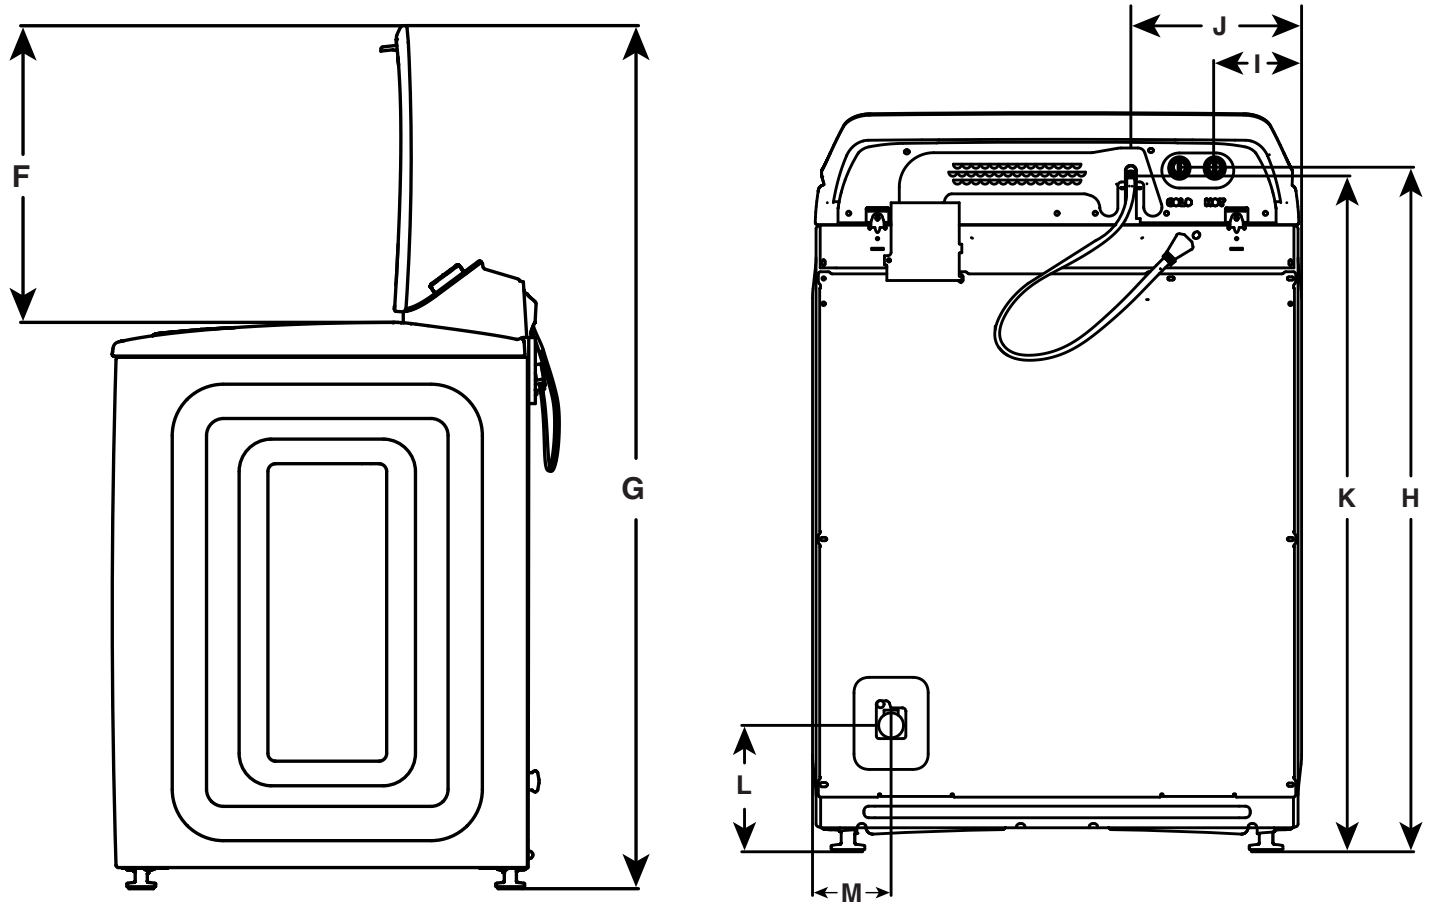

Product Dimensions					
WTW8507TW WTW8507TR WTW8507TL WTW8509TW WTW8509TR WTW8509TL		5.3 cu. ft. DOE (US)		6.1 cu. ft. IEC (CAN)	
		in (min)	mm (min)	in (max)	mm (max)
F	Height of Lid	20½	521	-	-
G	Height with Lid Open	57⅝	1464	58½	1486
H	Water Inlet Valves Height	38¼	972	39⅞	994
I	Water Inlet Valves from Side	6⅞	175	-	-
J	Power Cord from Side	9⅝	244	-	-
K	Power Cord Height	37⅞	962	38¾	984
	Power Cord Length	62¼	1581	-	-
L	Drain Hose Outlet Height	7⅞	181	8	203
M	Drain Hose Outlet from Side	4½	114	-	-
	Drain Hose Length	53½	1359	-	-
	Diameter of Drain Hose	1	25	-	-

DETAILED PLANNING DIMENSIONS

Recessed area or closet installation

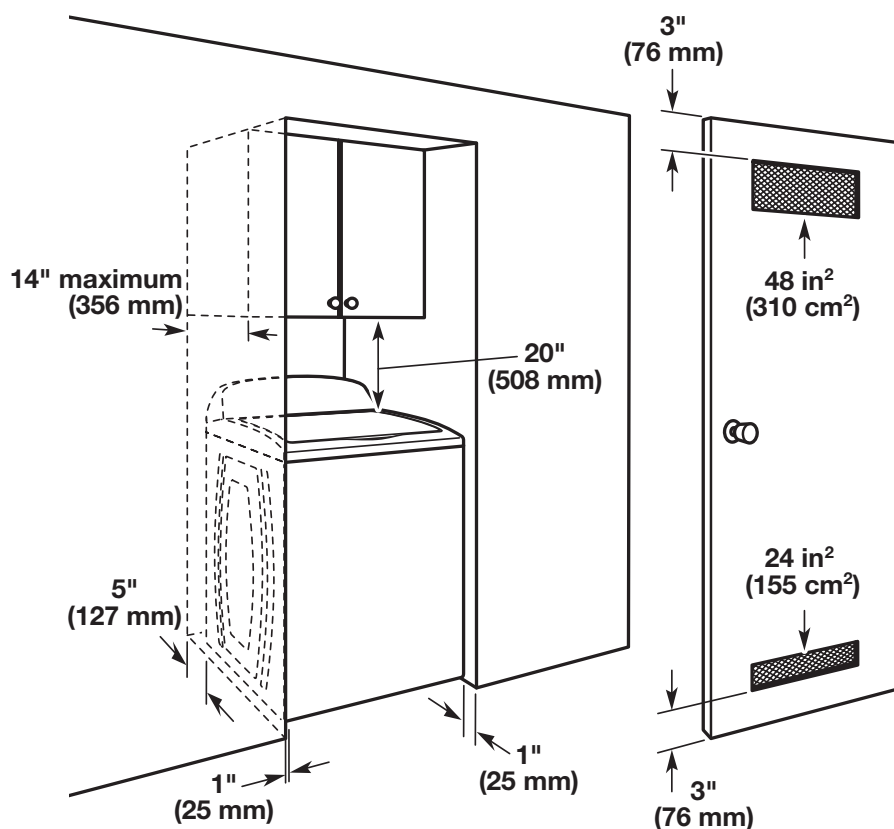

Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.



Guide de dimensions

**Laveuse à chargement par le dessus de avec
option Deep Fill (grand remplissage) Whirlpool®**

WTW8507TW

WTW8507TR

WTW8507TL

WTW8509TW



WTW8509TR

WTW8509TL

DIMENSIONS DE PLANIFICATION DÉTAILLÉES


AVERTISSEMENT : Pour réduire le risque d'incendie ou le guide du produit, de décharge électrique ou de blessures, lire les INSTRUCTIONS IMPORTANTES DE SÉCURITÉ et INSTRUCTIONS D'INSTALLATION du guide d'instruction de sécurité et d'installation ou le guide du produit de votre appareil avant d'installer et de faire fonctionner cet appareil.

Spécifications électriques		
WTW8507TW WTW8507TR WTW8507TL WTW8509TW WTW8509TR WTW8509TL	5,3 pi³ DOE (É.-U.)	6,1 pi³ IEC (CAN)
Courant minimum du circuit	15 A	
Tension de fonctionnement	120 V CA seulement	
Fréquence de fonctionnement	60 Hz	

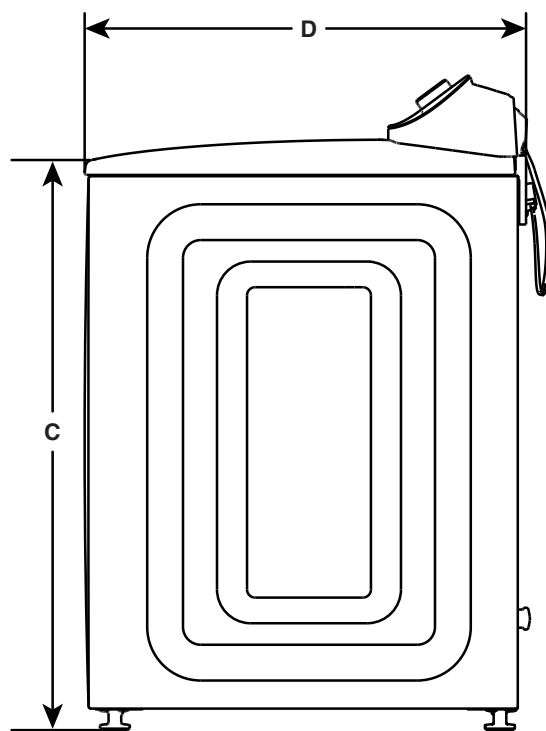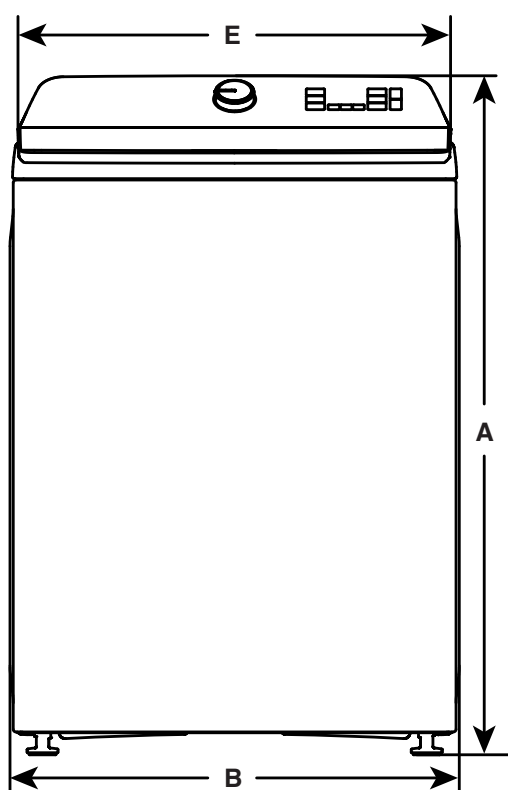

Dimensions du produit					
WTW8507TW WTW8507TR WTW8507TL WTW8509TW WTW8509TR WTW8509TL		5,3 pi³ DOE (É.-U.)		6,1 pi³ IEC (CAN)	
		po (min)	mm (min)	po (max)	mm (max)
A	Hauteur (avec pieds)	41 ¼	1048	42 ½	1070
B	Largeur	27 ¾	695	-	-
C	Hauteur à partir du haut du couvercle (en pieds)	36 ⅞	937	37 ¾	959
D	Profondeur	27 ⅞	708	28 ¾	730
E	Largeur du couvercle	26 ¾	670	-	-


DIMENSIONS DE PLANIFICATION DÉTAILLÉES

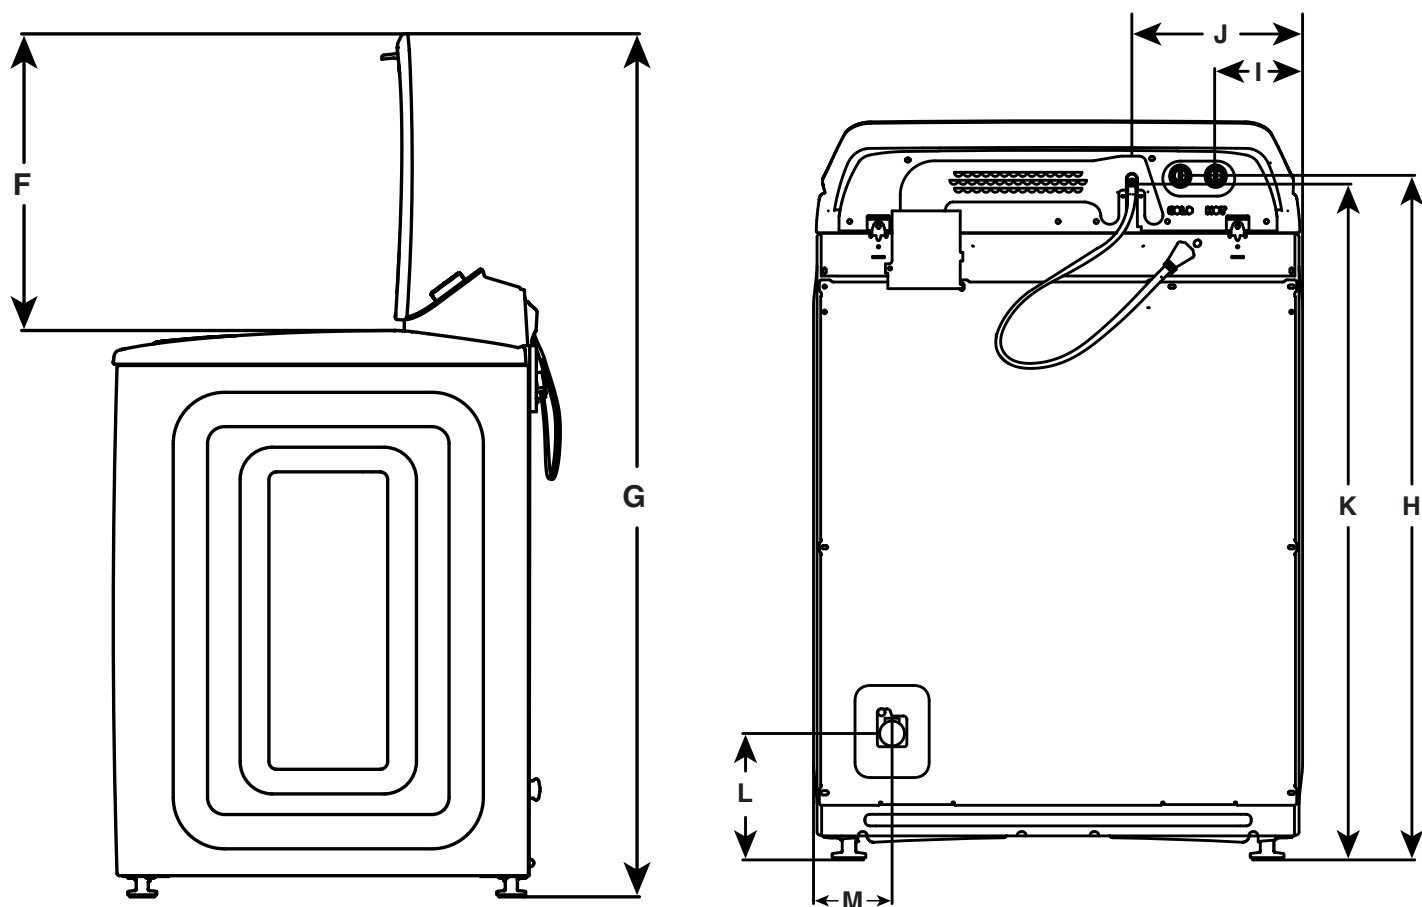

Dimensions du produit					
WTW8507TW WTW8507TR WTW8507TL WTW8509TW WTW8509TR WTW8509TL		5,3 pi³ DOE (É.-U.)		6,1 pi³ IEC (CAN)	
		po (min)	mm (min)	po (max)	mm (max)
F	Hauteur du couvercle	20 ½	521	-	-
G	Hauteur avec couvercle ouvert	57 ⅝	1464	58 ½	1486
H	Hauteur des vannes d'admission d'eau	38 ¼	972	39 ⅞	994
I	Vannes d'admission d'eau de côté	6 ⅞	175	-	-
J	Cordon d'alimentation de côté	9 ⅝	244	-	-
K	Hauteur du cordon d'alimentation	37 ⅞	962	38 ¾	984
	Longueur du cordon d'alimentation	62 ¼	1581	-	-
L	Hauteur de sortie du tuyau de vidange	7 ⅞	181	8	203
M	Sortie du tuyau de vidange de côté	4 ½	114	-	-
	Longueur du tuyau de vidange	53 ½	1359	-	-
	Diamètre du tuyau de vidange	1	25	-	-

DIMENSIONS DE PLANIFICATION DÉTAILLÉES

Installation dans un encastrement ou un placard

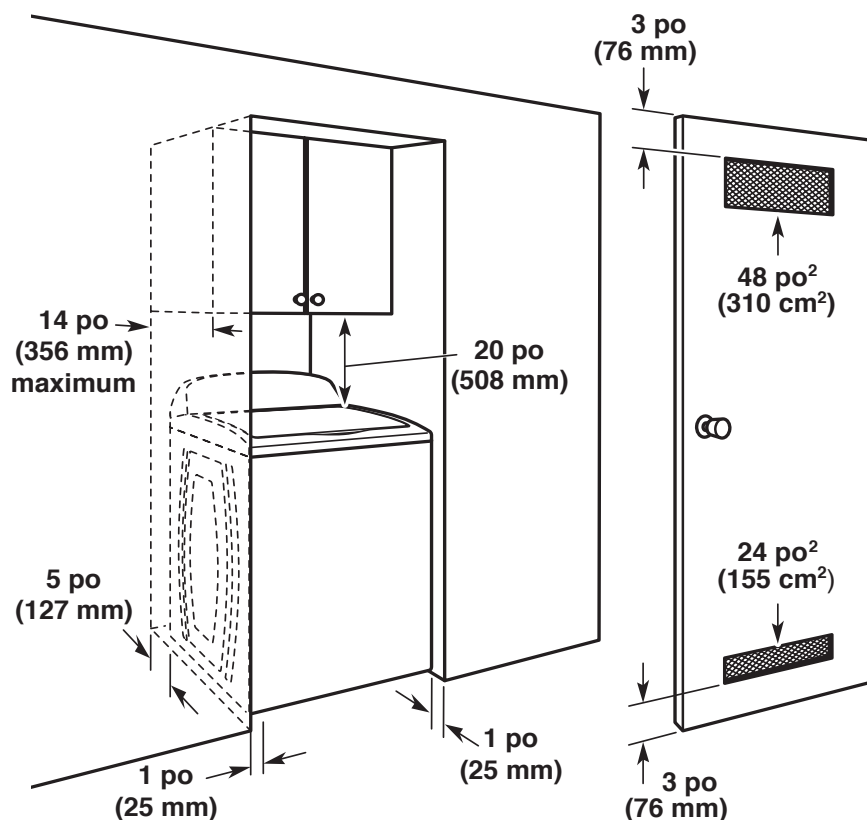

Les dimensions représentent les dégagements recommandés permis, hormis pour les ouvertures de ventilation de la porte de l'armoire qui correspondent aux dimensions minimales nécessaires.

Cette laveuse a été testée pour une installation avec dégagement de 0 po (0 mm) sur les côtés. On peut éventuellement laisser davantage de dégagement pour faciliter l'installation et l'entretien, ainsi que des distances de séparation pour les appareils ménagers voisins et des dégagements pour les murs, portes et plinthes. Ajouter un espace supplémentaire de 1 po (25 mm) de tous les côtés de la laveuse pour réduire le transfert de bruit. Si l'on installe une porte de placard ou une porte à persiennes, des ouvertures d'aération au sommet et au bas de la porte sont nécessaires.