ARTONA

PVD

Faucet Specifications

Color	SKU
PVD Steel	442037

Product Features

- Pull-down, insulated handspray with dual selectable spray patterns
- 175° swivel for optimal range of motion
- Solid brass construction
- Ceramic disc cartridge
- 1.5 GPM (Gallons Per Minute) flow rate

Planning information


- 1 ⅜'' diameter drilled faucet hole required for installation

What is included


- Color-coded hot and cold supply lines
- ⅜'' compression fittings
- All faucet parts required for installation

Codes & Standards


- ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61, NSF/ANSI 372 listed, AB 1953, AB 100, CEC, CalGreen, George SB 370

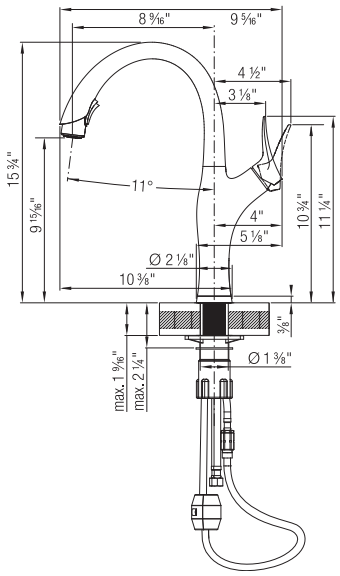

Side view

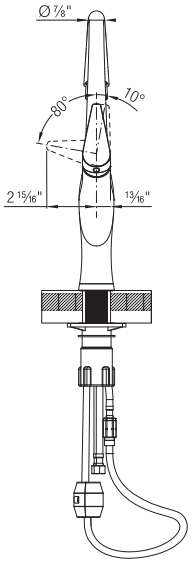

Side view lever



Swivel range

Warranty
BLANCO offers a limited lifetime warranty on all sinks and faucets, as well as a one-year warranty on all custom accessories.

Code/Standards Compliance
BLANCO sinks and faucets are third-party tested and certified to standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.

View our how-to videos to learn more about installing and caring for BLANCO products:
BLANCO how-to videos

Questions? Contact us today

BLANCO America, Inc.
110 Mount Holly By-Pass
Lumberton, NJ 08048

Phone: 888-668-6201
Fax: 609-668-6211

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.