

# **30 INCH PRO-STYLE GAS RANGE**

## **BGRP34520SS / BGRP34520CSS**

# **Contemporary European Design**

Winner of the prestigious iF Design award, Blomberg ranges bring sophistication, thoughtfulness, and cutting-edge technology to the kitchen, harmonizing elegance with chef-worthy functionality with the effortless style your upscale home deserves. This balance is evident in every feature, from the sleek oven handle and sculpted ergonomic knobs to the beautiful LED lights under the bullnose that illuminate the controls and programmable electronic timer.



# **In Harmony with Your Life**



### 20,000 BTU Burner

Ingenious Blomberg technology can actually help you refine your culinary skills! Flexible-power burners offer pre-set options for more precise cooking at different temperatures. The 20,000 BTU setting delivers high heat to speed up preparation with a fast boil or sizzle. Switching to the 675 BTU setting automatically adjusts to gentler heat, ideal for simmering delicate sauces, melting chocolate, or cooking fluffy rice like an expert.



### Programmable Self-Clean Oven

Time is the ultimate luxury, and Blomberg ranges protect yours with high-tech programmable self-cleaning oven technology that lets you set exactly the right cycle. Set it for three hours, four hours, or five hours depending on the level of cleaning required. There's no need to scrub hard-to-reach surfaces, scrape up stubborn spills, or use harsh chemicals. At the end of the cycle, simply wipe away ash with a cloth.



### **Industry-leading Oven Capacity**

Blomberg knows you can never have too much room in your oven, especially when you're entertaining. That's why we feature the largest oven capacity available in a 30-inch range, with 5.7 cu. ft. of cooking space to accommodate everything from holiday roasts to full-size commercial baking sheets. Dual interior lights and a large viewing window make it easy to monitor what's cooking.



#### **Auto Re-Ignition**

Blomberg ranges are designed to be intelligent as well as stylish and efficient. Safety is built in, with automatic re-ignition should a gust of wind, a spill, or a boil-over extinguish the burner flame at any time during cooking.



# **30 INCH PRO-STYLE GAS RANGE**

# **BGRP34520SS / BGRP34520CSS**



## Cooktop

5 gas burners

20,000 Btu power burner with simmering Oval shaped center burner

Auto re-Ignition

Easy to clean enamel burner plate Electronic ignition knob integrated Cast iron continuous pan supports

## Range

Convection cooking
Self-clean oven
Industry leading oven capacity 5.7 cu. ft.
Sabbath mode
Bull nose lighting
Cool touch door
3 Wire heavy duty racks
Gas safety valve
Full extension telescopic rack
Easy to clean enamel oven interior
Interior lighting
Adjustable feet
LPG conversion kit

## **Accessories**

Griddle optional Side trim kit optional Island trim included

## **Dimensions**

H x W X D: 37 ½"x 29 13/16" x 29 5/16" Height includes 1 ½" for back guard Depth includes knobs & handle


GENERAL	BGRP34520SS / BGRP34520CSS
Type	Freestanding 30"
Size Color	Stainless Steel
Side Walls	Black
Control type	Knob control with multi functions
FUNCTIONS	
Multi-dimensional Cooking	No
Convention Cooking	Yes
Bottom Heater Convection	Yes Yes
Broiler	Yes
Broil	Gas
Convection broiler	Yes
Convection roast	Yes
True European convection	No
SPECIAL FEATURES 12/24-hour clock format	
Splash Back	- Optional
Island Trim	Included
Simmering	Yes
Cooling Fan	No
Cavity Enameling Color	Black
Oven Lights Adjustable Feet	2 x Halogen Yes
Anti-tip (tilting) bracket	Yes
Bottom Compartment	No
Fuel Type	NG
LPG Conversion Kit	Yes
OVEN DOOR(S)	
Oven Glass Window	"O" Shaped Metal + Glass
Door Cooling System  Net Capacity cu. ft.	Cool Door -4 Pane Heat Resistant Glass(fixed) 5.7 cu. ft.
Bottom Heating Element Wattage	-
Upper Heating Element Wattage	-
Convection Element Wattage	-
Low Grill (Broil)	-
Grill (Broil) ACCESSORIES / OVEN CAVITY	-
Rack Positions	Stay in self clean – 6 levels
Telescopic Pull-out Shelf System	1 Level (Full Extension)
Pyrolytic Self Cleaning	Yes
Sabbath Mode	Yes
Broiler Pan	1 V-2
Wok adapter Chromed racks	Yes 3
COOKTOP	<u> </u>
Zone Configuration	5 Gas
Front Left	12,500 BTU
Rear Left	4,000 BTU
Front Right	20,000 BTU
Rear Right	8,000 BTU
Rear Right Central	8,000 BTU 10,000 BTU
Rear Right Central Pan Support Type	8,000 BTU
Rear Right Central	8,000 BTU 10,000 BTU Continuous cast iron
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven	8,000 BTU 10,000 BTU Continuous cast iron 3
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in)	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire 36" x 30" x 25 1/2"
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire 36" x 30" x 25 1/2" 37 ½"
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire 36" x 30" x 25 1/2" 37 1/2" 29 13/16"
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width Overall dim - depth	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire 36" x 30" x 25 1/2" 37 1/2" 29 13/16" 29 5/16"
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire 36" x 30" x 25 1/2" 37 1/2" 29 13/16"
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire  36" x 30" x 25 1/2" 37 1/2" 29 13/16" 29 5/16"
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire  36" x 30" x 25 1/2" 37 '/
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire 36" x 30" x 25 1/2" 37 '/2" 29 13/16" 29 5/16" 270 lbs./122.5 kg
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable INSTRUCTIONS FOR USE	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire  36" x 30" x 25 1/2" 37 1/2" 29 13/16" 29 5/16" 270 lbs./122.5 kg  110-120 V 60 Hz USA-Canada Yes
Rear Right Central Pan Support Type Pan Support Quantity Gas Safety Device for hob Gas Safety Device for oven DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - width Overall dim - depth Weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable	8,000 BTU 10,000 BTU Continuous cast iron 3 Re-ignition Hot-wire  36" x 30" x 25 1/2" 37 ½" 29 13/16" 29 5/16" 270 lbs./122.5 kg  110-120 V 60 Hz USA-Canada




# **30 INCH PRO-STYLE GAS RANGE**


# **BGRP34520SS / BGRP34520CSS**

# **Dimensions and Installation**

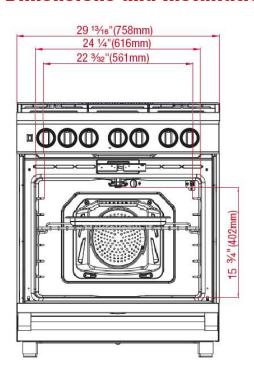


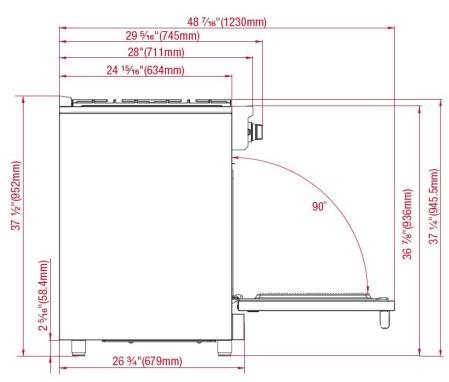

#### Electrical







NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.us or call 888 352 2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.