



Vario 400 series flex induction cooktop VI 492

VI 492 613
Stainless steel frame.
Black glass ceramic.
Width 36" (90 cm).

Installation accessories

In combination of several Vario cooktops, connecting strips must be used. Choose respective VA 420 strip from one of the below, depending on type of installation.

VA 420 004

Invisible connection strip for combination with other Vario 400 series flush mounting.

VA 420 010

Connection strip for combination with other Vario 400 series for surface mounting.

Optional accessories

CA 051 301

Teppan Yaki plate made of multi ply material. For flex induction cooktop.

CA 052 300

Griddle plate in cast aluminum. Non-stick. For flex induction cooktop.

CA 050 300

Flex Pan set, 3 pcs. Non-stick coating. For flex induction cooktop.

CA 055 300

Flex Pan large Non-stick coating. For flex induction cooktop.

Part No. 17006018

Stainless steel frying sensor pan. Non-stick coating, ø 6"

Part No. 17006184

Stainless steel frying sensor pan. Non-stick coating, ø 7".

Part No. 17006185

Stainless steel frying sensor pan. Non-stick coating, ø 8".

Part No. 17006019

Stainless steel frying sensor pan. Non-stick coating, ø 11".

WP 400 001

Wok pan made of multiple-layer material with round bottom and handle ø 14 3/16", 6.3 qt., height 4".

WZ 400 000

Wok support ring for wok pan. For use with VI 414 Vario induction wok and VI 492 Vario flex induction cooktop only.

Additional connection cables for connecting the electronic control knobs (optional)

Part no. 12013604

1 ft (0.3 m) connection cable

Part no. 12013606

3 3/8" ft (1 m) connection cable

Part no. 12013607

5 ft (1.5 m) connection cable

Combinable with:

AL 400 792
AW 442 720
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights

- Flex function for combining the rectangular cooking areas.
- Free positioning of cookware inside combined cooking areas.
- Frying sensor function for temperature control in pans.
- Large cooking zone for pots up to ø 13".
- Ideal for round-bottomed wok using wok ring attachment.
- Easy control of all functions with bi-coloured display.
- Solid stainless steel control knobs.
- Precision crafted 1/8-inch stainless steel frame.
- For surface-mount installation with a visible edge or for flush installation.
- Can be perfectly combined with other Vario 400 series appliances.

Cooking zones

2 flex induction cooking zones
7 1/2" x 9" (2200 W, with booster 3,700 W), linked together 15" x 9"
(3300 W, with booster 3,700 W).
2 flex induction cooking areas
7 1/2" x 9" (2200 W, with booster 3600 W), linked together 15" x 9" (3300 W, with booster 3600 W).
1 induction cooking zone ø 8 1/4" (21 cm) (2200 W, with booster 3700 W), automatically switches to ø 10 1/4" (26 cm) (2600 W, with booster 3700 W) and to ø 12 5/8" (3300 W, with booster 3700 W).

Operation

Control knobs with illuminated ring, cooking zone and output level markings.
Electronic power control in 12 output levels (0 Cooking zone off
Heat setting 1 Lowest setting
Heat setting 12 Highest setting).
User friendly control with bi-colored display (white / orange).

Features

Flex function for rectangular cooking areas.
Frying sensor function.
Booster function.
Stopwatch.
Short-term timer.
Options menu.
Power management.

Home network integration for digital services (Home Connect) wireless via WiFi.

The use of the Home Connect functionality depends on the Home Connect services, which are not available in every country. For further information please check: home-connect.com.

Safety

Operation indicator.
Pot detection.
Digital 2 stage residual heat indicator
Safety shut-off.

Planning notes

Depending on the type of installation — surface- or flush-mounted — the specific location of the cut-out and the control knob positions may vary. The horizontal positioning of the knobs may be aligned with the specific cooking areas and zones. The drawing "Installation of the control knob" must be observed if the panel is more than 1" thick (there must be a recess at the rear).

In a combination of several Vario 400 series cooktops a connection strip VA 420 must be used.

Depending on the type of installation — surface- or flush-mounted — the respective VA 420 connecting strip must be used.

For flush installation the edge height in the cut-out needs to be at least 1/2" and for surface-mount 3/8". Ensure a continuous cut surface of 90°.

The weight capacity and stability, especially in case of thin countertops, must be supported using suitable substructures. Take the appliance weight and additional loads into account.

Flush installation is possible in countertops made of stone, synthetics or solid wood. Heat resistant and watertight sealing of the edges must be observed. For a suitable heat resistant filler please consult with your countertop manufacturer.

Minimum countertop thickness 3/4" (20 mm) for surface mounted installation. Minimum countertop thickness 1 1/8" (30 mm) for flush installation.

The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured.

Do not use discontinuous lining.

The joint width may vary due to size tolerances of the combinations and of the countertop cut-out.

If installing several Vario products in individual cut-outs allow for a minimum distance of 2" in between the cooktops.

Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of flat bottom cookware is recommended.

Immersion depth depending on installation situation, 2 5/8" for surfacemount or 2 3/4" for flush-mount. A combination with VL 414 downdraft is not recommended due to insufficient air extraction from the center zone.

To insure that the appliance works correctly, the cooktop must be sufficiently ventilated either from the rear or base of the cabinet. Please see the installation instructions for further detail.

Appliance can be snapped into the countertop from above.

Appliance weight: approx. 46 lbs.

Rating

Rating: 9,360 W (208 / 220 V) / 10,800 W (240 V).


Minimum fuse protection: 47 A.

Electrical: 208 / 220-240 V / 60 Hz.

Electrical connection:


Hardwire required, 59" cable length.

Surface-mount Installation

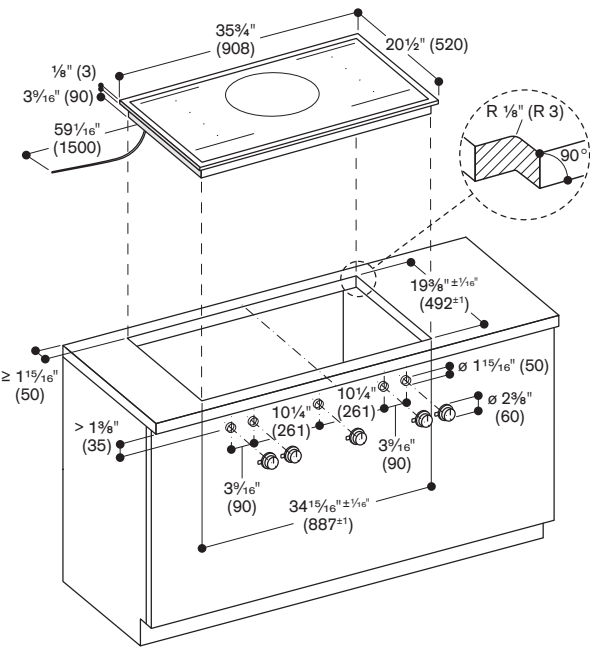


Minimum countertop thickness 3/4" (20 mm) for surface mounted installation.
See separate planning notes on page 104.

Installation of the control knob; surface-mount installation

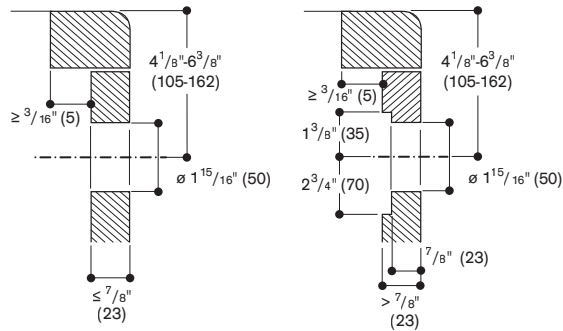


Numbers indicated inside parenthesis () = mm

Flush-mount Installation

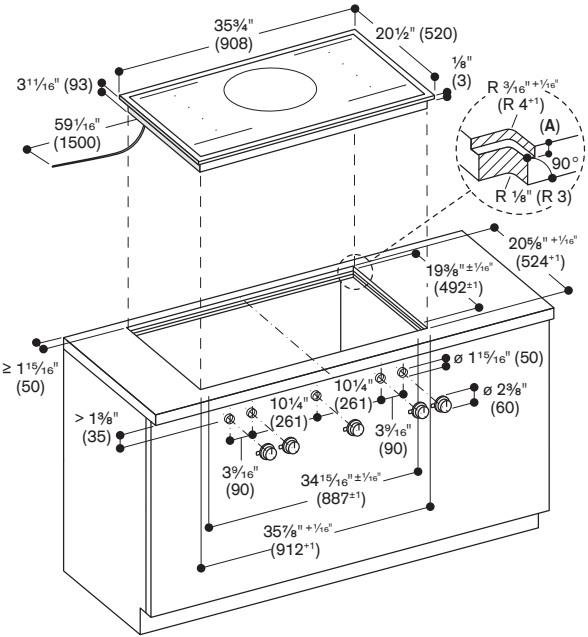


Minimum countertop thickness 1 3/16" (30 mm) for flush installation.
See separate planning notes on page 106.

Longitudinal section

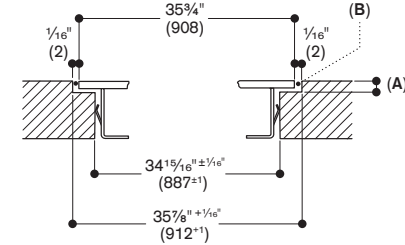

A: 1/8" (3.5^{0.5})
B: Fill with silicone

Cross-section

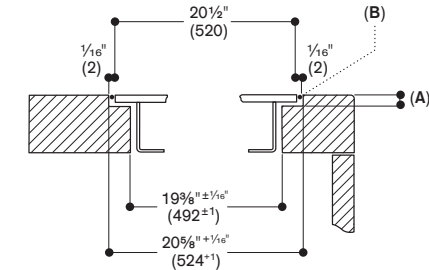

A: 1/8" (3.5^{0.5})
B: Fill with silicone