



Combination of GO 48X with VG 295

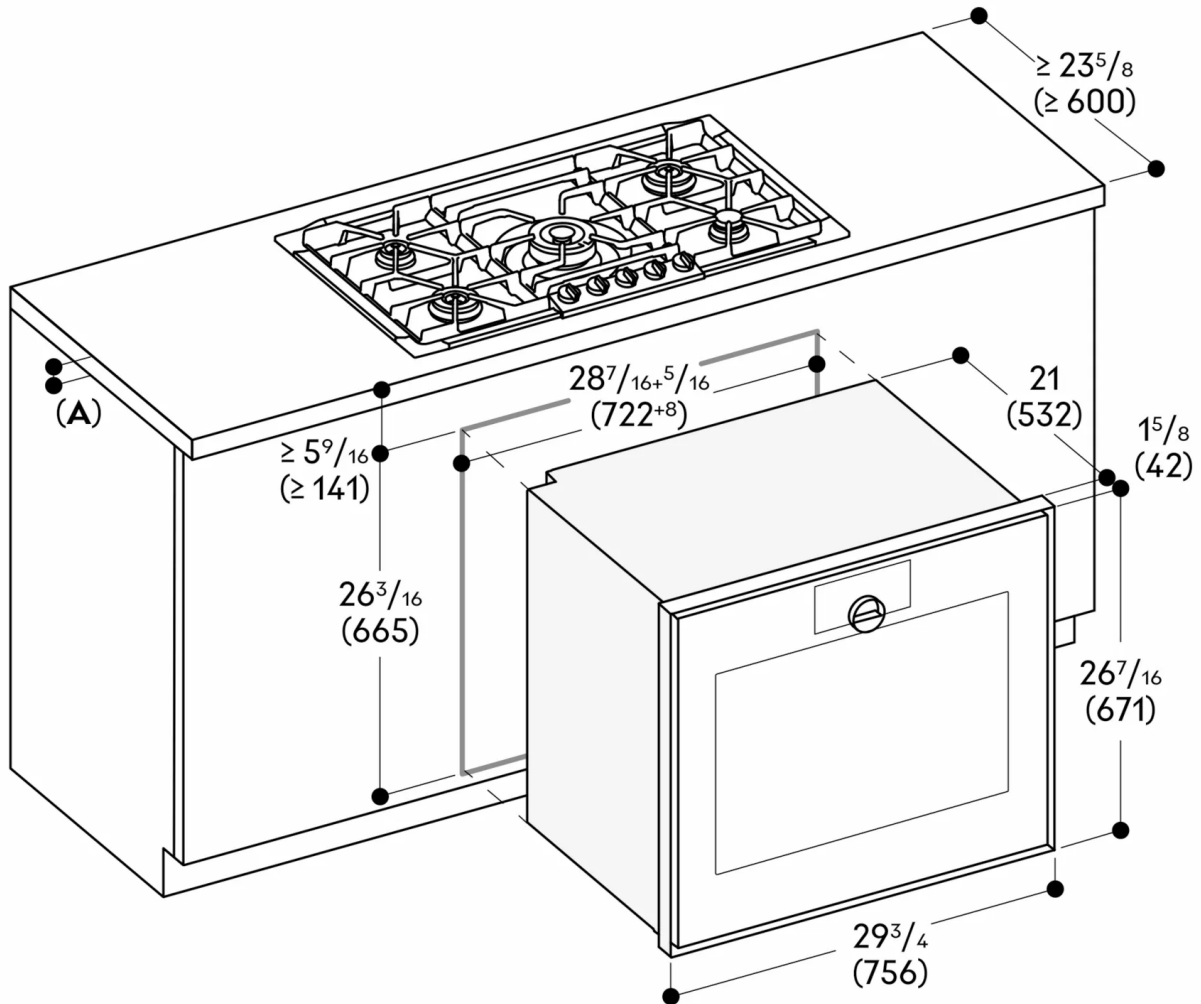

A: Min. countertop thickness $\frac{3}{4}$ " (20 mm) for surface-mounted installation

Measurements in inches (mm)


Combination of GO 48X with CX 482

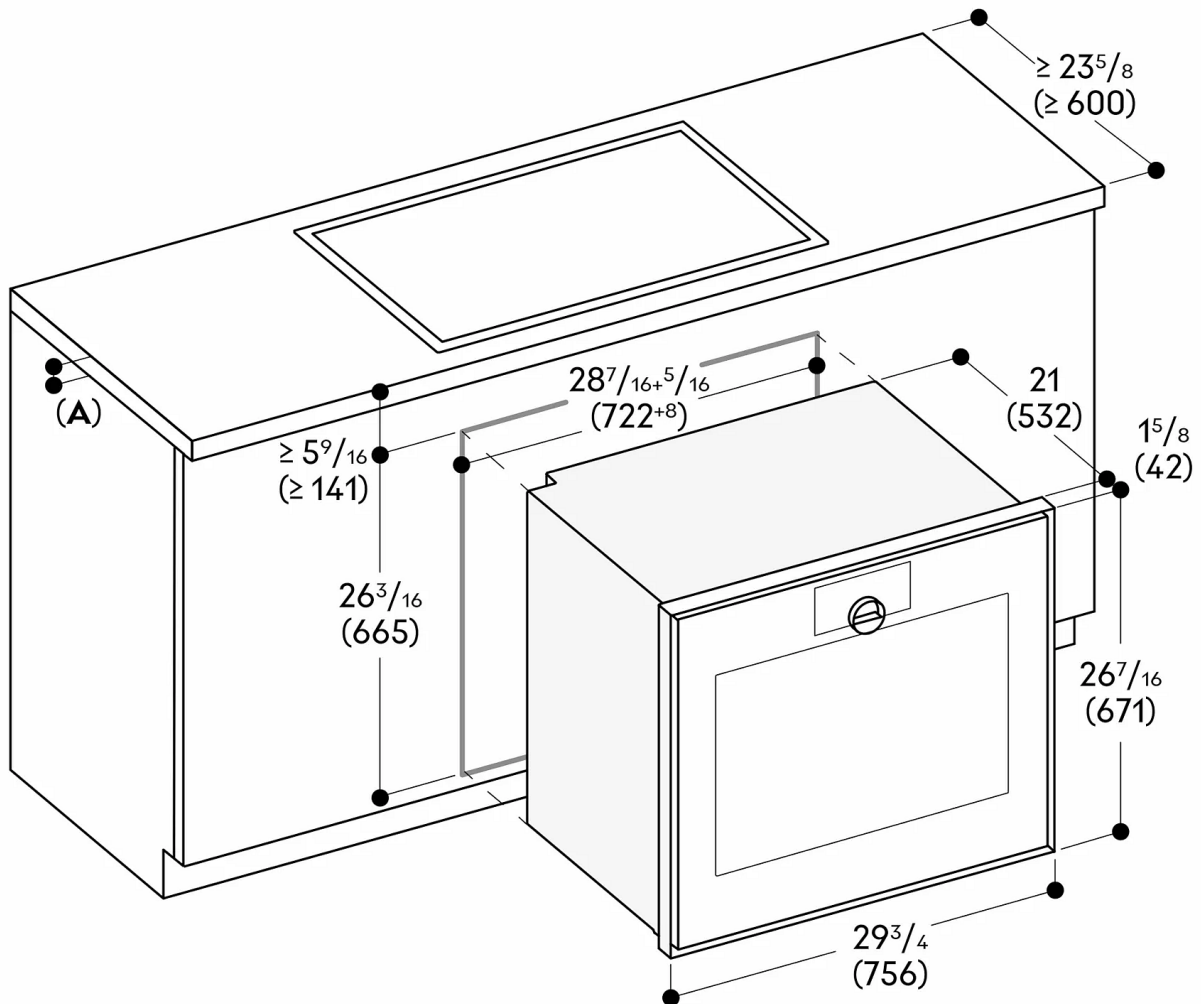

A: Min. countertop thickness $\frac{3}{4}$ " (20 mm) for surface mounted installation,
 $1\frac{3}{16}$ " (30 mm) for flush installation

Measurements in inches (mm)

Combination of 2× GO 48X with VG 415 / 2× VG 425 / VP 414

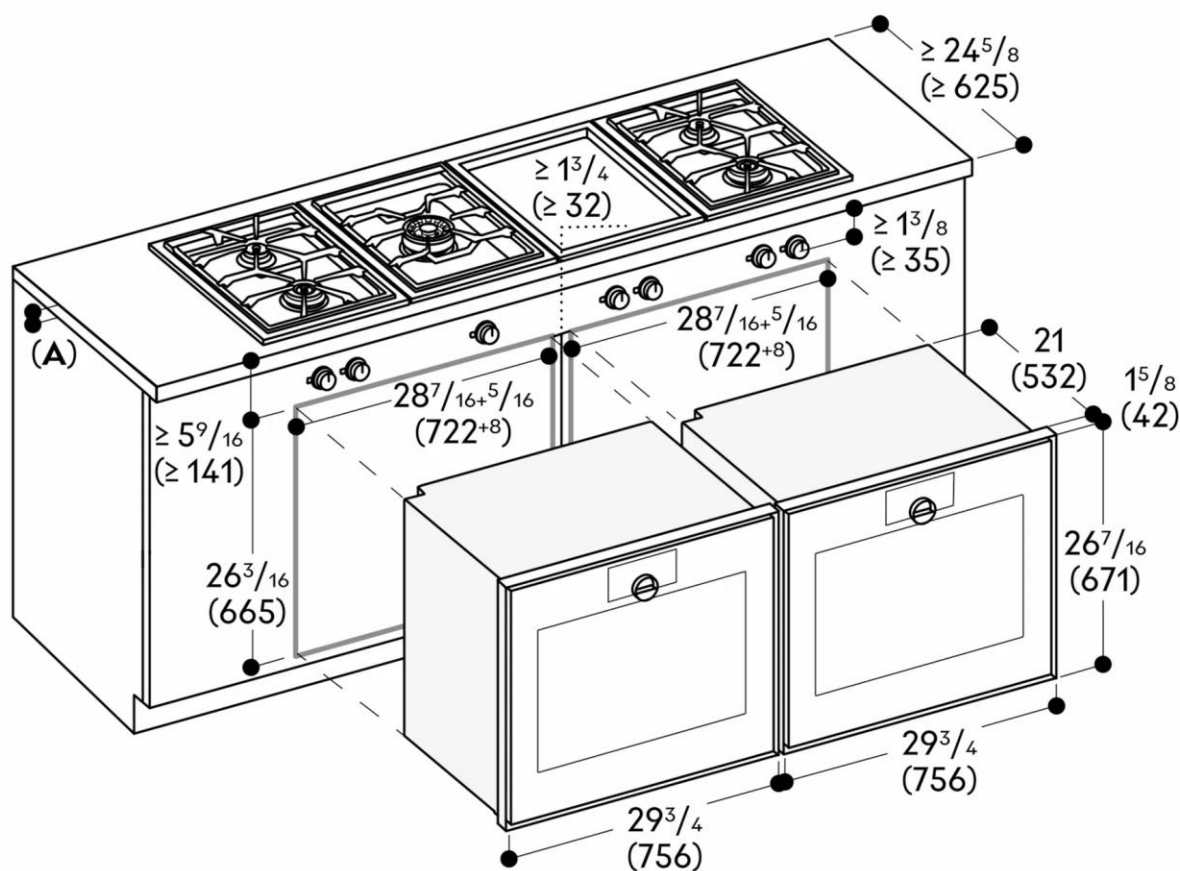

A: Min. countertop thickness $\frac{3}{4}$ " (20 mm) for surface mounted installation, $\frac{13}{16}$ " (30 mm) for flush installation

Measurements in inches (mm)