

24" WARMING DRAWER

MATTEO 400 SERIES



DESCRIPTION

The Matteo 400 series push-to-open compact warming drawer, finished in fingerprint-resistant stainless steel, is the perfect addition to any kitchen, offering seamless integration with your existing appliances. Designed for flexibility, it pairs beautifully with the Matteo "compact wall oven column" when stacking other 24" built-in appliances. Alternatively, it can be installed beneath a matching built-in coffee machine to keep cups warm or positioned below a combi speed oven or combi steam oven. With its 24" x 24" footprint, this warming drawer is functional while optimizing space for a sleek, modern kitchen setup.

FEATURES

Knob Control
Push latch system to open and close the drawer
Heavy Duty full extension rails
True convection or Fan assisted heating system
Even heat distribution
All stainless steel structure
Warming Temperature range: min. 90 °F up to 160 °F (min. 30 °C up to 70 °C)

FUNCTIONS

Pre-heat dishes
Pre-heat coffee cups
Keep warm ready food
Defrosting
Leavening dough
Slow cooking min. 90 °F up to 160 °F (min. 30 °C up to 70 °C)


MODEL CODE

F4MWD24S1

-  Keep Warm
-  Defrost
-  Proofing
-  Push Opening
-  Slow Cooking
-  Sliding Telescopic Rails
-  Fingerprint-resistant Stainless Steel
-  Americans with Disabilities Act †

24" WARMING DRAWER

MATTEO 400 SERIES

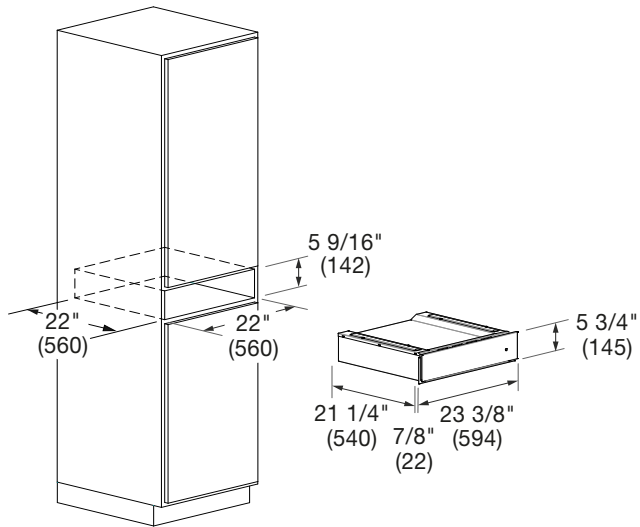

MODEL CODE	24" WARMING DRAWER F4MWD24S1	
GENERAL DETAILS		
Finish	Stainless Steel	
Control Type	Electronic Knob	
Compatible Ovens	F7MSP24S1 - F7MSM24S1 - F7MSCO24S1 - F7MSPD24S1	
Temperature (max), °F (°C)	160	(70)
Thermostat, °F (°C)	90 - 160	(30 - 70)
CAPACITY		
Volume (each), cu. ft. (L)	0.53	(15)
Useable Width, in. (mm)	16-1/2	(420)
Useable Height, in. (mm)	3	(75)
Useable Depth, in. (mm)	18-7/8	(480)
DIMENSIONS / WEIGHT		
Product Width, in. (mm)	23-3/8	(594)
Product Height, in. (mm)	5-3/4	(145)
Product Depth, in. (mm)	21-1/4	(540)
Cutout Width, in. (mm)	22	(560)
Cutout Height (min), in. (mm)	5-9/16	(142)
Cutout Depth (min), in. (mm)	22	(560)
Net Weight, lbs. (kg)	29	(13)
POWER / RATINGS		
Max power absorbed (W)	400 W	
Power V (Hz)	120	(60)
Power Cable	NEMA 5-15P	
Power Cable Lenght, in. (mm)	53 1/8	(1350)
INSTRUCTIONS FOR USE		
Use & Care Manual / Installation Manual	English / French / Spanish	
WARRANTY		
Limited Warranty	Parts and Labor (2-year)	

† To achieve full ADA compliance, please consult the current ADA requirements for product installation instructions.