

Miele

36" Puristic Wall
Ventilation Hood

DA 6698 W



Shown: DA 6698 W over KM 3010
Please note: This information is subject to change.

mieleusa.com
Specification Sheets TRS 05292018

36" Puristic Wall Ventilation Hood

SPECIFICATIONS	
Canopy Dimensions	35 ³ / ₈ " (898mm) W x 3 ³ / ₈ " (85mm) H x 19 ¹¹ / ₁₆ " (500mm) D
Unit Height - Vented	28" — 40 ⁹ / ₁₆ " (710—1030mm) H
Unit Height - Recirculating	33 ¹ / ₁₆ " — 45 ¹¹ / ₁₆ " (840—1160mm) H
Fan	
Fan Speeds	4
Maximum CFM	625 CFM, (Reducing Collar is available to reduce Air flow to less than 400 CFM)
Duct	
Recommended Duct Diameter	6" (150 mm)
Electrical	
Electrical Requirements	120 V, 60 Hz, 15 Amps
Power Cord	Molded plug 2.5 ft (0.75m) NEMA 5-15
Electrical Rating	359 W (Blower: 350 W; Lighting: 3x3 W)
Optional Accessories	
Recirculating Kit	DUW 20
OdorFree Charcoal Filter	DKF 12-900
CFM Reducing Collar	R2000
Shipping	
Shipping Weight	57.2 lbs (26kg)
Shipping Dimensions	40 ¹ / ₈ " W x 26 ³ / ₁₆ " H x 25 ⁵ / ₈ " D
Support	
Call Miele	(800) 999-1360
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com




DA 6698 W
Item 28669850USA



DA 6698 W OBSW
Item 28669840USA

36" Puristic Wall Ventilation Hood

PRODUCT VIEW

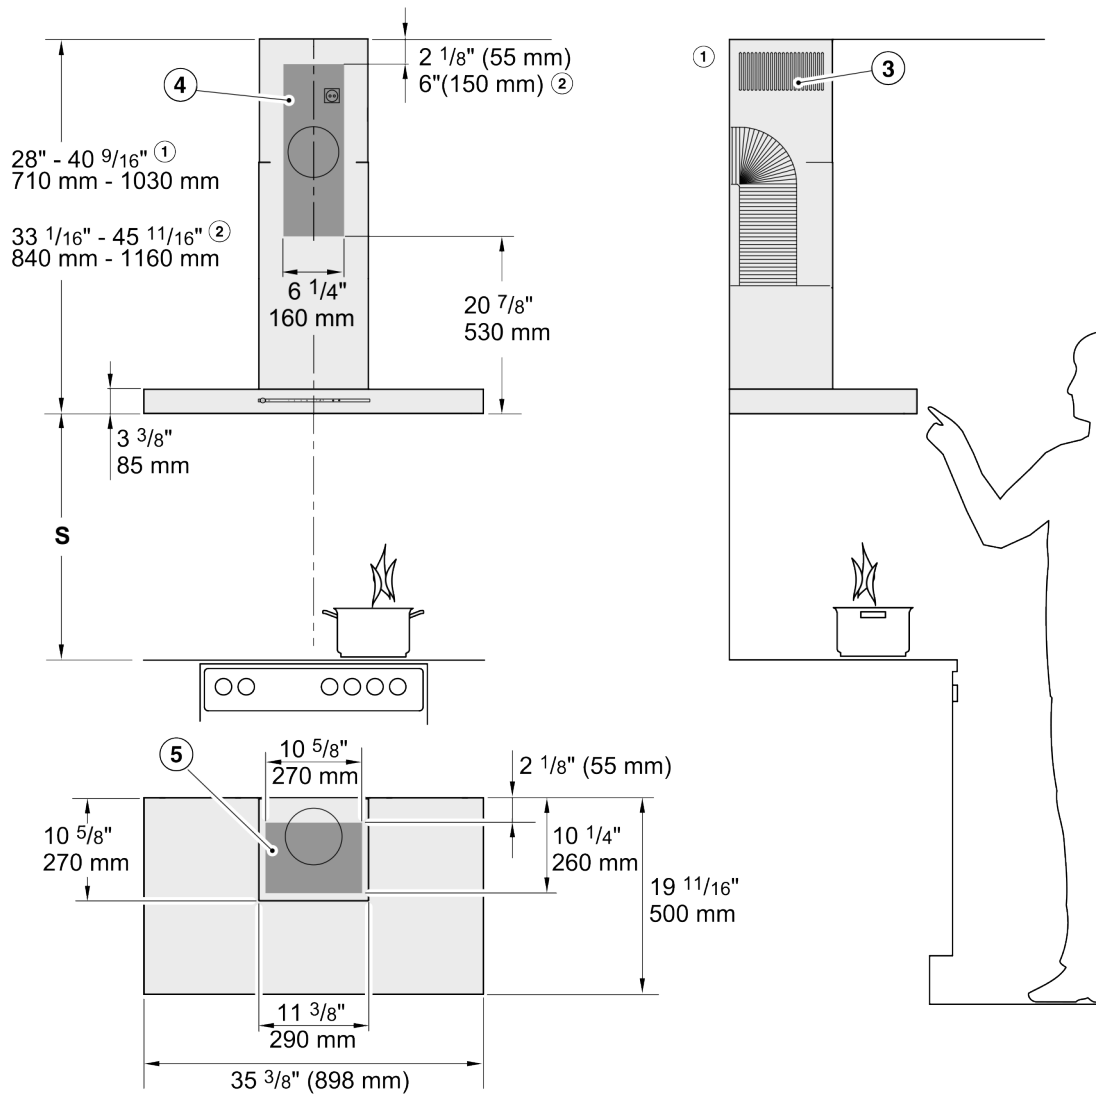

The drawing is not to scale.

- ① Extraction
- ② Recirculation
- ③ Air vent positioned at top for recirculation
- ④ ⑤ Mounting area (only ④ is required for recirculation hoods). Wall and ceiling area for exhaust duct opening and for wall socket installation. Only the wall socket installation is required for recirculation hoods.

Vent collar \varnothing 6" (150 mm), with adapter \varnothing 5" (125 mm).

PLEASE NOTE: The majority of the weight of the installed ventilation system will be supported by the lower retaining plate. It must be firmly attached to the stud framing behind the drywall. If studs are not available in the required locations, a plywood backing (min. 1/2" (13 mm) thick) spanning at least two studs must be installed. Failure to adequately support the weight as stated may result in the ventilation system falling off the wall, causing personal injury and property damage.

36" Puristic Wall Ventilation Hood

INSTALLATION SPECIFICATIONS

Distance Between Cooktop and Ventilation Hood (S)

Provided a larger distance is not given by the manufacturer of the cooktop, follow the minimum safety distances between a cooktop and the bottom of the hood.

Please also observe the information contained in the "IMPORTANT SAFETY INSTRUCTIONS" section.

Cooking appliance	Minimum distance S	
	Miele appliance	Non-Miele appliance
Electric Cooktops	24" (610 mm)	
Electric Barbeques and Fryers	26" (660 mm)	
Multiburner Gas Cooktops ≤ 43,000 BTU/hr (12.6 kW), no burner > 15,000 BTU/hr (4.5 kW).	26" (660 mm)	30" (760 mm)
Multiburner Gas Cooktops ≤ 73,800 BTU/hr (21.6 kW), no burner > 16,500 BTU/hr (4.8 kW)	30" (760 mm)	
Multiburner Gas Cooktops > 73,800 BTU/hr (21.6 kW), or one of the burners > 16,500 BTU/hr (4.8 kW)	Not possible	
Single Burner Gas Cooktops ≤ 20,500 BTU/hr (6 kW)	26" (660 mm)	30" (760 mm)
Single Burner Gas Cooktops > 20,500 BTU/hr (6 kW) ≤ 27,600 BTU/hr (8.1 kW)	30" (760 mm)	
Single Burner Gas Cooktops > 27,600 BTU/hr (8.1 kW)	Not possible	