
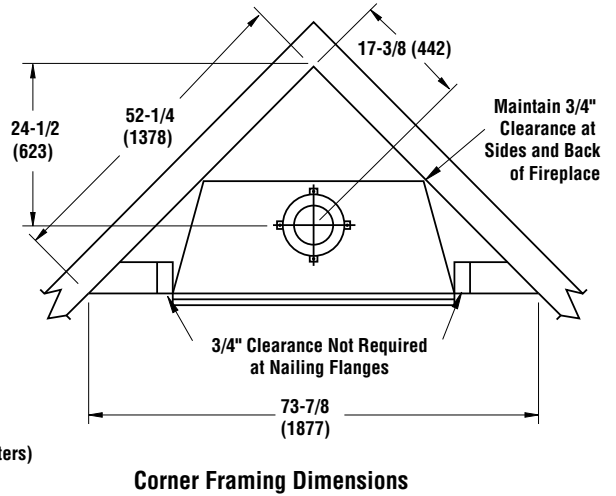





CRAFTSMAN™ 36 SERIES

WOOD-BURNING FIREPLACES

Framing Dimensions

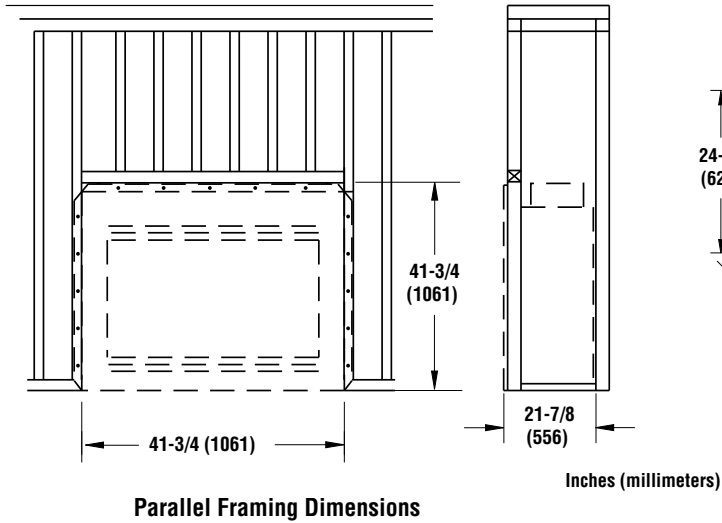

Fireplace Dimensions

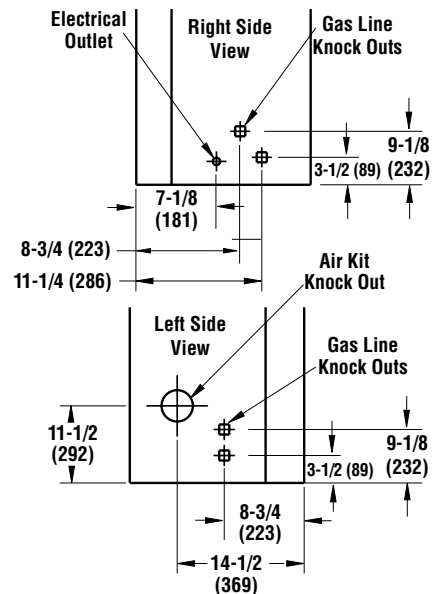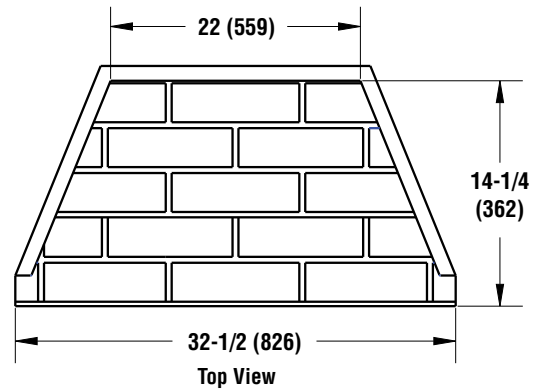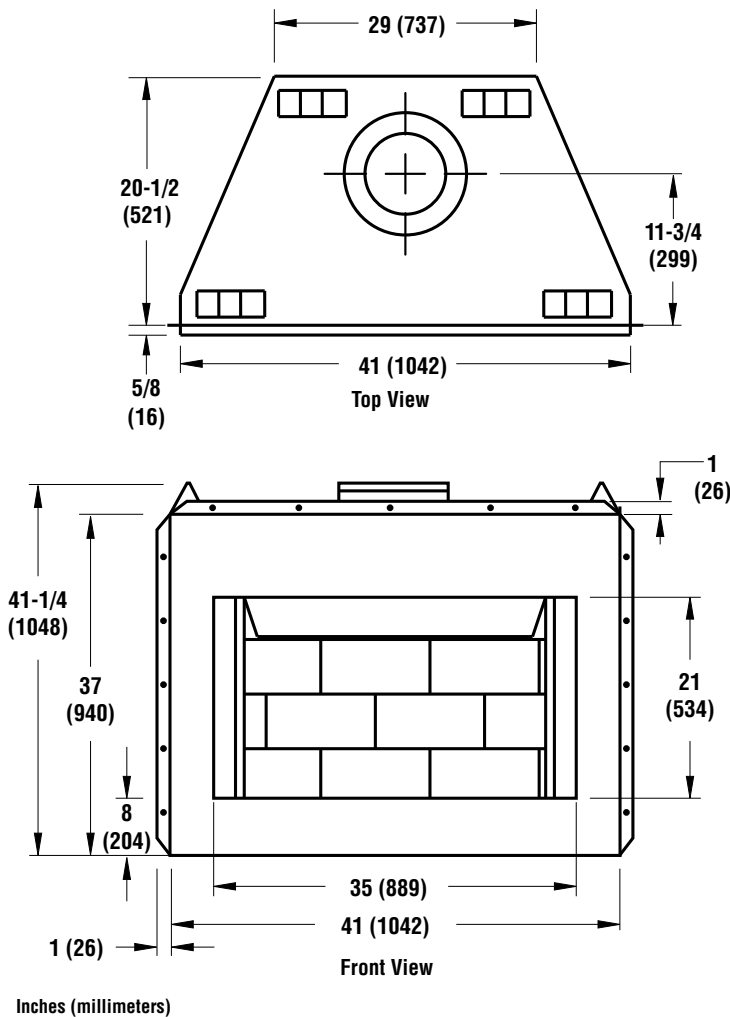

CRAFTSMAN™ 36 SERIES

Product Information

Product Reference Information					
Cat. No.	Model	Desc.	Interior	Shipping Weight	Shipping Volume
F0706	Craftsman36P2	Radiant	WS	184 lb.	23.8 cu. ft.
F0709	Craftsman36P2	Louver	WS	184 lb.	23.8 cu. ft.

Listing Information



Report No. 10-078


This fireplace has been tested and approved by PFS Corporation under UL127/ULC-S610 standard as a Factory Built Appliance and may be used with gas logs approved to ANSI Z21.60, Z21.84 or Z21.11.2 standards.

Clearances


Clearances to Combustibles	
Description	Min. Clearance
Ceiling	40 (1016)
Back and sides of fireplace	3/4 (19)*
Floor	0 (0)**
Perpendicular wall to opening	12 (305)
Top spacers	0 (0)
Chimney outer pipe surface	1 (26)

* Not required at nailing flanges

** See step 2 of Framing in the Installation and Operation Manual

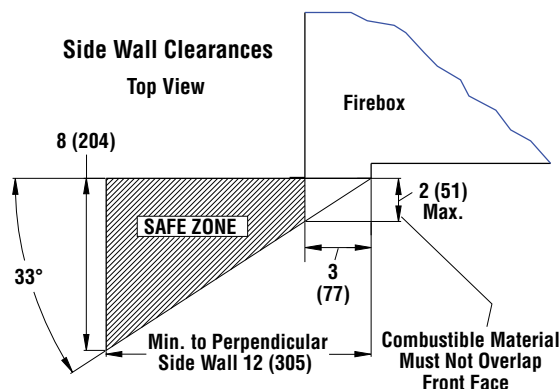

Mantel Clearances

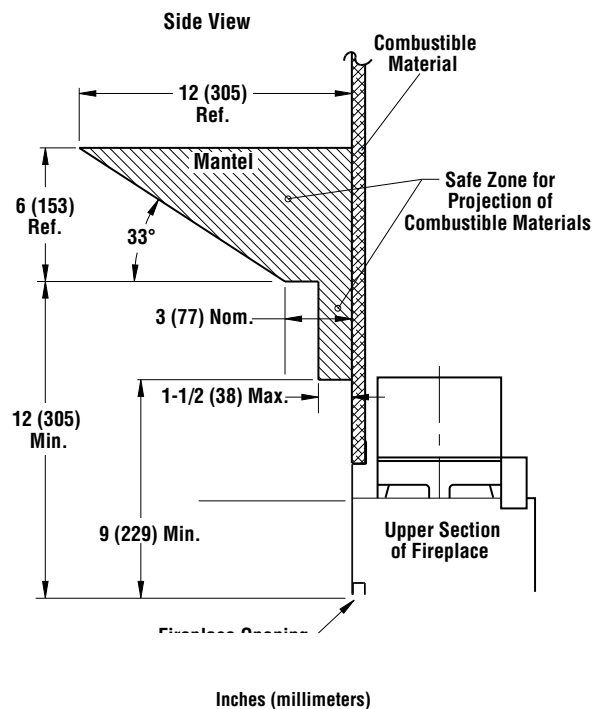

Venting

Venting
Uses Standard (8DM) and Hi-Temp (8HT) Wood Burning Chimney. For Canada Use 8HT Chimney

