

PWLCL630S1

Wall-mount

YALE
APPLIANCE





For homeowners who are passionate about the culinary arts, the seamless welded corner craftsmanship, traditional styling and gleaming stainless steel of this hood, provides the look and performance expected from a professional-grade range hood.

With the new backlit hidden knob controls and traditional baffle filters, it is available in 30" and equipped with a 600 CFM to support all cooking needs. Designed for standard ducted ventilation only.

MOUNTING HEIGHT RANGE


 $\geq 24'' \geq 30''$

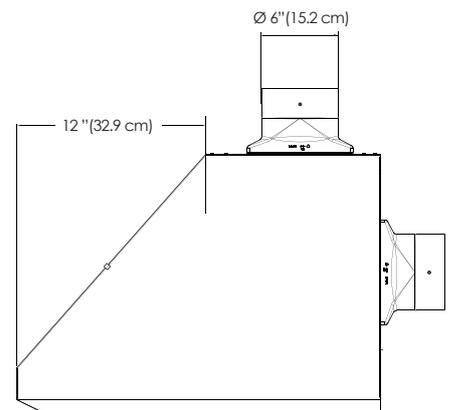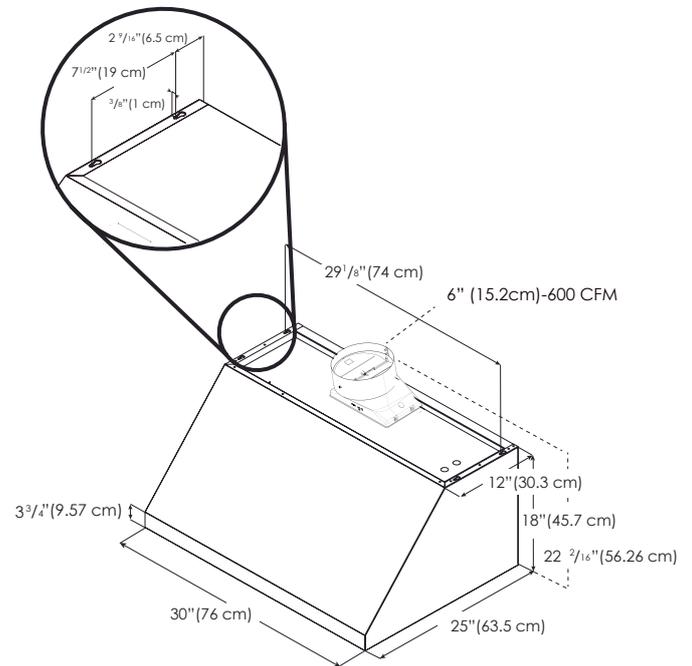

PWLCL630S1

Wall-mount

YALE
APPLIANCE

SPECIFICATIONS

Width:	30" Unit
Model:	PWLCL630S1
Dimensions:	30"W x 25"D x 18"H
Blower Type(internal):**	600 CFM(4-speed)
Noise (sones):**	1.7 - 7.0 Sones
Finish:	Stainless Steel
Controls:	Fully Retractable Rotating Knobs with White Backlighting
Illumination: (replaceable lamps 1 intensity)	2 LED, 6.5 Watts 3000 KELVIN 540 LUMEN/Lamp
Grease Filter:	(2) Grease Collecting Stainless Steel Baffle
Duct Transition:	6" Round with Backdraft Damper (top and rear)
Installation Type:	Ducted or Recirculating with Kit
Mounting Height Range:	Electric ≥ 24", Gas ≥ 30"
Electrical:	120V - 60 Hz, 463 Watts
ACCESSORIES:	
Duct Cover Kit 6" (No grates)	ACC02159
Duct Cover Kit 6" (With grates)	ACC0204547 (Requires ACC0192765 Recirculation Filters)
Long Chimney Ext. 12"	ACC02160
Inline Blower Shell Kit	ACC0205342 (For use with 600 models)
Heat Lamp w/2 175W bulbs:	ACC0155106
Stainless Steel Backsplash:	ACC0142864
Recirculating kits:	
Carbon filters:	ACC0192765 (Contains 4 round carbon filters)
Metal Deflector:	ACC195736 (6" round metal deflector for 600 CFM models)
WARRANTY:	Two (2) years parts & in-home labor

FEATURES



QUIET SYSTEM - Specialized technology that allows reducing sound levels of your hood, which can effectively decrease noise by more than 35%.



Grease Collecting Baffle Filters - Intended for high airflow cooking. Their "S" shape design and Stainless Steel finish is crafted to capture significant amounts of grease.



Thermal barrier - The system detects extreme temperatures above 158 degrees and automatically increases the blower speed to HIGH.



AIR FLOW CONTROL - AFC technology enables the user to reduce the maximum blower CFM achieving <300 CFMs, to meet local code requirements.



Fine precision - Constructed with great attention to detail with High-quality stainless steel, result in a seamless and flawless finish.



Superior performance - High performance ventilation with blowers ranging from 600 to 1200 CFM.

ADA
COMPLIANT

AHAM
VERIFIDE



* The product images shown are for illustration purposes only and may not be an exact representation of the product.

** CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

AIRFLOW CONTROL

Air Flow Control technology enables the user to reduce the maximum blower CFM of your hood achieving <300 CFMs, to meet local code requirements.

This model includes an Electronic Bypass Kit that needs to be placed at the moment of installing.