



# 24" W. UNDERCOUNTER LOW PROFILE REFRIGERATOR

FRUI-ADA

## PROFESSIONAL FEATURES

- 4.6 cu. ft. capacity stores up to 95 cans (12 oz.)
- Includes two cantilevered white-framed glass shelves (one half-width/one full-width) and one fixed position steel framed glass shelf
- Half-width shelf allows for tall item storage
- MaxStore bin stores loose items
- Dynamic cooling technology delivers rapid cool down, frost-free operation, and temperature stability
- Digital controls allow temperature selections from 34°F to 60°F
- Door ajar and high/low temperature alerts
- Arctic white LED theater-style lighting
- Arctic white interior
- Low profile, ADA compliant height
- Accepts 3/4" or 5/8" custom panels or accessory door panel kits



FRUI3242DRADA

## MODEL NUMBER

- FRUI3242DRADA – 24" W. Undercounter Low Profile Refrigerator, Solid Panel Ready, Right Hinge
- FRUI3242DLADA – 24" W. Undercounter Low Profile Refrigerator, Solid Panel Ready, Left Hinge



FRUI3242DLADA

## ACCESSORIES

- PDPUS324SS – Professional Door Panel for 24" W. Low Profile Refrigerator, Stainless Steel
- CDPUS324SS – Classic Door Panel for 24" W. Low Profile Refrigerator, Stainless Steel

## DESIGN OPTIONS

- Reversible soft-close door allows for right or left swing
- Choice of two accessory door panel kits for each unit
  - Professional Door Panel features the iconic Viking handle for true design integrity
  - Classic Door Panel features a slim handle that coordinates with any kitchen design

## WARRANTY

- 2-year full covers complete unit
- 90-day full – cosmetic parts such as glass, painted items, and decorative items
- 6-year full – sealed refrigeration system



# 24" W. UNDERCOUNTER LOW PROFILE REFRIGERATOR



Viking 3 Series – FRUI

## 24" W. UNDERCOUNTER LOW PROFILE REFRIGERATOR

<b>DESCRIPTION</b>	FRUI3242RADA / FRUI3242DLADA
<b>Overall Width</b>	23-7/8" (60.7 cm)
<b>Overall Height</b>	31" min to 32" max (78.7 cm to 81.3 cm)
<b>Overall Depth from Rear</b>	To front of door: 23-5/8" (60.2 cm) To handle: 25-1/2" (64.8 cm) With door at 90° angle: 47-3/4" (121.3 cm)
<b>Electrical Requirements</b>	115V/60Hz/15A
<b>Maximum Amp Usage</b>	3.0 amps
<b>Maximum Storage Capacity</b>	4.6 cu. ft.
<b>Cord Length</b>	6 ft.
<b>Interior Finish</b>	White
<b>ENERGY STAR</b>	No
<b>Capacity: Cans (12-oz.)</b>	95
<b>Capacity Volume</b>	4.6 cu. ft.
<b>Defrost Type</b>	Frost-Free
<b>Refrigerant Type</b>	R600a
<b>Sabbath Mode</b>	Yes
<b>Temperature Range</b>	34°F to 60°F
<b>Shipping Dimensions</b>	28" W. x 31" D. x 37" H.
<b>Approximate Shipping Weight</b>	160 lbs.

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

Rough-In Opening Dimensions			Cabinet Dimensions					
A	B	C	D	E	F	G	H	J
24" (61 cm)	31-1/4" to 32-1/4" (79.4 cm to 81.9 cm)	24" (61 cm)	23-7/8" (60.7 cm)	31" to 32" (78.7 cm to 81.3 cm)	23-5/8" (60.0 cm)	25-1/2" (64.8 cm)	47-3/4" (121.3 cm)	22-3/4" (65.4 cm)

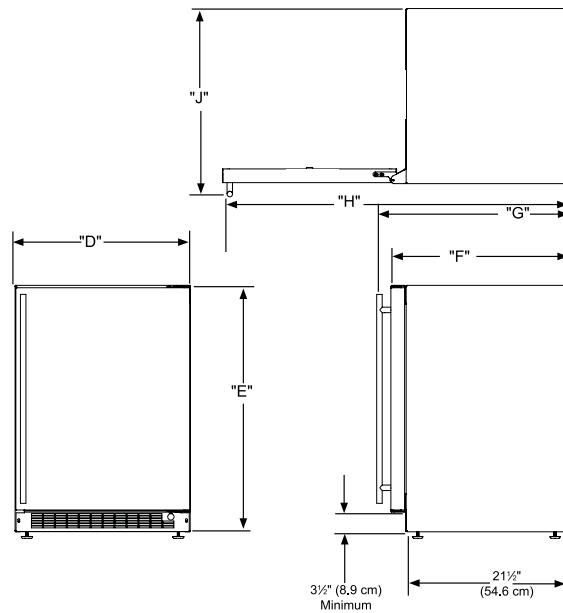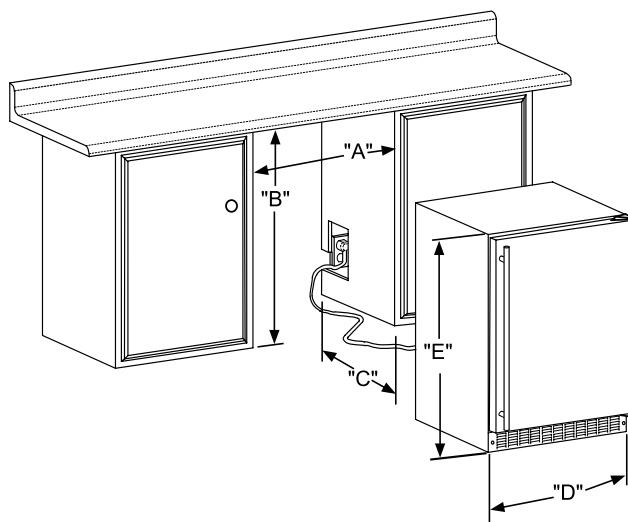

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit [vikingrange.com](http://vikingrange.com)  
© 2025 Viking Range, LLC All rights reserved. Specifications subject to change without notice.