



DD24

Direct Draw Refrigerator with Swing Door



DD-24
08/04/23
Item # 13534

• DD24

• DD24-S*



DD24-S



DD24

Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

- Heavy duty 18-gauge stainless steel top
- Stainless steel interior
- Polished stainless steel insulated tower with plated brass faucet

- Black vinyl coated exterior front, sides, and rear
- Stainless steel threshold protects door frame from damage when loading and unloading kegs
- Keg cushion to protect floor and allow air to circulate below kegs
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controller with digital LED display (°F or °C)
- Cabinets are designed to maintain interior temperatures between 32°F to 38°F
- Brushed aluminum glass rail for mug storage on top
- Cabinet walls and doors are insulated with environmentally friendly, CFC free foamed in place polyurethane
- Rear knockouts for gas line or for plumbing drain to outside of unit
- Environmentally friendly R290 refrigerant

Model	Cabinet Dimensions W x D x H	Capacity (AHAM) cu ft	Door(s)	Tower(s)	Tap(s)	1/2 Barrel(s)	HP	Amps	Voltage	NEMA Plug	Shipping Dimensions W x D x H	Shipping Weight
DD24(-S*)	24.88" x 30" x 39.38"	7.46 ft ³	1	1	1	1	1/6	1.5	115	5-15P	34.5" x 29" x 45.5"	175 lbs.

Options & Accessories

* (-S) Stainless Steel Exterior option available - Made to order.

Warranty

3 Year parts and labor / 5 year compressor

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

Hoshizaki reserves the right to change specifications without notice.







DD24

Direct Draw Refrigerator with Swing Door


DD-24
08/04/23
Item # 13534

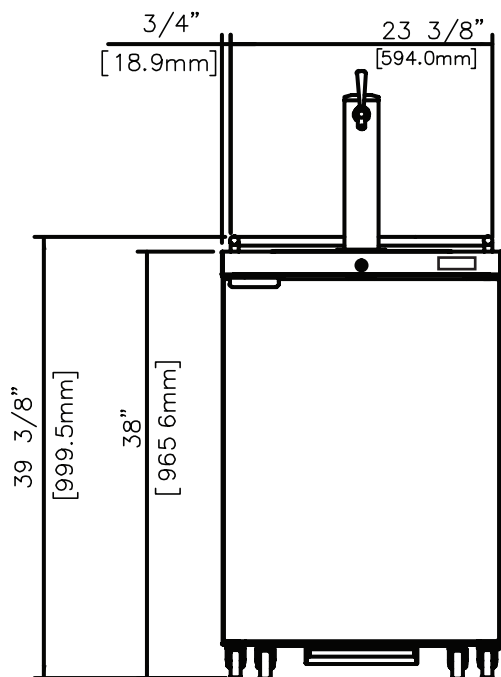

DD24(-S) Front View

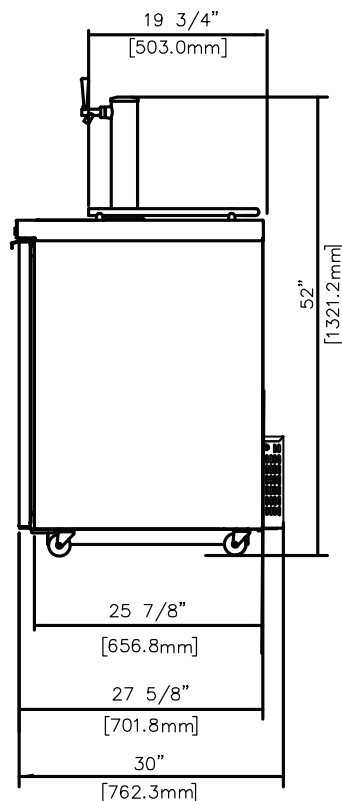

DD24(-S) Side View

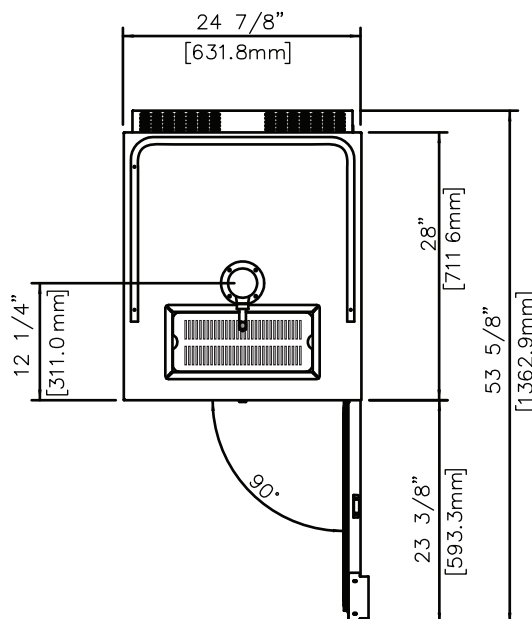

DD24(-S) Plan View