


### GENERAL DESCRIPTION:

Commercial shower system trim kit includes metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), a 59" (1500 mm) metal shower hose, vacuum breaker, a 3-function hand shower with non-positive shut-off, 2-way diverter, fixed showerhead and a 36" slide-grab bar.

One-piece double ceramic pressure balance cartridge maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Integral check valves prevent cross flow. Adjustable hot limit safety stop. Back-to-back capable. Durable valve trim with metal handle and escutcheon. 36" long combination slide bar / grab bar. 1-1/2" diameter stainless steel bar that meets ANSI standard 250 lb pull test. Chrome-plated hand shower holder with ADA compliant lever handle. 2.5 gpm/9.5 L/min.

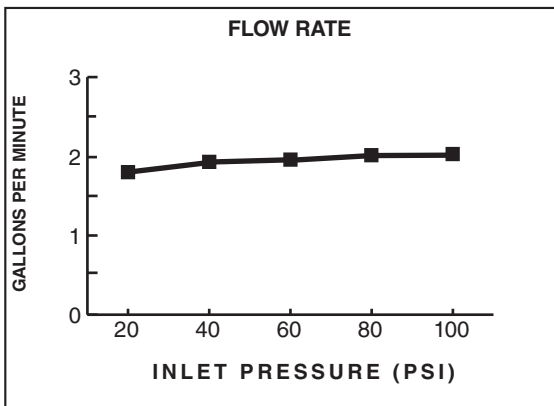

### MODEL NUMBER:

#### ❑ TU662SG.223 Commercial Shower System Kit

Includes:

• Reliant3 Valve Trim	TU385501WDXH **
- Includes Pressure Balance Cartridge	
• 3-Function Hand Shower with non-positive shut-off	1660.767
• In-Line Vacuum Breaker	1660.400
• 59" Metal Hose	8888.035
• Wall Supply	8888.037
• Easy Clean showerhead	M953550-002
• 2-way diverter valve	R422
• Diverter Handle	T342.430
• 36" Slide-Grab Bar	1662.236

**\*\* Flash rough-in valve must be purchased separately**

### PRESSURE BALANCE CARTRIDGE:

**One-Piece Cartridge:** Simplifies installation and maintenance.

#### **Double Ceramic Pressure Balance Cartridge:**

Combination of ceramic disc mixing valve and a ceramic balancing spool

**Ceramic Disc Mixing Valve:** Assures a lifetime of drip-free performance and smooth handle operation.

**Ceramic Balancing Spool:** Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions.

**Integrated Check Valves:** Engineered to eliminate cross flow.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Comfort Zone:** Wider range to the desired temperature.

**Back-to-Back Capability:** Hot and cold can be reversed quickly and easily.

**Trim Kit:** Metal escutcheon with metal lever. Red / blue indicator ring.

### PERSONAL SHOWER:

**ADA-Compliant:** Non-positive shut-off button on handle reduces flow to a trickle.

### SLIDE-GRAB BAR:

**Stronger Than Standard Slide Bars:** 1-1/2" diameter S.S. bar meets ANSI standard 250 lb. pull test. Chrome-plated hand shower holder with ADA compliant lever handle.

### SUGGESTED SPECIFICATION

Commercial shower system trim kit shall feature metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), 59" metal hose, vacuum breaker, 2.5 gpm/9.5 L/min. 3-function hand shower with non-positive shut-off, 2-way diverter, fixed showerhead and a 36" slide-grab bar. Shall also feature one-piece double ceramic pressure balance cartridge. Fitting shall be American Standard Model # TU662SG.223.002.

### CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASSE 1016

ASME A112.18.1016

CSA B125.16

ASME A112.18.1

CSA B125.1

Product Number	Description	Finish
		Polished Chrome
		002
TU662SG.223	Commercial Shower System Trim Kit. Contains double ceramic pressure balance cartridge, valve trim kit, 3-function hand shower with non-positive shut-off, metal hose, vacuum breaker, wall supply, 2-way diverter, fixed showerhead and 36" slide-grab bar. 2.5 gpm/9.5 L/min. <b>** Flash rough-in valve must be purchased separately</b>	

