PSCS3RGX

GE Profile 23.3 Cu. Ft. Side-by-Side Refrigerator with Dispenser

Dimensions and Installation Information (in inches)

Overall Dimensions	Height to top of hinge (in.) A	69-5/8
	Height to top of case (in.) B	68-3/4
	Case depth without door (in.) C [†]	23-7/8
	Case depth less door handle (in.) D [†]	27-1/8
	Case depth with door handle (in.) E [†]	29-5/8
	Depth with fresh food door open 90° (in.) F [†]	46
	Width (in.) G	35-3/4
	Width with door open 90° inc. door handle (in.) H	41-3/8
Air Clearances	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	1


†Water hook-up fits in back air clearance when calculating installation depth.

If installed against a wall, allow clearance of 14-3/16" on freezer side to remove bin.


Clearance required to remove fresh food full-size pan without disassembling is 18-15/16".

Allow additional space for any necessary leveling adjustments.

For answers to your Monogram,®GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.














PSCS3RGX

GE Profile 23.3 Cu. Ft. Side-by-Side Refrigerator with Dispenser

Rough-In Dimensions and Installation Information (in inches) Installation Tips to Maximize the Built-In Look

- All wall/floor molding should be removed prior to installation.
- Water recess on rear wall recommended to prevent water line damage. 48" minimum length, 1/4" diameter water line tubing recommended.
- When possible, recess both copper water line and electrical outlet. (See local codes)
- Front and rear leveling legs are adjustable for the built-in look. (See owner's manual)
- *The rough-in dimensions of 70" for 23 cu. ft. models and 72-1/2" for 25 cu. ft. models are minimum and measured from the finished floor to top of opening (or the underside of the overhead cabinets). For Models with Trim Kit: If frameless style cabinets are planned for above the refrigerator, you may need to consider adding a maximum of 1/4" (70-1/4") to height of opening for 23 cu. ft. models and 1/8" (72-5/8") for 25 cu. ft. models to allow for additional clearance between the cabinet doors and the top of refrigerator trim when the cabinet doors are in open position.

†Model PSDW3YGX is 71-3/4"

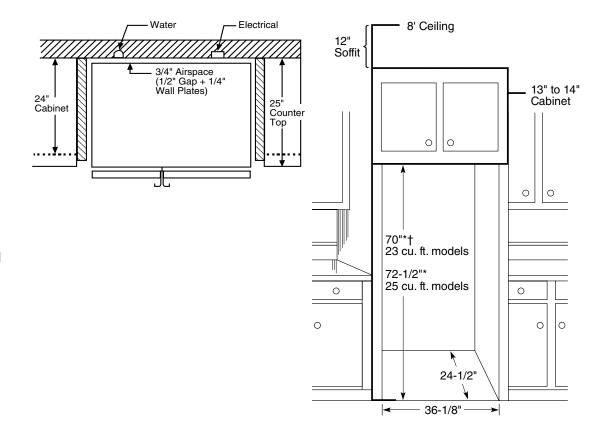

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.







PSCS3RGX

GE Profile 23.3 Cu. Ft. Side-by-Side Refrigerator with Dispenser

Features and Benefits

- Counter-depth configuration Counter-depth configuration makes it possible to have the look of a built-in without the added expense
- Stainless steel exterior Stainless steel adds elegance to any kitchen décor
- ClimateKeeper[™] system Electronic controls, multiple electronic sensors and a multi-flow air system help provide even cooling
- Integrated dispenser with LED lighting and UltraFlow100 This bright dispenser pours up to 100 ounces of water per minute
- Integrated Ice™ system Designed to give you more room to store your favorite frozen foods
- Quick Ice[™] setting Speed up your icemaker to keep up with your life
- TurboCool™ setting Restores proper temperature to the refrigerator after frequent door openings
- Integrated shelf support system Strong shelf supports add a contemporary look
- Adjustable ClearLook™ door bins Store gallon containers with ease in the door and free up valuable shelf space
- In-the-door beverage rack Beverages are easy to grab when you're on the go
- Adjustable, slide-out spillproof glass shelves Adjustable shelves are designed to make clean up quick and easy
- Tilt-out freezer door bins Even when bins are filled to capacity, items are easy to remove
- FrostGuard™ technology Controlled defrosting keeps frozen foods from feeling the burn
- Premium quiet design Enjoy the sound of GE's most advanced sound control system
- Model PSCS3RGXSS Stainless steel





