



24 in. Microwave Drawer™ Oven

SMD2440JS

- Automatic drawer system, opens with a press of a button and gently closes with a soft nudge
- Angled Control Panel for Easy Viewing and Operation
- Sensor Cook Menu for Precise Cooking and Reheating
- Fits a 20 oz. Cup or 4 qt. Casserole Dish
- Install Below an Island, Peninsula, or Standard Cabinetry
- Flush-Mount Ready

FEATURES

Finish	Stainless Steel
Drawer Opening	Automatic Door, Open/Close Button
Width	24"
Capacity (cu. ft.)	1.2
Output Power (watts)	950
Interior Light	Incandescent
Open/Close	Yes
Start/+30Sec	Yes
Stop/Clear	Yes
Power Level	11
Timer/Clock	Yes
Control Lock	Yes
Help/Settings	Yes
Demo Mode	Yes
End of Cooking Reminder	Yes

CONTROL PANEL

Control Panel Location	Center/Top
Control Panel Type	Membrane
Display Type	LCD 7-Segment
Display Color	White on Black Background

COOKING / MENU PRESETS

Popcorn	Yes, Sensor
Reheat	Yes, Sensor
Sensor Cook	Quick Fresh Vegetables, Longer Fresh Vegetables, Frozen Vegetables, Sweet Potatoes, Ground Meat, Fish/Seafood, White Rice, Brown Rice
Frozen Entrée	Yes, Sensor
Baked Potatoes	Yes, Sensor
Steamer Bags	Yes, Sensor
Defrost	Ground Meat, Steaks/Chops, Boneless Poultry, Bone-in Poultry, Roast, Casserole or Soup
Rolls/Muffins	Fresh, Frozen
Melt, Soften & Warm Options	Butter, Chocolate, Ice Cream, Cream Cheese, Syrup, Dessert Toppings
Other Menus	Beverage Reheat, Hot Water, Hot Cereal
Keep Warm	Yes

ADDITIONAL FEATURES

Flush Mount Ready	Yes
-------------------	-----

OPTIONAL ACCESSORY

Product Name	Drawer Under-the-Counter Pedestal
Model	SKMD24U0ES
Color	Stainless Steel or Custom Panel Ready
UPC	074000620865

ADDITIONAL SPECIFICATIONS

Power Source	120V, 60HZ / 15A / 1.67 KW
--------------	----------------------------

DIMENSIONS & WEIGHT (IN./LBS.) (W X H X D)

Interior Cavity Dimensions	17-5/16" x 7-1/8" x 16-9/16"
Product Dimensions	23-5/8" x 15-1/16" x 23-7/16"
Shipping Dimensions	27-3/4" x 21-3/4" x 29-1/4"
Product Weight/Shipping Weight	72.0 lbs. / 83.6 lbs.
Standard Mount Cutout Dimensions	22-1/8" x 14-13/16" x 23-1/2"
Flush Mount Cutout Dimensions	23-7/8" x 15-5/16" x 23-1/2"

WARRANTY / UPC

Parts	1 Year (In-Home Limited)
Labor	1 Year (In-Home Limited)
Magnetron Tube	4 Years Additional (Parts Only)
UPC	074000622050


© 2025 Sharp Electronics Corporation. All rights reserved. Sharp and all related trademarks are trademarks or registered trademarks of Sharp Corporation and/or its affiliated companies. All other trademarks are property of their respective owners. Product specifications and design are subject to change without notice. Internal capacity calculated by measuring maximum width, depth and height. Actual capacity for holding food is less. ²Must be installed according to ADA guidelines. Please check current ADA requirements.



The following are measurements only.
Do not use to install microwave drawer™ oven.


For detailed installation instructions, please refer to the installation manual.

PRODUCT DIMENSIONS

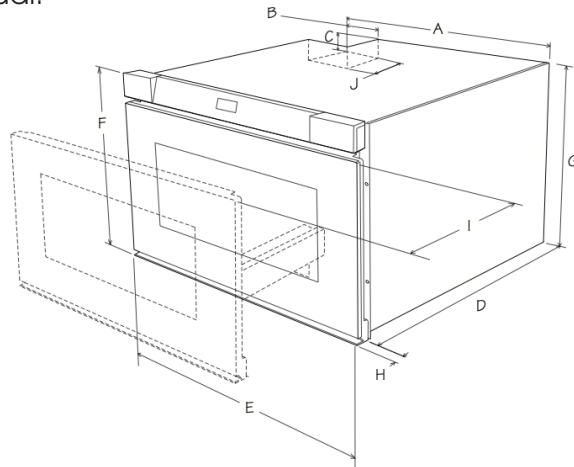


- A. 21-5/8" (549.28 mm)
- B. 4-11/16" (119.06 mm)
- C. 1-3/4" (44.45 mm)
- D. 21-7/8" (555.63 mm)
- E. 23-5/8" (600.07 mm)
- F. 15-1/16" (382.59 mm)
- G. 14-5/8" (371.48 mm)
- H. 1-9/16" (39.69 mm) door thickness
- I. 15" (381 mm) auto drawer opening
- J. 4" (101 mm)

STANDARD MOUNT MEASUREMENTS

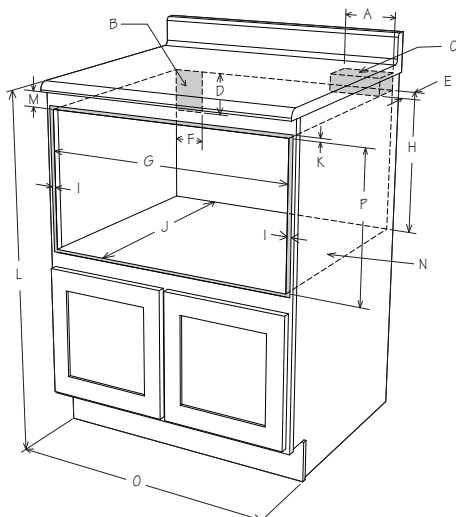

- A. 6" (152.40 mm)
- B. Suggested electrical outlet location
- C. Anti-Tip block
- D. 5" (127 mm)
- E. 3-1/2" (88.90 mm)
- F. 4" (101.60 mm)
- G. 22-1/8" (561.97 mm) opening
- H. 14-13/16" (376.24 mm) to bottom of Anti-Tip block
- I. Allow 7/8" (22.22 mm) overlap
- J. 23-1/2" (596.90 mm) min. depth
- K. Allow 1/4" overlap
- L. 36" (914.40 mm) countertop height
- M. Allow 1/4" min. space
- N. Floor must support 100 lb/45.4 kg
- O. 24" (609.60 mm) cabinet min.
- P. 14-13/16" (395.29 mm) opening

FLUSH MOUNT MEASUREMENTS

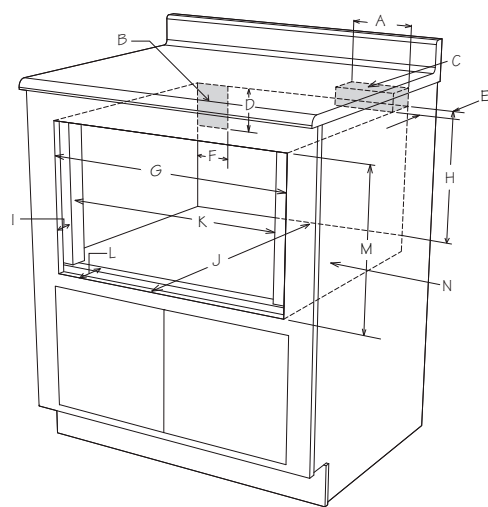

- A. 6" (152.40 mm)
- B. Suggested electrical outlet location
- C. Anti-Tip block
- D. 5" (127 mm)
- E. 3-1/2" (88.90 mm)
- F. 4" (101.60 mm)
- G. 23-7/8" (606.43 mm)
- H. 14-13/16" (376.24 mm) to bottom of Anti-Tip block
- I. 1-9/16" (25.4mm)
- J. 23-1/2" (596.90 mm) min. depth
- K. 22-1/8" (561.97 mm)
- L. 1-9/16" (25.4mm) to front of shelf
- M. 15-5/16" (388.934 mm) opening
- N. Floor must support 100 lb (45.4 kg)