



## Storage Cabinet CF3121

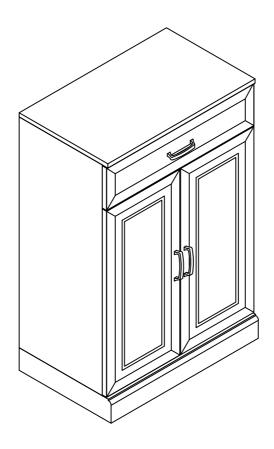

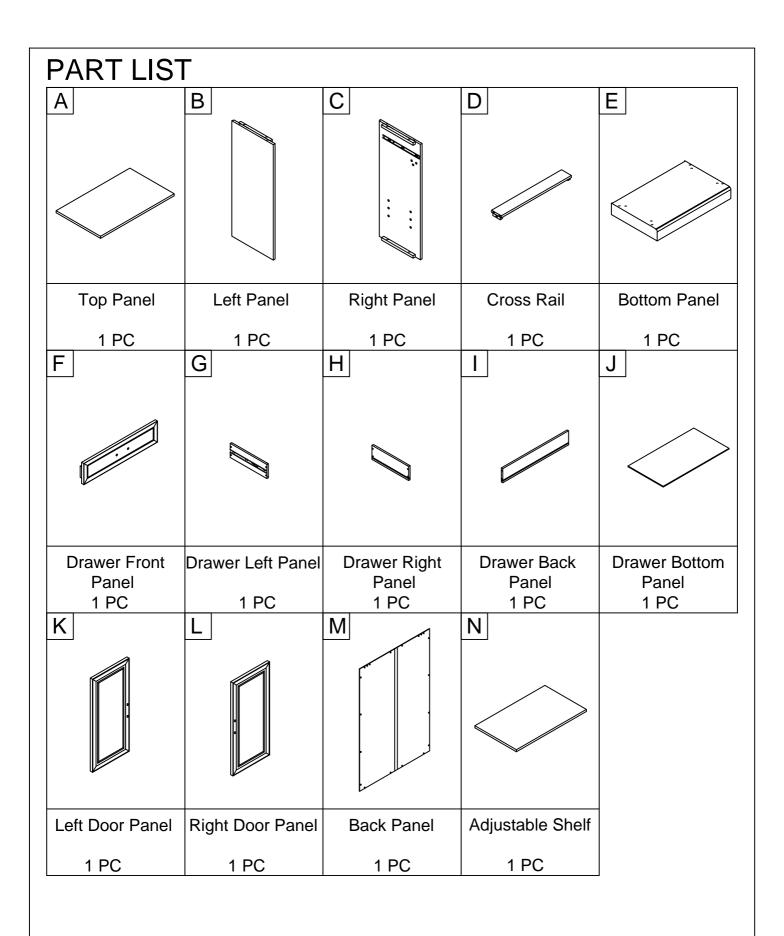

HARDWARE LIST								
#1	#2	#3	#4	#5				
	O	0						
Ø1/4"*25mm	Ø1/4"*11mm	Ø1/4"*13mm	4mm*90	Ø8*30mm				
Bolt	Spring Washer	Flat Washer	Allen Wrench	Wood Dowel				
10 PCS (Extra 1)	10 PCS (Extra 1)	10 PCS (Extra 1)	1 PC	12 PCS (Extra 1)				
#6	#7	#8	#9	#10				
			(A) appropriate to					
	6*3*15mm		7*3.5*15mm					
Magnet	Round Head Screw	Door Hinge	Screw	Handle				
1 PC	2 PCS (Extra 1)	4 PCS	24 PCS (Extra 1)	3 PCS				
#11	#12	#13	#14	#15				
5/32"*19mm	5/32"*15mm		8*3*15mm					
Long Round Head Bolt	Short Round Head Bolt	Shelf Holder	Short Screw	Safety Strap Kit				
4 PCS (Extra 1)	2 PCS (Extra 1)	4 PCS (Extra 1)	16 PCS (Extra 1)	1 SET				
#16								
&TELEFETE CO								
8*4*25								
Long Screw								

## ADDITIONAL TOOLS (Not Provided)


8 PCS (Extra 1)

Note: It is not recommended to use power tools during assembly.




Note: Wood dowels are intended for alignment. Additional clearance between wood dowel and pre-drilled hole is intentional for ease of assembly.


Step 1. Attach magnet (part #6) to cross rail (part D) using round head screws (part #7) and phillips head screwdriver. Attach handle (part #10) to drawer front panel (part F) using short round head bolts (part #12) and phillips head screwdriver.

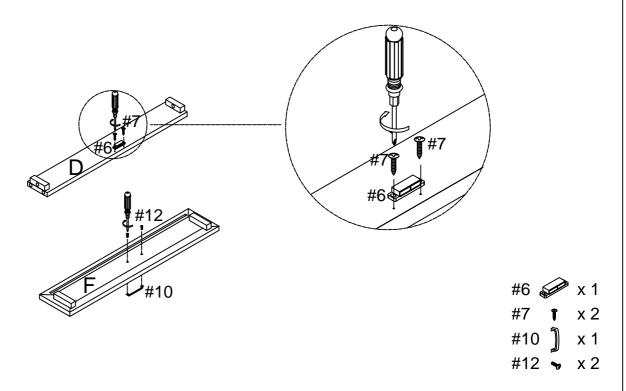


Step 2. Attach door hinges (part #8) to left door panel (part K) and right door panel (part L) using screws (part #9) and phillips head screwdriver. Attach handles (part #10) to left door panel (part K) and right door panel (part L) using long round head bolts (part #11) and phillips head screwdriver.

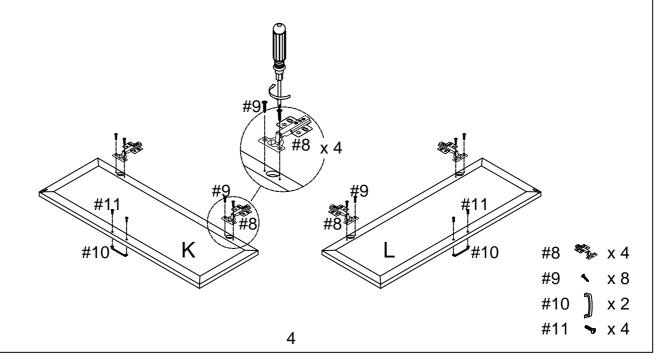


Step 3. Attach drawer panels (parts G & H) to drawer front panel (part F) using long screws (part #16) and phillips head screwdriver. Slide drawer bottom panel (part J) into the grooves of assembled unit (parts F, G & H). Attach drawer back panel (part I) to assembled unit (parts G, H & J) using long screws (part #16) and phillips

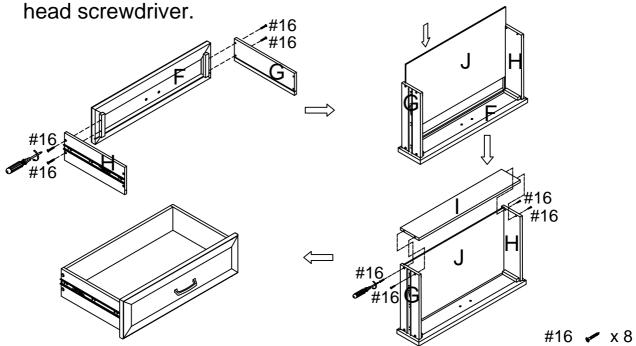


Step 4. Attach cross rail (part D) to left panel (part B) and right panel (part C) using wood dowels (part #5), bolts (part #1), spring washers (part #2), flat washers (part #3) and allen wrench (part #4).

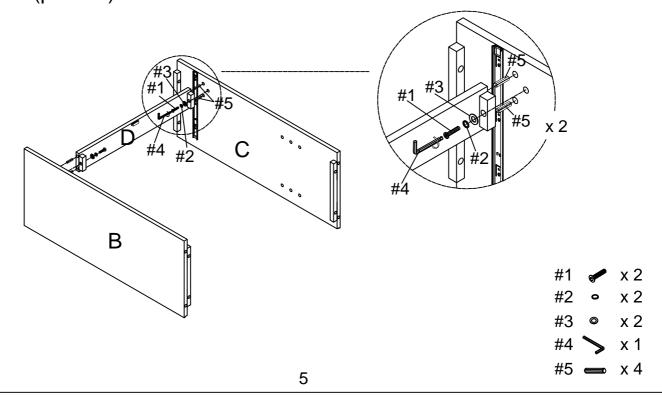


Step 5. Attach top panel (part A) to assembled unit (parts B & C) using wood dowels (part #5), bolts (part #1), spring washers (part #2), flat washers (part #3) and allen wrench (part #4).

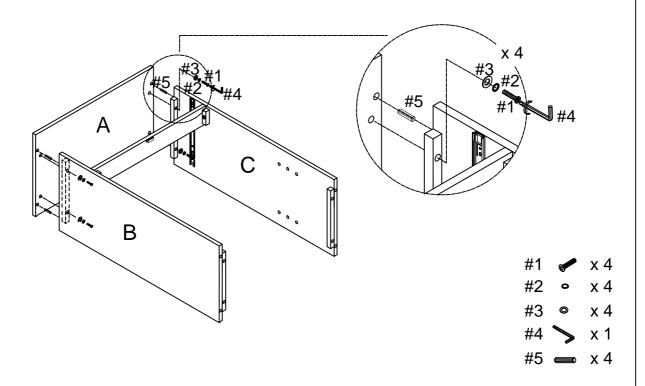

Step 6. Attach bottom panel (part E) to assembled unit (parts B & C) using wood dowels (part #5), bolts (part #1), spring washers (part #2), flat washers (part #3) and allen wrench (part #4).

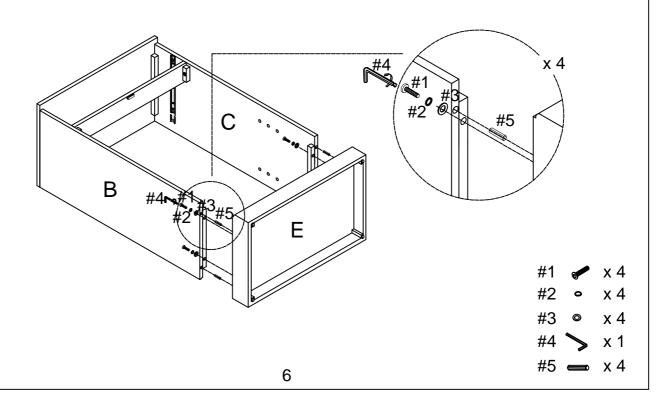


Step 7. Carefully turn unit upright. Attach back panel (part M) to assembled unit (parts A, B, C & E) using short screws (part #14) and phillips head screwdriver.

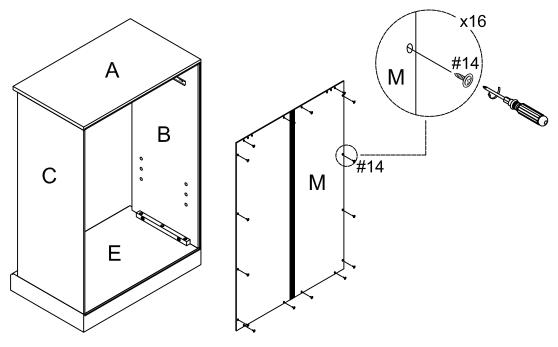

#14 🐄 x 16

Step 8. Place shelf holders (part #13) into desired position and slide adjustable shelf (part N) and assembled drawer into place.


Note: To release trigger disconnect levers push one side up and the other down.

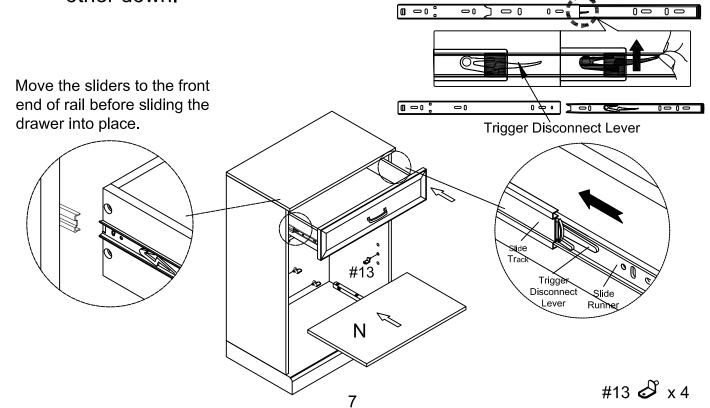


Step 9. Attach door panels (parts K & L) to panels (parts B & C) using screws (part #9) and phillips head screwdriver.

NOTE: It is important to adjust levelers once fully assembled and uprigft. Extend adjustable leveler until it's firmly in contact with the floor. If relocating, adjust leveler as needed until it's firmly in contact with the floor in new location.

Important: Safety strap kit (part #15) must be installed to prevent tipping, damage and/or injury.

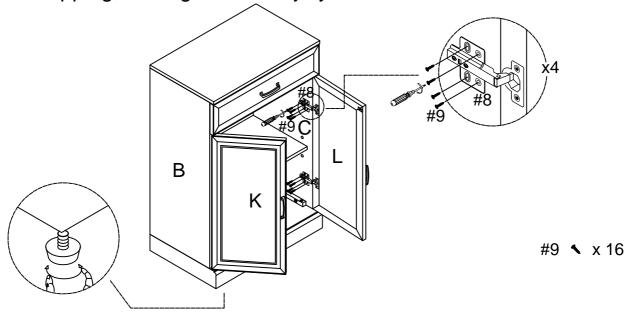




#15	А	В	С	D	Е
		0	•	William Co.	
			8*3*15mm	8*4*35mm	
Safety Strap Kit	Wall Anchor	Bracket	Short Screw	Long Screw	Safety Wall Strap
1 SET	1 PC	2 PCS	1 PC	1 PC	1 PC

## SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.

- 1. Insert short screw (C) and safety wall strap (E) through bracket (B) and attach to top panel (part A) using phillips head screwdriver.
- 2. Drill a 11/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in top panel (part A) where bracket (B) is attached. Tap wall anchor (A) into the hole.
- 3. Insert long screw (D) and safety wall strap (E) through bracket (B) into wall anchor (A) using phillips head screwdriver.


Note: This item is not intended for clothing storage use.

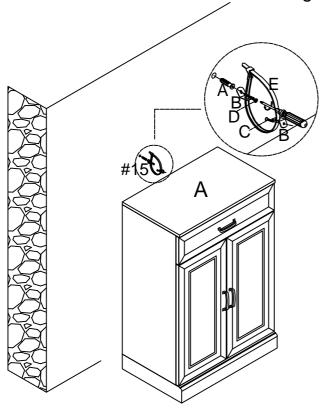




## ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL).

STEP 1 Open the door.




STEP 2 Adjust the gap between door panel and side panel




Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2b), then tighten the screw.

STEP 2a MOVE DOOR IN




Push the hinge back a little.

STEP 2b MOVE DOOR OUT




Pull the hinge forward a little.

STEP 3 To adjust the gap between two door




Loosen or tighten the screw indicated a little to adjust the gap between doors panels (see step 3a & step 3b)

STEP 3a MOVE DOOR RIGHT



Turn the screw clockwise a little as shown to make the gap small.

STEP 3b MOVE DOOR LEFT



Turn the screw counterclockwise a little as shown to make the gap big.