




1. Connect RCA lead(s) from subwoofer to the receiver





3. Connect to mains and turn on



4. LED indicator flashes blue until paired



5. LED turns solid blue on both devices when paired



6. If connection failed, LED will flash blue until it goes into standby.



7. If no audio signal after 20 minutes the transmitter or receiver will go into standby.




Monitor Audio Ltd 24 Brook Road, Rayleigh, Essex, SS6 7XJ England T. + 44 (0)1268 740580

F. + 44 (0)1268 740589 E. info@monitoraudio.co.uk



## WR-1 WIRELESS RECEIVER

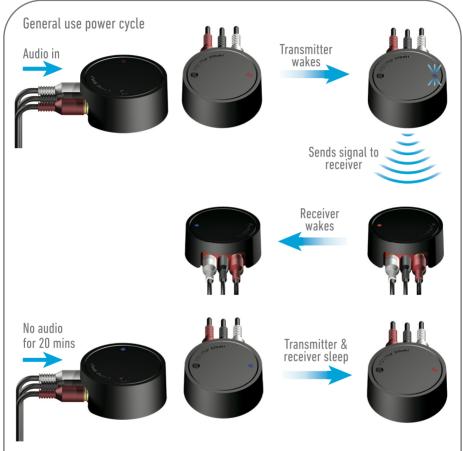

**Note:** In the event of a power outage and there are multiple devices installed within range of each other, please pair each partnering device seperately to ensure the corresponding transmitters and receivers are connected to each other.

Monitor Audio Ltd 24 Brook Road, Rayleigh, Essex, SS6 7XJ England T. + 44 (0)1268 740580 F. + 44 (0)1268 740589 E. info@monitoraudio.co.uk