


TOWNSEND SIDE TABLE


ASSEMBLY INSTRUCTIONS

TOWNSEND SIDE TABLE ASSEMBLED



PARTS AND FITTING PACKAGING DETAIL

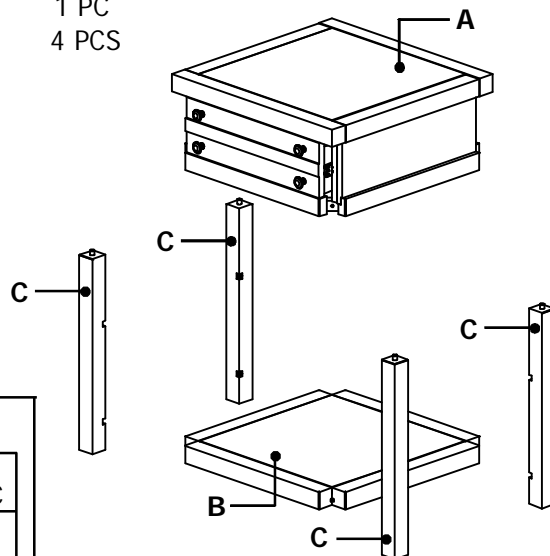



- A. SIDE TABLE BODY 1 PC
B. SIDE TABLE SHELF 1 PC
C. LEG 4 PCS
HARDWARE BOX



⚠ WARNING


FOR YOUR SAFETY AND CONVENIENCE
ASSEMBLY BY TWO PEOPLE IS RECOMMENDED

HARDWARE PACKED IN BOX

1	HEX BOLT (60MM)	8 PCS	2	LOCK WASHER	8 PCS	3	FLAT WASHER	8 PCS	4	WRENCH	1 PC
											


STEP 1 :

ATTACH LEGS (C) TO SIDE TABLE SHELF (B) USING
HEX BOLTS (1), LOCK WASHERS (2) AND FLAT WASHERS (3).
DO NOT TIGHTEN THE BOLTS COMPLETELY.

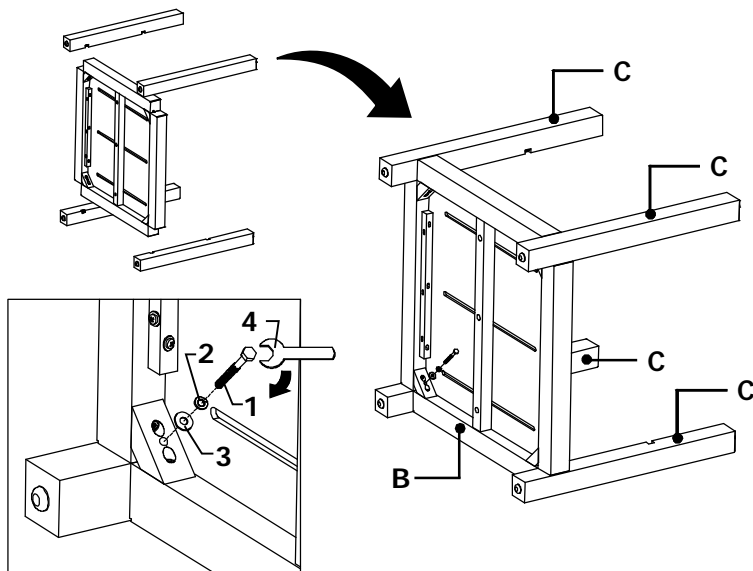


STEP 2 :

ON A CLEAN, FLAT, LEVEL SURFACE,
LAY THE SIDE TABLE BODY (A) UPSIDE DOWN.
ATTACH THE SHELF ASSEMBLY FOLLOWING
THE ILLUSTRATION.

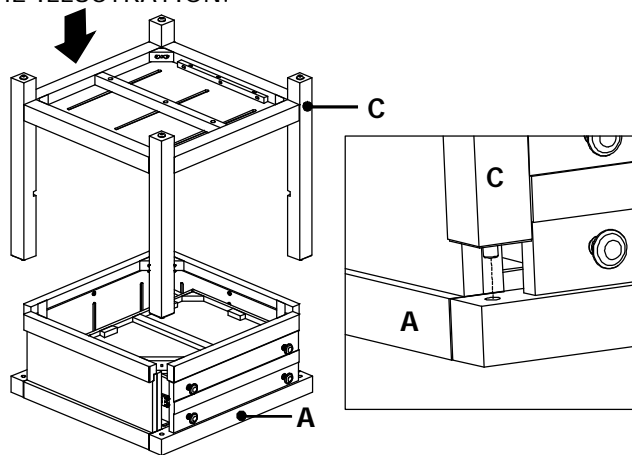

STEP 3 :

FOLLOWING THE ILLUSTRATION, ATTACH
CONNECTED SHELF ASSEMBLY TO THE SIDE TABLE
BODY USING HEX BOLTS, LOCK WASHERS AND
FLAT WASHERS. TIGHTEN ALL BOLTS, INCLUDING
ONES FROM STEP 1, COMPLETELY WITH WRENCH (4).

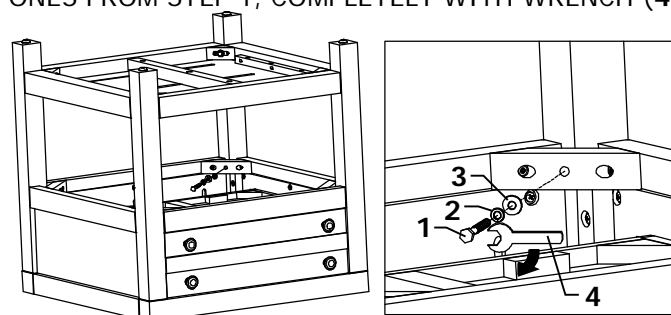

INSTRUCTIONS FOR ADJUSTING LEVELERS :

- POSITION THE TABLE IN
YOUR ROOM LOCATE LEVELERS
UNDER EACH LEG.
- TURN COUNTER-CLOCKWISE TO
EXTEND, CLOCKWISE TO CONTRACT.
- ADJUST LEVELERS UNTIL EACH
LEG IS APPLYING EQUAL UPWARD
PRESSURE ON THE TABLE.

