

- KEY FEATURES
- AI Gourmet Camera

6.8" Color LCD Touch Control Display/Panel

Dynamic ProBake® Convection

Gliding Rack

Flex Control Knobs

Soft Close

WideView Window


ThinQ



6.8 LCD Touch Display Control



AI Gourmet



ThinQ App

PRODUCT FEATURES

SUMMARY		APPEARANCES		SMART FEATURES	
Type	Gas Single Oven Slide-In	Available Colors	Anti-Finger Stainless Steel	ThinQ® (Wi-Fi Enabled)	Yes
Oven Capacity (cu.ft.)	6.3	Knobs	Aluminum	ThinQ Up	Yes
Color	PrintProof™ Stainless Steel	Knobs Material	Aluminum	Check & Control	Yes
CAPACITY		Knob Lighting (Backlit Dial Knob)	Yes	Voice Control	Google Assistant & Amazon Alexa
Oven Capacity (cu.ft.)	6.3	Handle	Aluminum	Smart Recipe (3rd Party Recipe App)	Sidechef
Warming Drawer Capacity (cu.ft.)	-	Handle Material	Aluminum	Proactive Customer Care	Yes
Storage Drawer Capacity (cu.ft.)	0.8 (no Handle)	Handle Type	Bar Type	SmartDiagnosis™	Yes
COOKTOP		PrintProof™ Finish	Yes	Camera	Yes
Burner/ BTU - Left Rear	9,100 BTU	Oven Door Feature	WideView™ Window	POWER/RATINGS	
Burner/ BTU - Left Rear	5,000 BTU	Cooktop Finish	EasyClean® Stainless Steel	Required Power Supply (amp)	120V / 60Hz / 4.2A
Burner/ BTU - Left Rear	18,000 BTU	DRAWER FEATURES		DIMENSIONS / CLEARANCES/ WEIGHT	
Burner/ BTU - Left Rear	23,000 BTU	Type	Storage	Shipping Weight	186.5 lbs.
Center (Oval Burner)	10,000 BTU Oval	Levels	-	Product Weight	212.7 lbs.
OVEN FEATURES		Time Control	No	Cabinet Width	30"
Broil Element (BTU)	17,000 BTU	CONTROL		Overall Depth without handle	26 7/8"
Bake Element (BTU)	19,000 BTU	Cooktop Control Type	Front Control Knobs	Overall Depth including handle	29 5/16" (743.9mm)
Convection Fan	(BLDC (DC 24V/500~2600rpm), forward and reverse rotation)	Flex Control Knob	Yes	Overall Height	37 1/8" (943.0mm)
Convection Type	Dynamic ProBake® Convection	Oven Control Type	Glass Touch (SmoothTouch™)	Overall Width	29 7/8" (759mm)
Oven Mode	Bake, Conv. Bake, Conv. Roast, Broil High, Broil Low, Warm, Proof, Frozen Meal, Air Fry, Air Sous-Vide, Air Roast, Pizza, Crispy Reheat, Dehydrate, Auto cook, EasyClean®, Self Clean	Display	6.8" Color TFT LCD	Oven Interior Dimensions (W x H x D)	24 7/8" x 21 3/8" x 20"
		Language	English/ Spanish/ French	Height to Cooking Surface	36"
		Clock	12hr or 24hr (Option)	Drawer Dimensions (W x H x D)	22 3/16" x 4 1/2" x 16 3/8"
Oven Control Features	Glass Touch (SmoothTouch™)	Kitchen Timer	Yes	Carton Dimensions (W x H x D)	32 1/2" x 44" x 30 1/2"
Convection Conversion	Yes	Timed Cook	Yes	LIMITED WARRANTY	
EasyClean®	Yes	Temperature Unit of Measure	Fahrenheit / Celsius	Parts and Labor	2 Year
EasyClean® Time	10 mins	Cooking Complete Reminder	Beeper (Hi, Lo, Off)	UPC CODE	
Self Clean	Yes	Volume		LSGU6339X	048231349680
No. of Rack Positions	7	Certified Sabbath mode	Yes		
Door Lock	Yes	ACCESSORIES			
Automatic Safety Shut-Down	Broil, Warm, Pizza : After 3 hours	Gliding Plate	1		
	Air sous-vide : After 48 hours	Gliding Rack	1		
	Esc : After 12 hours	Air Fry Tray	1		
InstaView	No	Heavy Duty Rack	1		
		Offset Rack	1		
		Wok Grate	1		
		Temperature Probe	1		
		Conversion Kit	1		
		Grid	1		
		Broiler Pan	1		
		Rear Filler	1		


LSGU6339X

30" Gas Range with Camera

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

PRODUCT DIMENSIONS

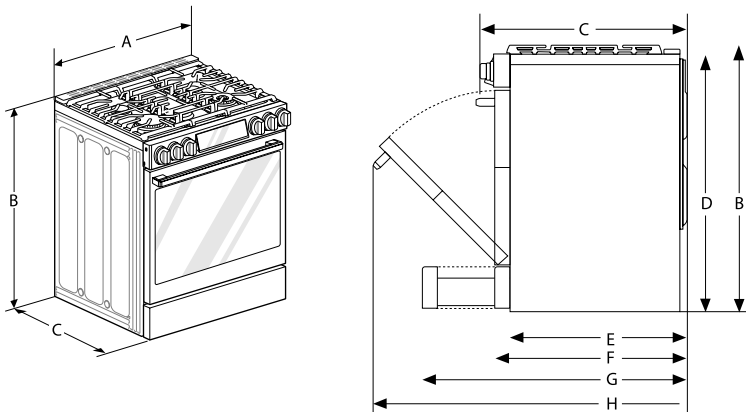

DIMENSION		
A	Width	29 7/8" (758.8 mm)
B	Height	37 1/4" (946 mm)
C	Depth with Door Handle	29 3/8" (745.2 mm)
D	Height (Excludes Vent Trim)	36" (913.0 mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 3/4" (629.4 mm)
F	Depth (Excludes Door Handle)	26 7/8" (683 mm)
G	Depth when drawer is fully opened	36 1/16" (916.2 mm)
H	Depth when door is fully opened	48 5/8" (1 235.9 mm)

Vetilation

Do not locate your range where it may be subject to strong drafts. Any openings in the floor or wall behind the range should be sealed. Make sure the openings around the base of the range that supply fresh air for combustion and ventilation are not blocked by carpeting or woodwork.


• This appliance must not be installed with a ventilation system that blows air downward toward the range. This type of ventilation system may cause ignition and combustion problems

Dimensions and Clearances


Provide enough clearance between the cooktop and adjacent combustible surfaces. These dimensions must be met for safe use of your cooktop.

The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements. The cooktop must be placed with at least 2 3/4" of clearance to the back wall.

CLEARANCE

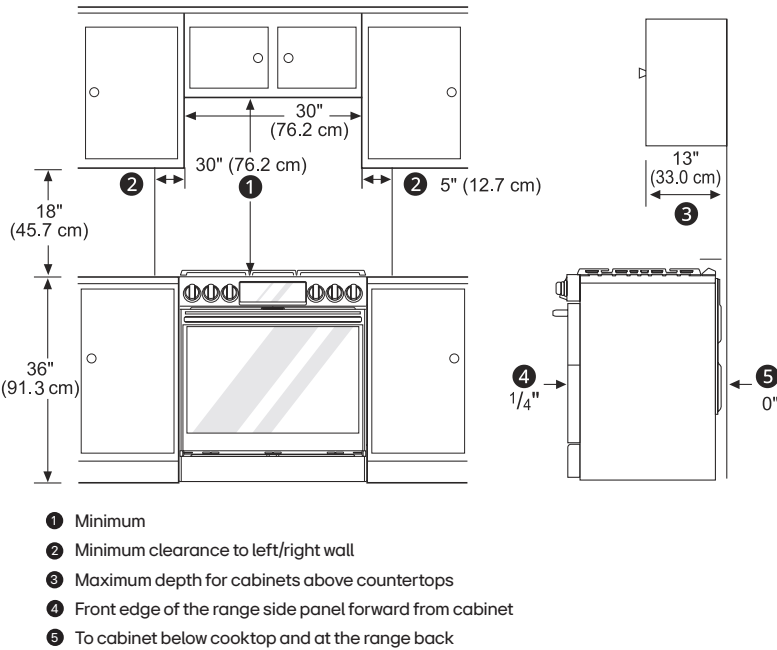

Gas Pipe and Electrical Outlet Locations

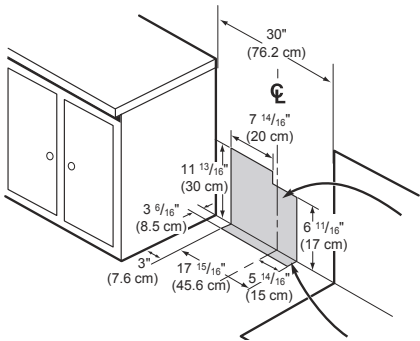

Leveling the Range

Level the range by adjusting the leveling legs with a wrench. Extending the legs slightly may also make it easier to insert the rear leg into the anti tip bracket.

