


GE Zoneline® Heat Pump Unit with Corrosion Protection, 230/208 Volt



Model# AZ65H07DAC

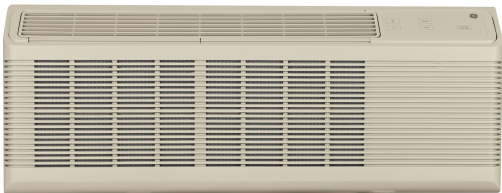

- Cooling capacity - 7,100/7,000 BTU
- Energy efficiency - 13.0/13.0 EER
- Dehumidification - 1.6 pints/hour
- Reverse heat cycle - 6,200/6,100 BTU
- Heat pump efficiency - 4.0/4.0 COP
- Indoor fan CFM (high/low) - 409/250
- Fresh air vent CFM (fully open high fan) - 38
- Quiet operation - Baked-on mastic sound barrier, cross flow blower and two DC fan motors create less noise to ensure comfort
- Corrosion resistant - Extends life of the unit in sea coast areas/corrosive environments
- Heat & Freeze Sentinels - Keeps the room from overheating or freezing
- Boost heat option - Provides supplemental resistance heat in heat pump mode
- Electronic temperature limiting - Prevents expensive over-cooling or over-heating of the room
- - Electronic touch controls with LED display
- - R-410A refrigerant
- - SMC base pan
- Simplified structure - Easy to maintain and service

Have more questions? Please contact 1-800-626-2005

FEATURES

Sensible Heat Ratio	73%
Chassis Type	Slide-In
Control Type	Standard Microcomputer; Tactile touch pad with LED Display
Corrosion Treated	Yes
Discharge Grille	2-position
Electronic Micro Computer Control	Yes
Fan Cycle Switch	Yes
Fan Motor	2
Fan Speed Control	Yes
Fan Speed Selections	Hi/Low Cooling; Hi/Low Fan Only; Hi/Low Heating
Filter Type	Rigid Frame; Slide-Out
Heat - Cool	Yes
Louver Style	Reversible
Manual Vent Control	Hidden
Rotary Compressor	Yes
Temperature Limiting	Electronic 7-Step
Vent Control	3-position
Venting Features	Concealed Manual Vent Control; Outdoor Vent Control - 3 Positions; Vent Air Filter
Zoneline Features	"Sleep" Mode; "Smart Fan" Fan Cycle Control; 3-Stage Heating Design; Auto Power Recovery; Automatic Emergency Heat; Automatic Indoor Frost Control; Central Desk Control Compatibility; Freeze Sentinel; Heat Pump with Resistance Heat Backup; Heat Pump with Supplemental Resistance Heat; Heat Sentinel; LCDI Power Cord (purchased separately); Proportional - Integral ID Airflow; Quick Heat Recovery; Random Twist/Length Segment Tangential Blower; Remote Thermostat Compatibility; Reverse Cycle Defrost; Universal Heaters; Weather Protected Electrical Components
Product Type	Packaged Terminal Air Conditioners (PTAC)
Temperature Range	60 - 85 F

GE Zoneline® Heat Pump Unit with Corrosion Protection, 230/208 Volt



Model# AZ65H07DAC

APPROXIMATE DIMENSIONS (HxDxW)

- 16 in x 20 13/16 in x 42 in

CAPACITY

- Cooling BTUH (MIN) 7000.00 Btu
- Cooling BTUH (MAX) 7100.00 Btu
- Cooling EER (BTUH / Watt) 13.0/13.0
- CFM Indoor Fan High 360
- CFM Indoor Fan Low 205
- Dehumidification (pts./hr.) 1.60
- Heating - Reverse Cycle - BTUH 6200/6100
- Vent CFM (high fan at zero ESP) 38

WARRANTY

- Parts Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Labor Warranty - Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
- Warranty Notes - See written warranty for full details

Have more questions? Please contact 1-800-626-2005