

Refrigeration Equipment Mega Top Table, 60" with 4 drawers and 24GN1/6 containers - Stainless Steel (R290)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738288 (KCHMT60.24.2D)

4-drawer mega top
preparation table, 60", R290
refrigerant gas, +33/+41°F,
stainless steel

Short Form Specification

Item No.

4-drawer mega top refrigerated preparation table. Exterior back panel in aluminum, exterior bottom panel in galvanized steel, exterior side and top panel in 430 stainless steel; interior back, top and interior bottom panels in 304 stainless steel, worktop in 430 stainless steel.

Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances.

Full-depth cutting board 61x9x0.5 in.

Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature.

Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.

ETL Safety and Sanitation certifications.

3/5 Years warranty.

Main Features

- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- External temperature display.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

Construction


- Self-closing door with 90-degree stay-open feature.
- Heavy duty casters.
- Insulated lid maintains food freshness.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Optional Accessories


- shelf for 60" mega top, salad and undercounter PNC 880596 ☐
- shelf clips PNC 880611 ☐

APPROVAL: _____

Front

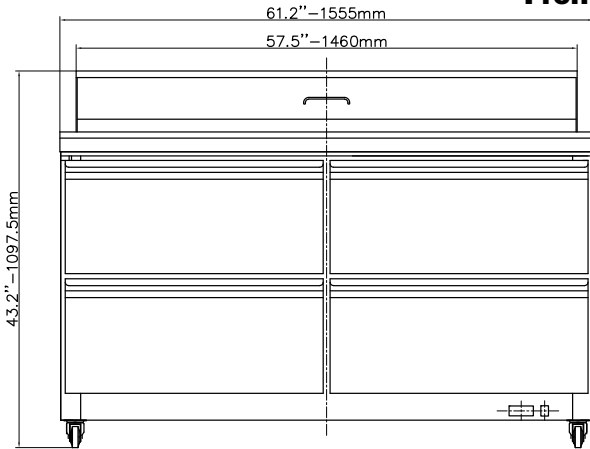


Side

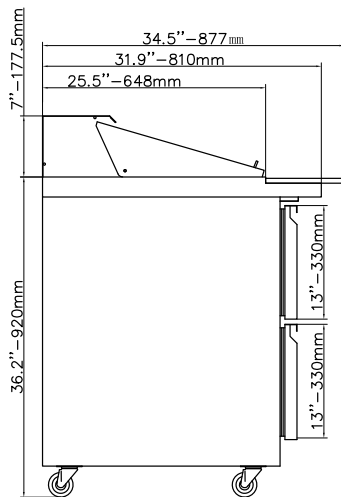

El = Electrical connection

Top

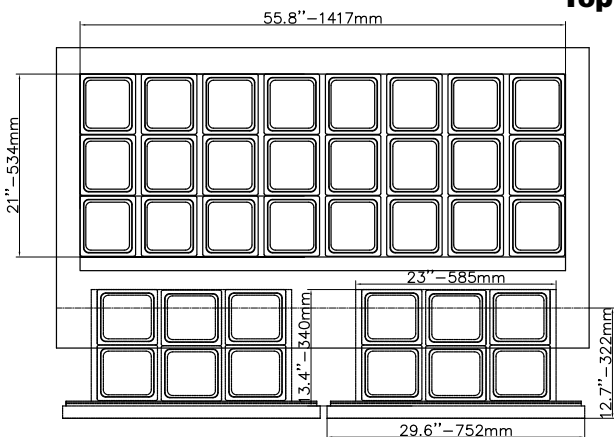

Electric

Supply voltage:

738288 (KCHMT60.24.2D) 115 V/1 ph/60 Hz

Electrical power, max:

0.8 kW

Current consumption:

7.5 Amps

Plug type:

USA NEMA 5-15P

Capacity:

Gross capacity:

15.5 cu.feet

Key Information:

External dimensions, Width:

61 1/4" (1555 mm)

External dimensions, Depth:

34 1/2" (877 mm)

External dimensions, Height:

43 3/16" (1097.5 mm)

Number and type of doors:

Internal Dimensions (depth):

23 13/16"

Internal Dimensions (height):

23 1/2"

Internal Dimensions (width):

56 1/4"

Shipping height:

47 1/4" (1200 mm)

Shipping weight:

364 lbs (165 kg)

Shipping volume:

61.5 ft³ (1.74 m³)

Number and type of grids (included):

1 - Vinyl-Coated Steel

Type of external material:

Stainless Steel

Type of internal material:

Polystyrene

Warranty:

3 / 5 years

Refrigeration Data

Compressor power:

R290

Refrigerant type:

90 g

Refrigerant weight:

Operating temperature min.:

32 °F

Operating temperature max.:

41 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost