

Product Specifications

Style Number	VV012	
Construction	Waterproof Foamed Core	
Edge Profile	Enhanced Painted Bevel	
Nominal Dimensions	7" wide, 48" long	
	US Units	Metric Units
Actual Product Width	7.09"	18 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	20 mil (0.02")	0.5 mm
Overall Product Thickness	0.314"	8 mm
Core Thickness	0.256"	6.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.059"	1.5 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

Packaging

Area per Box	23.64 sq ft	2 sq m
Pieces per Box	10 pcs	
Weight per Box	39.68 lbs	17.99 kg
Boxes per Pallet	35 boxes	



753 Axial Oak



762 Mornington Oak



763 Enderby Oak



765 Aden Oak




771 Aurora Oak



772 Pasadena Oak

COREtec Plus Enhanced Plank 7"

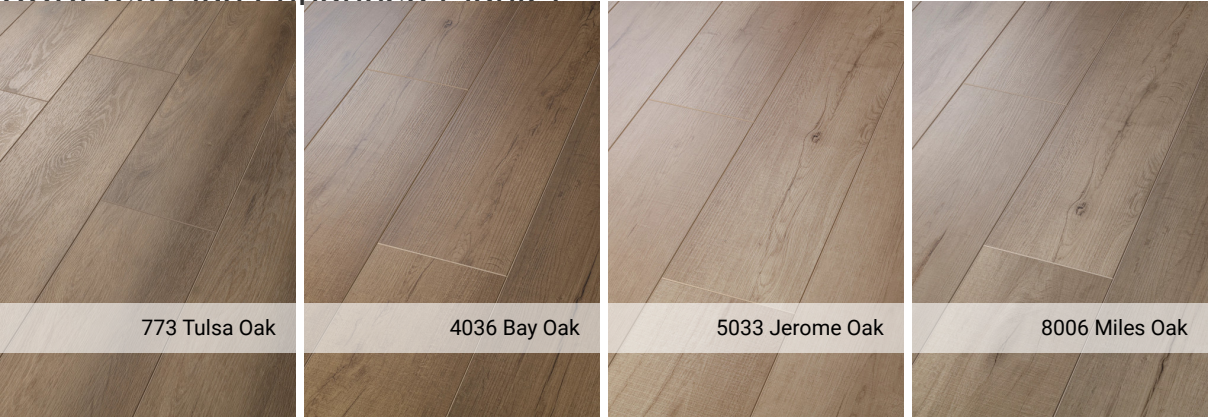

Performance

Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

- USF Lifetime
- Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof
- USF 10 Year Medium Commercial

Certifications

GreenGuard (Certification, Gold, Private Label) Certified

Coordinating Trim

Baby Threshold*
01V19 | 94"
01V20 | 94"

T-Molding*
02V62 | 94"

Quarter Round
01V46 | 94"

Overlap Stairnose*
01V95 | 94"

Flush Stairnose
02V17 | 94"

*Packaged with molding track

Stair Tread

Stair Tread
03Z70 | 48"

