


# Scanno

## Insert hood



Learn  
more

### MEASUREMENTS

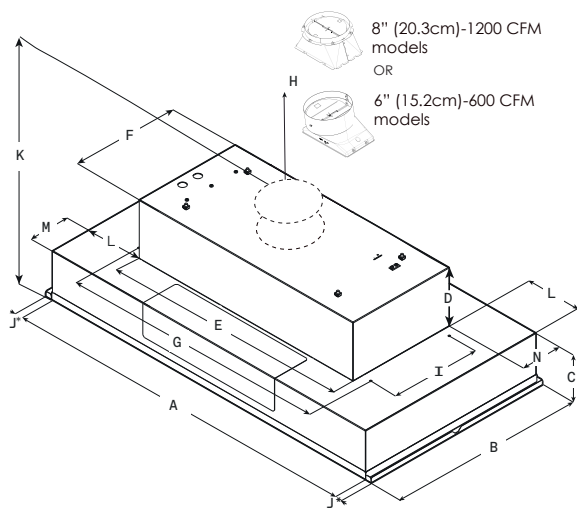

|    | ESC628SS           | ESC134SS           | ESC146SS           |
|----|--------------------|--------------------|--------------------|
| A  | 28 1/2" (71.9 cm)  | 34 1/2" (86.3 cm)  | 46 1/2" (118 cm)   |
| B  | 15 3/4" (40 cm)    |                    |                    |
| C  | 5 7/16" (13.8 cm)  |                    |                    |
| D  | 6 1/2" (16.4 cm)   |                    |                    |
| E  | 22" (56 cm)        | 27 9/16" (70 cm)   |                    |
| F  | 12 7/16" (31.6cm)  |                    |                    |
| G  | 24 5/16" (61.8 cm) | 29 13/16" (75.7cm) |                    |
| H  | 6" (15.2 cm)       | 8" (20.3 cm)       | 8" (20.3 cm)       |
| I  | 10 1/8" (25.7 cm)  |                    |                    |
| J* | 3/4" (1.9 cm)      |                    |                    |
| K  | 16 15/16" (43 cm)  | 17 1/16" (43.4 cm) | 17 1/16" (43.4 cm) |
| L  | 3 1/8" (8 cm)      | 3 7/16" (8.75 cm)  | 9 3/8" (28.3 cm)   |
| M  | 2 5/8" (6.66 cm)   |                    |                    |
| N  | 11/16" (1.83 cm)   |                    |                    |

\*The spacers are optional depending on the width of the cabinet opening.

### DESCRIPTION

Scanno available in 28 1/2", 34 1/2" & 46 1/2" width and only 15 3/4" depth to support shallower cabinetry, and offers 4 speed, 600 and 1200 CFM blowers for extraordinary ventilating power.

The All-In-One design avoids the need to purchase a stainless steel liner. Scanno comes equipped with ergonomic rotating knob controls which discreetly recess out of sight when not in use and long life LED lighting illuminates the cooking surface.

**\*Outdoor Rated Pro Style Hood**



### FEATURES

- Hush system
- Heat guard
- Professional performance
- Grease collectors
- Seamless look



#### GENERAL PROPERTIES

| Width                                  | 28 1/2"                                                                                                         | 34 1/2"                                   | 46 1/2"                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------|-------------------------------------------|
| Model                                  | ESC628SS                                                                                                        | ESC134SS                                  | ESC146SS                                  |
| Dimensions                             | 28 1/2"W x 15 3/4"D x 11 7/8"H                                                                                  | 34 1/2"W x 15 3/4"D x 11 7/8"H            | 46 1/2"W x 15 3/4"D x 11 7/8"H            |
| Blower Type <sup>1</sup><br>(Internal) | 600 CFM (4-speed)                                                                                               | 1200 CFM (4-speed)                        | 1200 CFM (4-speed)                        |
| Noise<br>(Min-max sones) <sup>1</sup>  | 1.7-7.0 Sones                                                                                                   | 1.7-8.5 Sones                             | 1.7-8.5 Sones                             |
| Electrical                             | 120V-60Hz, 490W                                                                                                 | 120V-60Hz, 913W                           | 120V-60Hz, 913W                           |
| Illumination                           | 2 LED, 6.5W, 3000K, 540 Lumen                                                                                   |                                           | 4 LED, 6.5W, 3000K, 540 Lumen             |
| Finish                                 | Stainless Steel                                                                                                 |                                           |                                           |
| Controls                               | Fully Retractable Rotating Knobs with Blue backlighting                                                         |                                           |                                           |
| Grease filters                         | Dishwasher-Safe, Professional Stainless Steel Angled Baffle Filters<br>(2 for 28 1/2", 34 1/2" & 3 for 46 1/2") |                                           |                                           |
| Installation type                      | Ducted or recirculating with kit                                                                                |                                           |                                           |
| Duct Transition                        | 6" Round with Backdraft Damper (Top Only)                                                                       | 8" Round with Backdraft Damper (Top Only) | 8" Round with Backdraft Damper (Top Only) |

#### KITS

| External Blower                 | KIT0153054 (1200 CFM blower, 8" or 10" compatible)                                                      |
|---------------------------------|---------------------------------------------------------------------------------------------------------|
| Inline Blower                   | KIT0154387 (1200 CFM blower, 8" or 10" compatible)                                                      |
| Inline Blower Shell (1200 CFM)  | KIT0179549 (For use with 1200 CFM blower, 8" or 10" compatible)                                         |
| Inline Blower Shell (600 CFM)   | KIT0205342 (For use with 600 CFM blower, 6" compatible)                                                 |
| External Blower Shell           | KIT0179547 (For use with 1200 CFM blower)                                                               |
| Recirculation (600 CFM)         | KIT0192765 (4 round carbon filters) + KIT0195736 (6" round deflector)                                   |
| Recirculation (1200 CFM)        | KIT0192765 (4 round carbon filters) + KIT0192763 (8" round deflector)                                   |
| Electronic CFM Reduction Bypass | KIT0185752 (Achieves <300 CFM for 600 CFM Blower)<br>KIT0185099 (Achieves <400 CFM for 1200 CFM Blower) |
| Transition Reducer Kit          | KIT0185271 (10" round down to 8" round - attaches to 10" round transition)                              |

**WARRANTY:<sup>2</sup>**

**Two (2) Years Parts & In-Home Labor. Earn an additional One (1) Year of Parts & In-Home Labor by registering on [elica.com](http://elica.com)**



The product images shown are for illustration purposes only and may not be an exact representation of the product.

<sup>1</sup> CFM and Noise data indicate the performance of the hood blower tested according to international standards. For AHAM Certified Ratings, established in accordance with California Title 24 Standardized test procedure, please refer to AHAM Certified Product Directory. Electric Ratings are declared according to UL.

<sup>2</sup> For valid warranty extension, register within 3 months from purchase. For USA & Canada Users Only.