CE152T-208/S

FEATURES

Two elements, three zones accommodate different pan sizes

High-frequency pulsation technology for superior performance and control

True simmer setting for soups, sauces and more

Super-low Melt setting for fine chocolate and other delicate foods

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Illuminated touch controls

Hot surface indicator lights when temperature exceeds 150°F

Temperature limiter ensures that safe operating temps are never exceeded

Universal "off" turns all elements off

Control panel lock for safety

Automatic timer up to 99 minutes

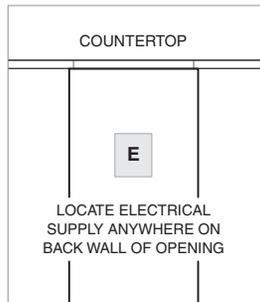Ceran ceramic glass resists scratching, staining, impact and heat

TOP CONFIGURATION

COOKTOP SPECIFICATIONS

- 1–5$^1/_2$" Single Element (1200W)
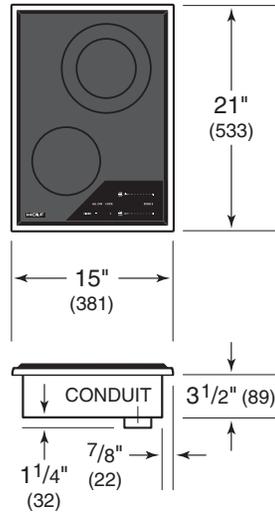
- 1–8" Dual Element (700/2200W)

PRODUCT SPECIFICATIONS

Model	CE152T-208/S
Dimensions	15"W x 3^1/$_2$"H x 21"D
Weight	30 lb
Electrical Supply	3-wire, 208 VAC, 60 Hz
Electrical Service	20 amp dedicated circuit
Conduit Length	4 feet

ELECTRICAL

COUNTERTOP

E

LOCATE ELECTRICAL
SUPPLY ANYWHERE ON
BACK WALL OF OPENING

DIMENSIONS

21"
(533)

15"
(381)

CONDUIT

3^1/2" (89)

7/8"
(22)

1^1/4"
(32)

STANDARD INSTALLATION

2^1/2" (64)

14"
(356)

19^1/2"
(495)

2^1/2" (64)

COUNTERTOP CUT-OUT

13"
(330)

18"
(457)

30"
(762)

2"
(51)

36" (914) min
FLOOR TO
COUNTERTOP

E
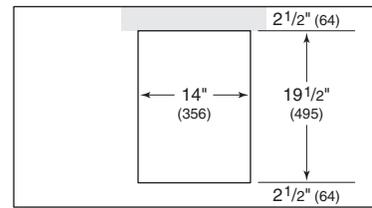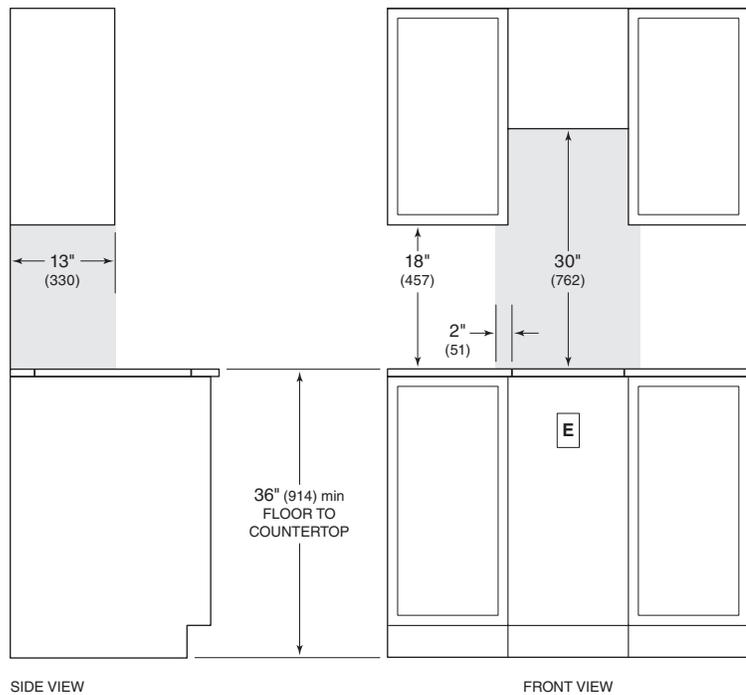
SIDE VIEW

FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.