




CP3 Series

All-in-one built-in design includes liner, blower, filtration, controls, lighting, and damper for easy installation into custom canopy hoods.

- Powered by internal blower system with either 290, 670 or 1300 MAX blower CFM. Quiet 2.0 sones at normal speed.
- Infinite-speed control with separate On/Off speed control gives you the convenience of automatically remembering last setting.
- Two-level LED cooktop lighting. (Bulbs included.)
- Easily accessible, dishwasher-safe stainless steel baffle filters with handles.

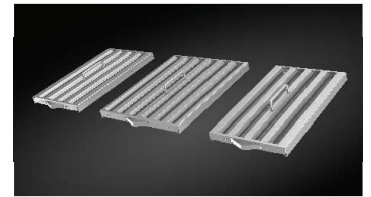

best[®]
PERFORMANCE THAT INSPIRES


At **BEST**, we make high performance range hoods that perform beautifully. Astonishingly quiet. Impressively effective. Remarkably efficient. And perfectly suited for the most distinguished kitchens.

Whether it's the centerpiece of the room or letting its surroundings shine, **BEST** is where high-end performance inspires.


Installation height above the cooking surface: 24"-30"

Allow 1/8" clearance on all measurements

Model CP34, CP35

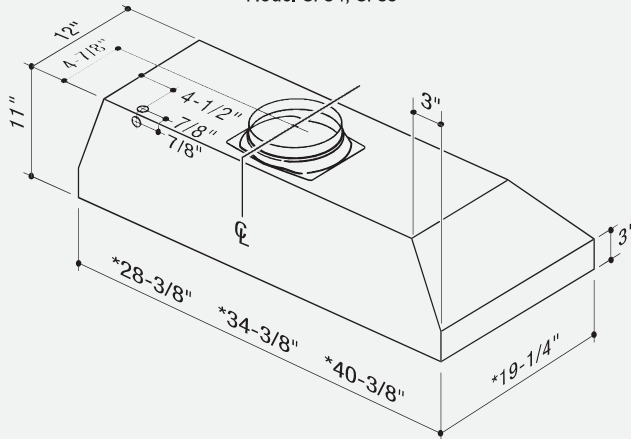

Model CP37

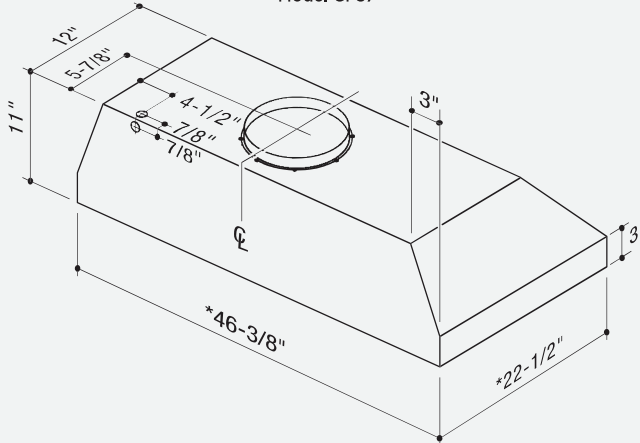

HOOD SIZES*

Internal Blower, Single - Depth: 19-1/4"

30" CP34I309SB, CP35I309SB

36" CP34I369SB, CP35I369SB

42" CP34I429SB, CP35I429SB

Internal Blower, Dual - Depth: 22-1/2"

48" CP37I482SB

* For exact dimensions, please refer to the technical drawing of each model.

FEATURES

Finish	Brushed Stainless Steel (Grade 430)
Lighting Type	LED, 6 W, GU10, R16
Number of Lamps	2
Lighting Levels	2
Lighting Lamps Included	Yes
Control Type	Infinite-Speed Rotary with Separate On/Off Control
Control Features	Heat Sentry™
Remote Control	Not Available
Filter Type	Stainless Steel Baffle
Non-ducted Capability	No

HOOD BLOWER INCLUDED	CP34	CP35	CP37
Internal			
Max Blower CFM*	290	670	1300

ACCESSORIES

Universal MUA Damper	MD6TU, MD8TU, MD10TU
Fresh Air Inlet	641FA, 643FA, 610FA

INSTALLATION REQUIREMENTS

Amps @ 120V	9.0 Max
Electrical Connection	Direct Wire
Duct Size: Internal Blower	CP34 & CP35: 8" CP37: 10"
Duct Direction	Vertical
Backdraft Damper	Included

* MAX Blower CFM indicates the performance of the hood blower in open air and is not HVI certified.

HVI PERFORMANCE

INTERNAL BLOWER – CP34

SONES			
	Low Speed	High Speed	
CP34 Series	3.0	12.0	

CFM			
	Low Speed	High Speed 0.25 in. w.g.	High Speed 0.1 in. w.g.
CP34 Series	120	280	290

INTERNAL BLOWER – CP35

SONES			
	Low Speed	High Speed	
CP35 Series	2.5	11.5	

CFM			
	Low Speed	High Speed 0.25 in. w.g.	High Speed 0.1 in. w.g.
CP35 Series	230	580	600

INTERNAL BLOWER – CP37

SONES			
	Low Speed	High Speed	
CP37 Series	2.5	14.5	

CFM			
	Low Speed	High Speed 0.25 in. w.g.	High Speed 0.1 in. w.g.
CP37 Series	380	1100	1130



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.