

# LF24Z6330S

## 3-Door French Door Refrigerator

23.7 cu. ft. Capacity

Smart Inverter

Zero Clearance™ Hinge System

Multi Air Flow Cooling

Door Cooling

PrintProof Stainless Steel

ThinQ

Water Filter: LT1000P

AVAILABLE COLORS

 PRINTPROOF™ STAINLESS STEEL



### Proactive Smart Alerts to Keep Your Appliances Running Smoothly

## ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

### SUMMARY

Refrigerator (cu.ft.) 15.8  
Freezer (cu.ft.) 7.9  
Total Capacity (cu.ft.) 23.7

### ENERGY

ENERGY STAR® Certified Yes  
Energy Consumption (kWh/Year) 699

### REFRIGERATOR

No. of Shelves 4 Split (4 Fixed)  
Shelf Construction Spill Protector Tempered Glass  
Shelf Trim White décor  
No. of Crisper Bins 2  
Pantry (Glide N Serve) Yes (Normal)  
Light Yes

### REFRIGERATOR DOOR

No. of Door Bins (left door) 3  
No. of Door Bins (right door) 3  
Door Shape Flat  
Handle Type Bar

### ICE & WATER SYSTEM

Dispenser Ice & Water  
No. of In-door Ice Maker 1  
In-door Ice Maker Ice Type Cubed / Crushed  
In-door Ice maker Daily production (lbs) 3.0 / 3.3 (Ice Plus) lbs.  
In-door Ice Storage Capacity 3.0 lbs  
No. Freezer Ice Maker 1  
Freezer Ice Maker Ice Type Cubed  
Freezer Ice maker Daily production (lbs) 2.5 / 2.7 (Ice Plus) lbs.  
Freezer Ice Storage Capacity 4.0 lbs.  
Ice Plus Yes  
Filteration System 1 Stage  
Filter LT1000P

### FREEZER

Door Type Pull Drawer  
Handle Type Pocket Handle  
Drawers / Shelves 2-Tier Organization  
Freezer Light Upper LED Lighting

### COOLING

Compressor Type Smart Inverter Compressor  
Refrigerant R600a / 78g / 2.75oz  
Evaporator 1  
Multi Air Flow Cooling Yes  
Door Cooling Yes  
Temperature Sensors 2

### DISPLAY

Display Type Smooth Touch Control / White LED  
Temperature Control Electronic/ Digital  
Door Alarm Yes  
Child Lock Yes  
Smart Diagnosis Yes  
Auto Closing Door Hinge Yes  
Wi-Fi Enabled Yes  
ThinQ® Yes  
ThinQ® Care Yes  
Sabbath Mode Yes  
ADA Compliant Yes

### MATERIALS & FINISH

Hidden Hinges Yes  
All Available Colors PrintProof™ Stainless Steel  
Insulation Low GWP and Zero ODP Blowing Agent

### DIMENSIONS/CLEARANCES/WEIGHTS


Total (WxHxD)	35 3/4" x 70 1/4" x 29 7/8"
Width	35 3/4"
Height (Top of Hinge or Door cap Décor)	70 1/4"
Depth (with Handles)	29 7/8"
Width (Door Open 90° without Handle)	35 1/8"
Case Edge Clearance (Door Fully Open)	13 7/8" (R) 6 7/8" (L) 6 7/8"
Width (Door Open 90° with Handle)	40"
Width (Door Fully Open without Handle)	45 1/2"
Door Edge Clearance without Handle	2 1/8"
Height to Top of Case	68 7/8"
Height (Floor to Top of Freezer Door)	27 7/8"
Depth without Door	24 3/4"
Depth without Handles	27 1/2"
Depth (to Hinge Cover)	18 1/4"
Depth (Total with Door Open)	48 3/4"
Depth (Drawer Open Fully without Handle)	43 7/8"
Installation Clearance	Sides 5/32", Top 1", Back 2"
Carton Dimensions (WxHxD)	38" x 73" x 30"
Weight (Unit/Carton)	261 lbs / 281 lbs

### LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Inverter Compressor (Parts only)	6-10 Years

### UPC CODES

LF24Z6330S 195174132678

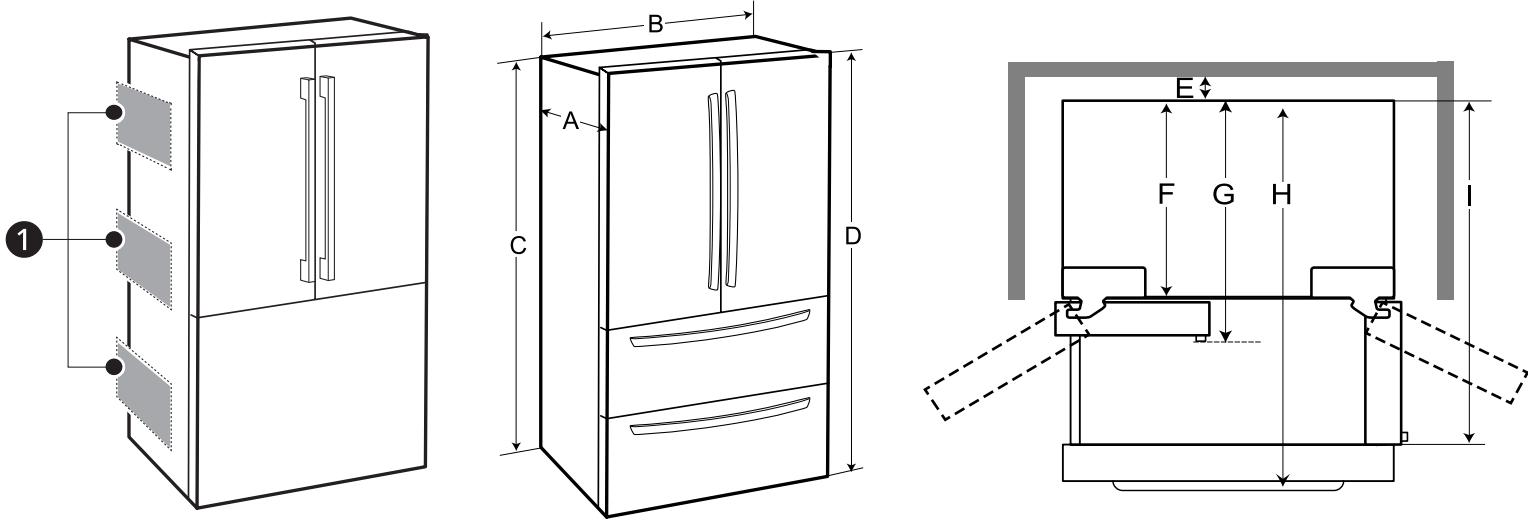

#### DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.
- The space between the product and the side wall must be at least 5/32 in. (4 mm) on both sides. When installing in a narrow space, attach the enclosed spacers on each side 1 of the refrigerator as shown to ensure a minimum clearance of 5/32 in. (4 mm).

#### DIMENSIONS

A	Depth without Handle	27 1/2" (699 mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Side Clearance	5/32" (4mm)
G	Depth without Door	24 3/4" (628mm)
H	Depth with Handle	29 7/8" (759 mm)
I	Depth (Total with Freezer Drawer Open)	46" (1168 mm)
J	Depth (Total with Door Open 90°)	43 7/8" (1114mm)

#### LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or side-to-side.

If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

- Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
- Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

#### NOTE

- A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

