Prepared by
Jessica Norris
catalog@avb.net

Mega Group



Amana® 6.7 Cu. Ft. Dryer with Wrinkle Prevent

AGD4600TW

Available Finishes/Colours

AGD4600TW
White

Amana® 6.7 Cu. Ft. Dryer with Wrinkle Prevent lets you put off folding clothes til later. Use the Quick Dry Cycle to get those light loads done with, and use Automatic Dryness Control for the perfect dry.

Top Features

Wrinkle Prevent

Quick Dry

Automatic Dryness Control

Manuals & Literature:

Dimension Guide
Owners Manual
Warranty Information

Dimensions

Depth	28.5
Height	42.5
Width	29.0

Details

Quad Baffles	No
Maytag Commercial Components	No
Lint Screen Location	Top
Hoses Included	No
Drum Material	Powder Coat

Exterior

Door Style	Side Swing
Reversible Door	Yes
Window	No

Features

Sound Package	No
Stackable	No

Features

LP Convertible	Yes - Optional Kit Available
Automatic Dry Control	Yes
Moisture Sensor	No

Controls

Feedback Status Indicators	No
Control Location	Rear Console
Control Type	Knob & Buttons

Specifications

Top Load Matching	No
Front Load Matching	No
Optional Accessories	3404351, 4396028, W10323246, W11581316

AMANA

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Dimension Guide

Amana® Dryer with Wrinkle Prevent Option - 6.7 cu. ft.


White Available
YAED4600TW - Electric
AED4600TW - Electric
AGD4600TW - Gas

W11835758A

DETAILED PLANNING DIMENSIONS


WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.


Electrical Requirements		
Fuel Type	**Electric**	**Gas**
Minimum Circuit Amperage Rating	30 A	15 A
Maximum AMP Draw	26 A 24 A (Canada)	6 A
Operating Voltage	240 V AC only 230 V AC only (Canada)	120 V AC only
Operating Frequency	60 Hz	

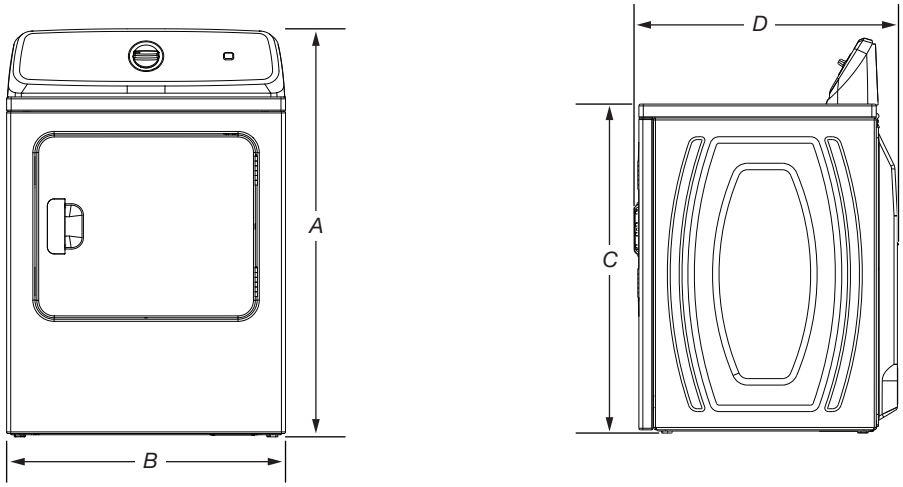

Product Dimensions					
		in (min)	**mm (min)**	**in (max)**	**mm (max)**
A	Height (With Feet)	42½	1080	44⅛	1121
B	Width	29	737	-	-
C	Top Height (With Feet)	35⅜	899	37	940
D	Depth	28½	724	-	-

DETAILED PLANNING DIMENSIONS

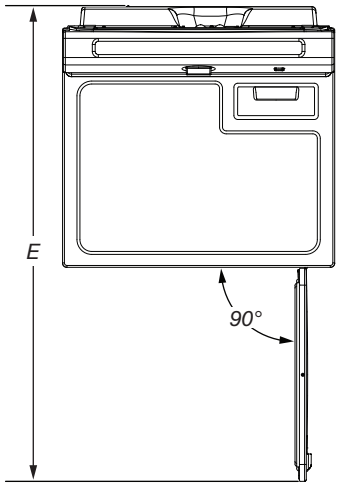

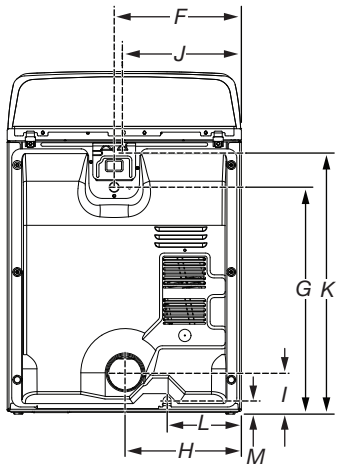


Product Dimensions					
		in (min)	mm (min)	in (max)	mm (max)
E	Depth with Door Open	50¾	1289	-	-
F	Strain Relief from Side (electric)	15¾	400	-	-
G	Strain Relief Height (electric)	28⅛	714	29¾	756
	Power Cord Length (Canadian)	54¾	1391	-	-
H	Exhaust Duct from Side	14½	368	-	-
I	Exhaust Duct Height	5⅛	130	6¾	171
J	Power Cord from Side (gas)	14¾	375	-	-
K	Power Cord Height (gas)	32⅜	822	34	864
	Gas Power Cord Length	60	1524	-	-
L	Gas Connection from Side	9¼	235	-	-
M	Gas Connection Height	1¾	44	3⅜	86

Spacing for recessed area or closet installation

The dimensions shown are for the recommended spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilations openings are acceptable.
- Companion appliance spacing should also be considered.

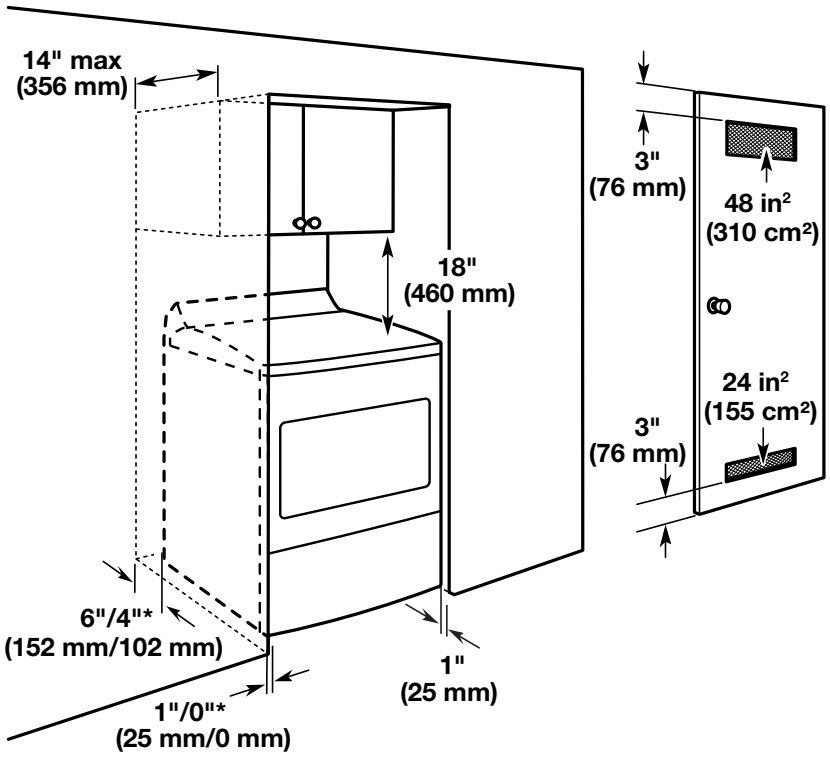

*Recommended/Minimum spacing

Guide de dimensions


Sécheuse de 6,7 pi^3 avec option Wrinkle Prevent (antifroissement) Amana®

Blanc offert
YAED4600TW - Électrique
AED4600TW - Électrique
AGD4600TW - Gaz

DIMENSIONS DE PLANIFICATION DÉTAILLÉES


AVERTISSEMENT : Pour réduire le risque d'incendie, de décharge électrique ou de blessures, lire les INSTRUCTIONS IMPORTANTES DE SÉCURITÉ et INSTRUCTIONS D'INSTALLATION du guide d'utilisation de votre appareil avant d'installer et de faire fonctionner cet appareil.


Spécifications électriques		
Type de combustible	**Électrique**	**Gaz**
Courant minimum du circuit	30 A	15 A
Appel de courant maximum	26 A 24 A (au Canada)	6 A
Tension de fonctionnement	240 V CA seulement 230 V CA seulement (au Canada)	120 V CA seulement
Fréquence de fonctionnement	60 Hz	

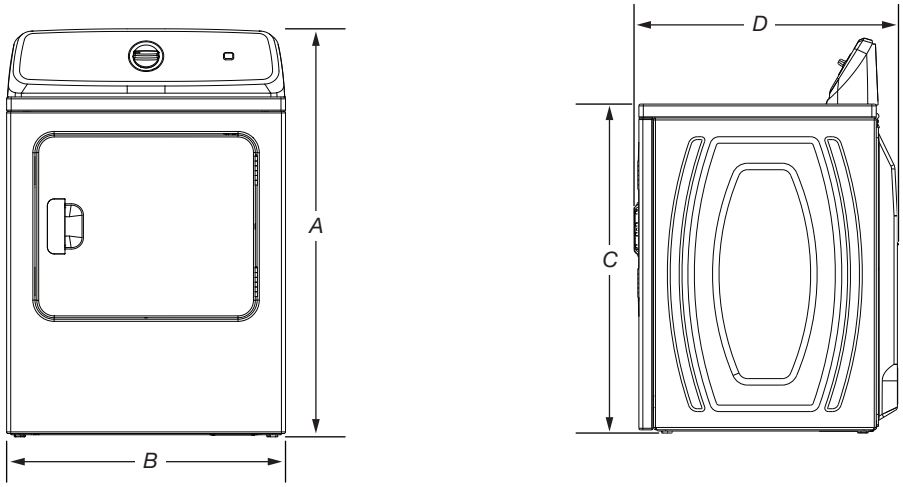

Dimensions du produit					
		po (min)	**mm (min)**	**po (max)**	**mm (max)**
A	Hauteur (avec pieds de nivellement rétractés)	42 ½	1080	44 ⅛	1121
B	Largeur	29	737	-	-
C	Hauteur du dessus (avec pieds au minimum)	35 ⅜	899	37	940
D	Profondeur	28 ½	724	-	-

DIMENSIONS DE PLANIFICATION DÉTAILLÉES

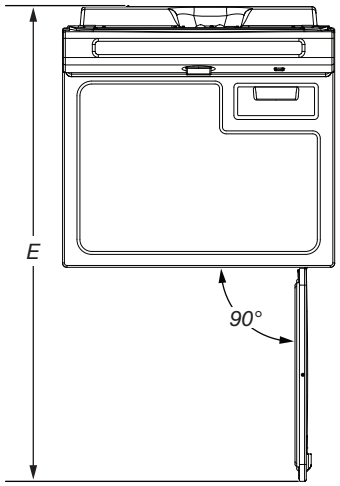

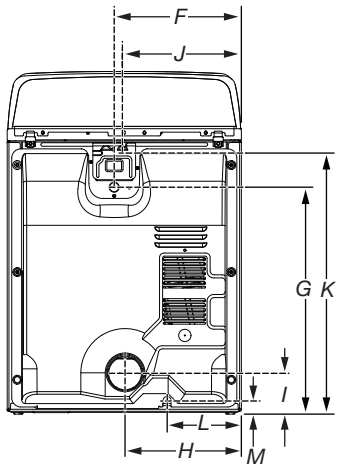


Dimensions du produit					
		po (min)	**mm (min)**	**po (max)**	**mm (max)**
E	Profondeur avec porte ouverte	50 ¾	1289		
F	Réducteur de tension de côté (électrique)	15 ¾	400	-	-
G	Hauteur du réducteur de tension (électrique)	28 ⅛	714	29 ¾	756
	Longueur du cordon d'alimentation (au Canada)	54 ¾	1391	-	-
H	Conduit d'évacuation de côté	14 ½	368	-	-
I	Hauteur du conduit d'évacuation	5 ⅛	130	6 ¾	171
J	Cordon d'alimentation de côté (gaz)	14 ¾	375	-	-
K	Hauteur du cordon d'alimentation (gaz)	32 ⅜	822	34	864
	Longueur du cordon d'alimentation pour le gaz	60	1524	-	-
L	Raccordement au gaz de côté	9 ¼	235	-	-
M	Hauteur du raccordement de l'alimentation en gaz	1 ¾	44	3 ⅜	86

Espacement pour une installation dans un encastrement ou dans un placard

Les dimensions indiquées correspondent à l'espacement recommandé permis.

- Prévoir davantage d'espace pour faciliter l'installation et l'entretien.
- Un espace supplémentaire peut être requis pour les moulures de porte et de plancher et pour les plinthes.
- Un espace supplémentaire de 1 po (25 mm) de tous les côtés de la sécheuse est recommandé pour réduire le transfert du bruit.
- Pour installation dans un placard avec porte, on doit prévoir des ouvertures minimums d'entrée d'air en haut et en bas de la porte. Les portes à claire-voie offrant des ouvertures équivalentes de passage de l'air sont acceptables.
- Il faut aussi prendre en compte l'espace requis entre les appareils voisins.

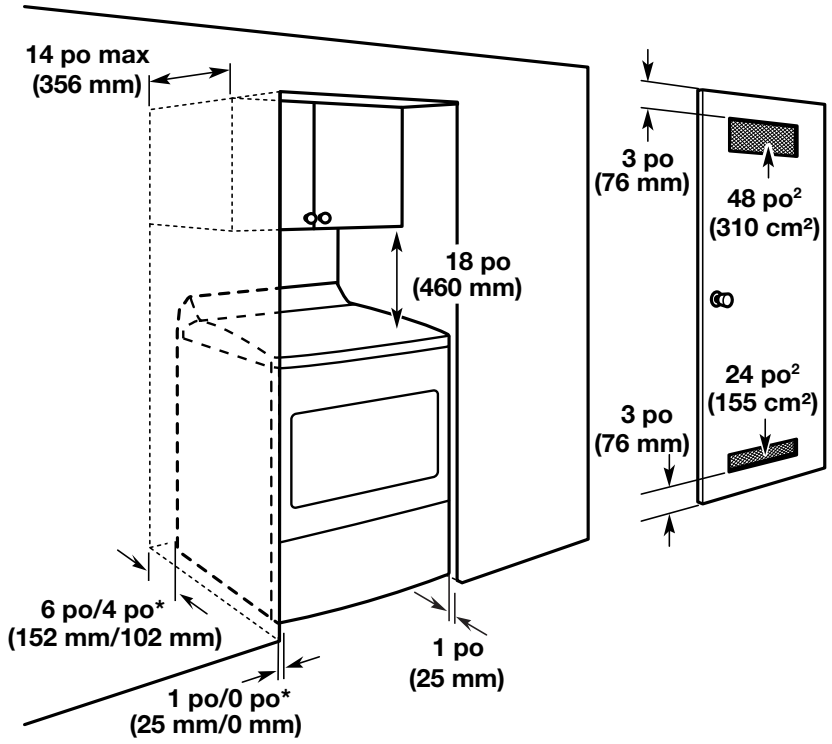

*Dégagement minimum recommandé

®/™ ©2026 Amana. All rights reserved. Used under license in Canada.
Tous droits réservés. Utilisé sous licence au Canada.