

PRO

TITAN

ISLAND

Titan challenges the definition of pro-style hoods with its impressive size, powerful blower, and stunning good looks. Featuring Zephyr's new PowerWave™ blower technology, Titan features a 750-CFM blower with the option to combine two blowers

together to achieve 1,300 CFM. Its unique aerodynamic blades improve efficiency with unparalleled quiet operation. Titan features pro baffle filters, Airflow Control Technology™ (ACT™), and Bloom™ GU10 LED lighting.

**ZEPHYR**


ZEPHYRONLINE.COM

**ACT™** **PowerWave™**


|                                                      | INTERNAL BLOWER<br>STANDARD | INTERNAL BLOWER with ACT™<br>AIRFLOW CONTROL TECHNOLOGY™*                                                                                                                  |           |           |
|------------------------------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|
| SINGLE BLOWER (INCLUDED)<br><b>Min. - Max. CFM</b>   | 200 - 750                   | 200 - 590                                                                                                                                                                  | 200 - 390 | 200 - 290 |
| SINGLE BLOWER (INCLUDED)<br><b>Min. - Max. Sones</b> | 0.5 - 7                     | 0.5 - 5.5                                                                                                                                                                  | 0.5 - 2.5 | 0.5 - 1   |
| DUAL BLOWER (OPTIONAL)<br><b>Min. - Max. CFM</b>     | 350 - 1,300                 | *AIRFLOW CONTROL TECHNOLOGY™ (ACT™)<br>is an exclusive feature built into specific Zephyr hoods which can<br>limit the maximum blower CFM to meet local code requirements. |           |           |
| DUAL BLOWER (OPTIONAL)<br><b>Min. - Max. Sones</b>   | 1 - 8                       |                                                                                                                                                                            |           |           |




Optional Wireless Remote Control

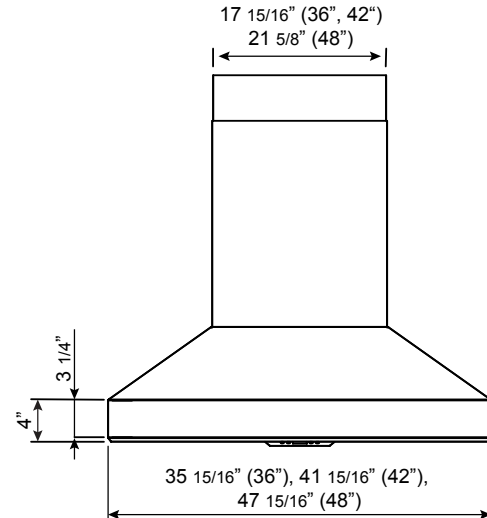

FRONT

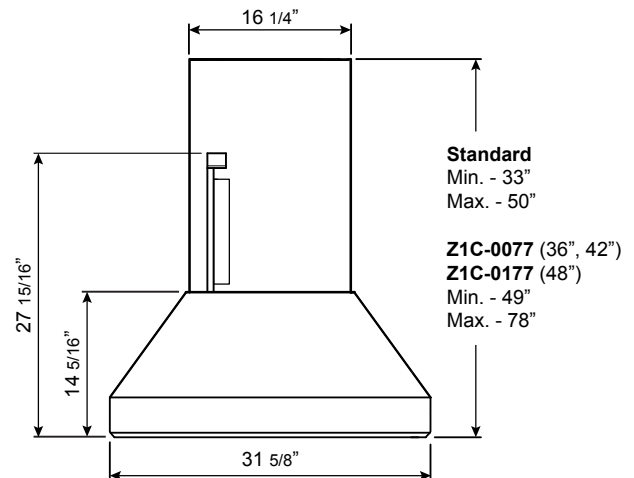

SIDE

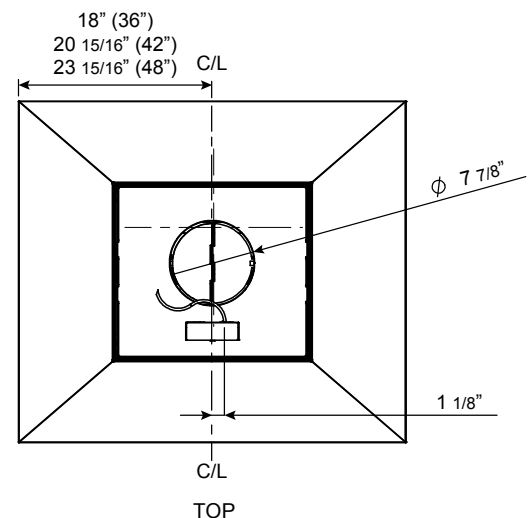

| MODEL                             |                          | AK7736AS                    |           | AK7742AS                    |           | AK7748AS                    |           |           |           |
|-----------------------------------|--------------------------|-----------------------------|-----------|-----------------------------|-----------|-----------------------------|-----------|-----------|-----------|
| Stainless Steel                   |                          |                             |           |                             |           |                             |           |           |           |
| Size                              |                          | 36"                         |           | 42"                         |           | 48"                         |           |           |           |
| Included Single Blower            |                          | 200-750 CFM, 0.5-7 Sones    |           | 200-750 CFM, 0.5-7 Sones    |           | 200-750 CFM, 0.5-7 Sones    |           |           |           |
| ACT 590                           |                          | 200-590 CFM, 0.5-5.5 Sones  |           | 200-590 CFM, 0.5-5.5 Sones  |           | 200-590 CFM, 0.5-5.5 Sones  |           |           |           |
| ACT 390                           |                          | 200-390 CFM, 0.5-2.5 Sones  |           | 200-390 CFM, 0.5-2.5 Sones  |           | 200-390 CFM, 0.5-2.5 Sones  |           |           |           |
| ACT 290                           |                          | 200-290 CFM, 0.5-1 Sones    |           | 200-290 CFM, 0.5-1 Sones    |           | 200-290 CFM, 0.5-1 Sones    |           |           |           |
| Optional Dual Blower              |                          | 350-1,300 CFM, 1-8 Sones    |           | 350-1,300 CFM, 1-8 Sones    |           | 350-1,300 CFM, 1-8 Sones    |           |           |           |
| FEATURES                          |                          |                             |           |                             |           |                             |           |           |           |
| ACT™ Technology                   |                          | Yes                         |           | Yes                         |           | Yes                         |           |           |           |
| Controls                          |                          | Electronic LCD              |           | Electronic LCD              |           | Electronic LCD              |           |           |           |
| Speed Levels                      |                          | 6                           |           | 6                           |           | 6                           |           |           |           |
| Auto Delay-Off                    |                          | Yes                         |           | Yes                         |           | Yes                         |           |           |           |
| CleanAir Function                 |                          | Yes                         |           | Yes                         |           | Yes                         |           |           |           |
| Directional Lighting              |                          | Bloom™ GU10 LED, 6W x2      |           | Bloom™ GU10 LED, 6W x2      |           | Bloom™ GU10 LED, 6W x4      |           |           |           |
| Dual-Level Lighting               |                          | Yes                         |           | Yes                         |           | Yes                         |           |           |           |
| Filters                           |                          | Pro Baffle x4               |           | Pro Baffle x4               |           | Pro Baffle x6               |           |           |           |
| Grease Collection Tray            |                          | Yes                         |           | Yes                         |           | Yes                         |           |           |           |
| Wireless Remote Control           |                          | Yes, Optional               |           | Yes, Optional               |           | Yes, Optional               |           |           |           |
| Recirculating Option              |                          | No                          |           | No                          |           | No                          |           |           |           |
| Duct Cover Extension Option       |                          | Yes                         |           | Yes                         |           | Yes                         |           |           |           |
| ADA Compliant                     |                          | Yes (w/ remote accessory)   |           | Yes (w/ remote accessory)   |           | Yes (w/ remote accessory)   |           |           |           |
| DUCT SPECIFICATIONS               |                          |                             |           |                             |           |                             |           |           |           |
| Vertical Single Internal Blower   |                          | 8" Round                    |           | 8" Round                    |           | 8" Round                    |           |           |           |
| Horizontal Single Internal Blower |                          | NA                          |           | NA                          |           | NA                          |           |           |           |
| Vertical Dual Internal Blower     |                          | 10" Round                   |           | 10" Round                   |           | 10" Round                   |           |           |           |
| Horizontal Dual Internal Blower   |                          | NA                          |           | NA                          |           | NA                          |           |           |           |
| AC POWER (Single Blower)          |                          | 120V, 60Hz at Max. 5A       |           | 120V, 60Hz at Max. 5A       |           | 120V, 60Hz at Max. 5A       |           |           |           |
| AC POWER (Dual Blower)            |                          | 120V, 60Hz at Max. 8A       |           | 120V, 60Hz at Max. 8A       |           | 120V, 60Hz at Max. 8A       |           |           |           |
| OPTIONAL ACCESSORIES              |                          |                             |           |                             |           |                             |           |           |           |
| Wireless Remote Control           |                          | 14000005                    |           | 14000005                    |           | 14000005                    |           |           |           |
| Dual Internal Blower              |                          | PBD-1300A                   |           | PBD-1300A                   |           | PBD-1300A                   |           |           |           |
| Duct Cover Extension              |                          | Z1C-0077                    |           | Z1C-0077                    |           | Z1C-0177                    |           |           |           |
| Make-Up Air Kit (Single Blower)   |                          | MUA008A                     |           | MUA008A                     |           | MUA008A                     |           |           |           |
| Make-Up Air Kit (Dual Blower)     |                          | MUA010A                     |           | MUA010A                     |           | MUA010A                     |           |           |           |
| MOUNTING HEIGHT RANGE**           |                          | 24" - 36"                   |           | 24" - 36"                   |           | 24" - 36"                   |           |           |           |
| WARRANTY                          |                          | 3 years parts, 1 year labor |           | 3 years parts, 1 year labor |           | 3 years parts, 1 year labor |           |           |           |
| CEILING HEIGHT                    |                          | 8'                          | 8.5'      | 9'                          | 9.5'      | 10'                         | 10.5'     | 11'       | 12'       |
| STANDARD DUCT COVER               | Ducted Mounting Height** | 24" - 27"                   | 24" - 33" | 24" - 36"                   | 28" - 36" | 34" - 36"                   | NA        | NA        | NA        |
| DUCT COVER EXTENSION              | Ducted Mounting Height** | NA                          | NA        | NA                          | 24" - 29" | 24" - 35"                   | 24" - 36" | 24" - 36" | 30" - 36" |

\*ACT™ only available with single internal blower.

\*\*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

**ACT™** AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

**PowerWave™**

POWERWAVE™ 3-PHASE BLOWER TECHNOLOGY delivers best-in-class performance with unparalleled quiet operation. It provides more power while minimizing noise and improving efficiency. Plus, its 1,300 CFM blower option makes it the most powerful dual-internal blower on the market.

Specifications subject to change, check [zephyronline.com](http://zephyronline.com) for up-to-date information.  
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

JAN20.0201

