

GR304



FEATURES

- Control temperature precisely with four dual-stacked, sealed gas burners for higher highs, lower lows
- Enjoy quicker heat and more even cooking with this large capacity gas convection oven
- Produce crisper crusts and faster sears with the powerful infrared interior broiler
- Re-ignites flame automatically with our spark ignition system for improved temperature control and added safety
- Move pots and pans easily across continuous cast-iron grates
- Clean up sloshes and spills easily with the seamless, sealed, black porcelain-coated burner pans
- Find your kitchen style with a choice of iconic red, black, or brushed stainless steel control knobs

ACCESSORIES

- 2-Burner Wok Grate
- 2-Burner Wok Grate
- Bake Stone Kit
- Filler Trim
- Front Leg Covers
- Full-Extension Ball Bearing Rack
- Stainless Steel Kickplate
- Brushed stainless, brass or chrome bezels
- High altitude conversion kits available
- Signature red, black or brushed stainless control knobs
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu burner
- 3 - 15,000 Btu burners


OVEN INTERIOR SPECIFICATIONS

- 30,000 Btu oven burner
- 18,000 Btu oven broiler


PRODUCT SPECIFICATIONS

Model	GR304
Dimensions	29 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	2.5 cu. ft.
Oven 1 Overall Capacity	4.4 cu. ft.
Door Clearance	19 1/2"
Weight	413 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type

ELECTRICAL




GAS




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

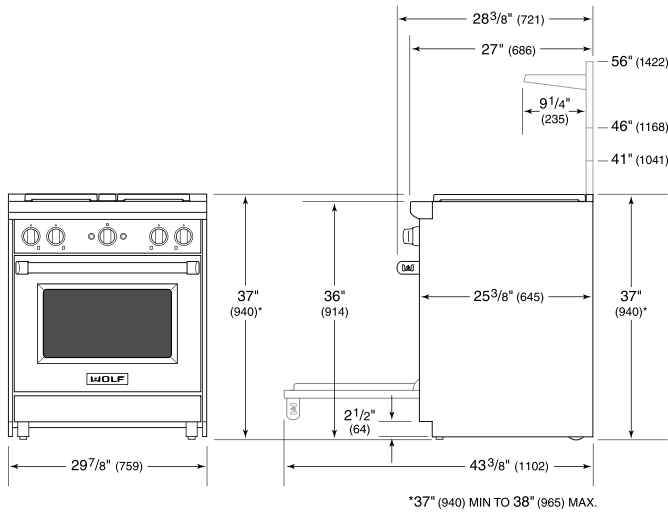

STANDARD INSTALLATION

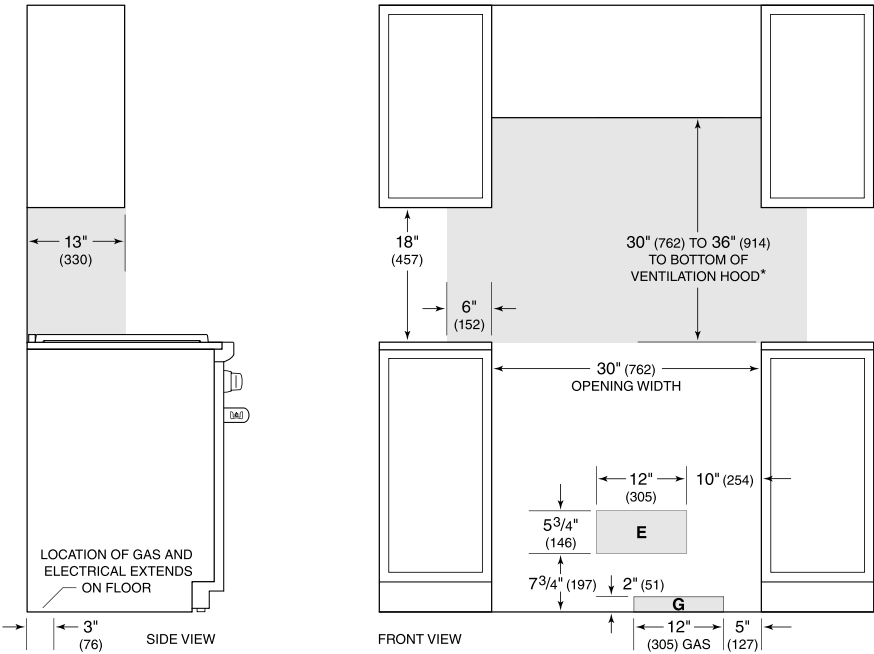

**Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.*
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.