



# PVB94DT GE Profile™ 30" Telescopic Downdraft System


## Dimensions and Installation Information (in inches)

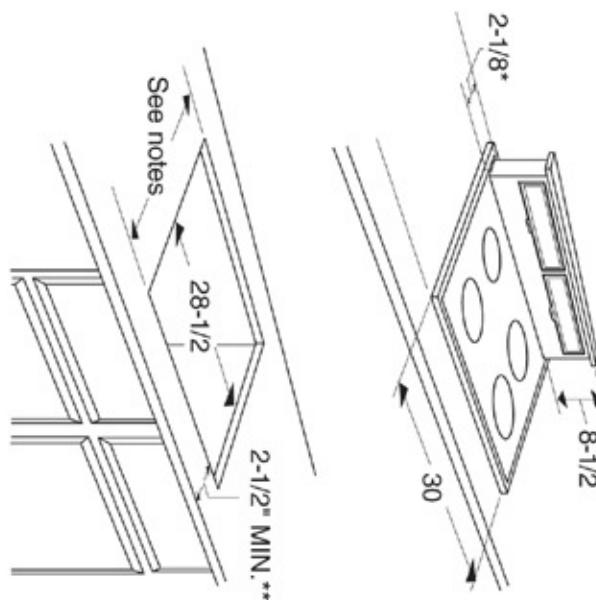

## Through the Floor Venting Options (in inches)

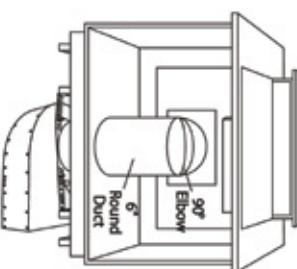

### In Cabinet Discharge (Down)

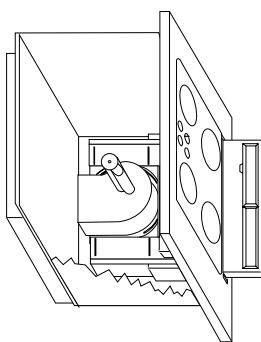

**Note:** Telescopic downdraft vents are not recommended to be installed with cooktops that are flush mounted.

Approved for use with the following GE Profile™ and GE cooktops—30" electric models, 30" gas sealed burner models and 30" induction models.

Not Approved for use with standard burner gas cooktops.

**Note:** The cooktop must be at least 26" deep with a flat surface area of 23-1/2" or more, front to back. In addition, other clearances to the front edge of the countertop must be considered.

**Note:** Dimensions shown are for reference only. Before cutting out countertop, refer to instructions packed with **downdraft and cooktop**.

Note: Installation on cabinets/countertops against the wall will not be possible in most applications. Against the wall installations are limited to dimension requirements. Refer to installation instructions packed with product for further details.

**JXR667 Indoor Remote Accessory.** Optional accessory may be ordered for installation of motor and blower assembly in an indoor remote location.

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® service, 800.626.2000.



imagination at work



Listed by  
Underwriters  
Laboratories


# PVB94DT GE Profile™ 30" Telescopic Downdraft System

## Venting Duct Information

| Duct Pieces   | Equivalent Length*      | Duct Pieces   | Equivalent Length* |
|---|-------------------------|---|--------------------|
|    | 1 ft. (per foot length) |    | 2 ft.              |
|    | 1 ft. (per foot length) |   | 4 ft.              |
|  | 12 ft.                  |  | 4 ft.              |
|  | 7 ft.                   |  | 24 ft.             |
|  | 14 ft.                  |  | 24 ft.             |
|  | 12 ft.                  |  | 24 ft.             |
|  | 33 ft.                  |  | 24 ft.             |
|  | 2 ft.                   |  | 24 ft.             |
|  | 33 ft.                  |  | 24 ft.             |
|  | 2 ft.                   |  | 24 ft.             |

### SHOULD NOT EXCEED 100 EQUIVALENT FT.

\*Equivalent length of duct pieces are based on actual test conducted by GE Evaluation Engineering and reflect requirements for good venting performance with a downdraft system rated at 390 CFM

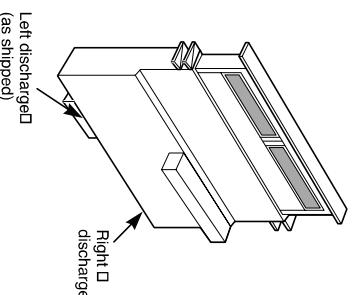

### Steps to Determine Flexible Ducting's Equivalent Length

1. Measure the actual amount of offset (Maximum 3" recommended). The effect upon airflow is dependent upon the amount of offset.

2. Calculate the equivalent ducting allowances using:  

$$(\text{in. offset}) \times (14 \text{ Ft. per inch})$$
  

$$= \text{Ft. equivalent length.}$$

3. Ensure that the total equivalent length of ducting does not exceed the maximum recommendation of 100 feet.

For answers to your Monogram®, GE Profile™, or GE® appliance questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® service, 800.626.2000.



imagination at work



Listed by  
Underwriters  
Laboratories

# PVB94DT GE Profile™ 30" Telescopic Downdraft System

## Features and Benefits

- Telescopic Downdraft Hood - Hood raises over cooktop surface and retracts when not in use
- 390 CFM - Powerful 390 CFM performance removes smoke and vapors from the cooking area
- 4-speed exhaust system effectively pulls smoke and vapors of the cooktop
- ADA Compliant™ All controls are mounted remotely
- Removable Grease Filter - Durable filters can be removed for easy cleaning and maintenance
- Optional Indoor Remote Blower Kit - JXRB67
- Model PVB94DTBB - Black on Black

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® service, 800.626.2000.



imagination at work